
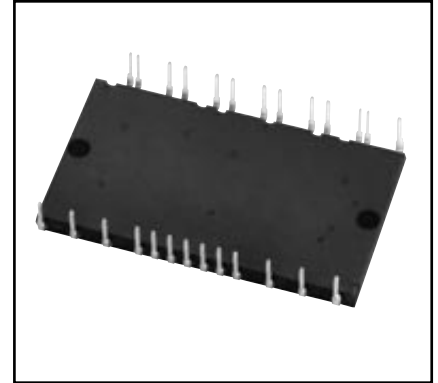


### DIP-CIB

3Ø Converter + 3Ø Inverter + Brake  
30 Amperes/600 Volts

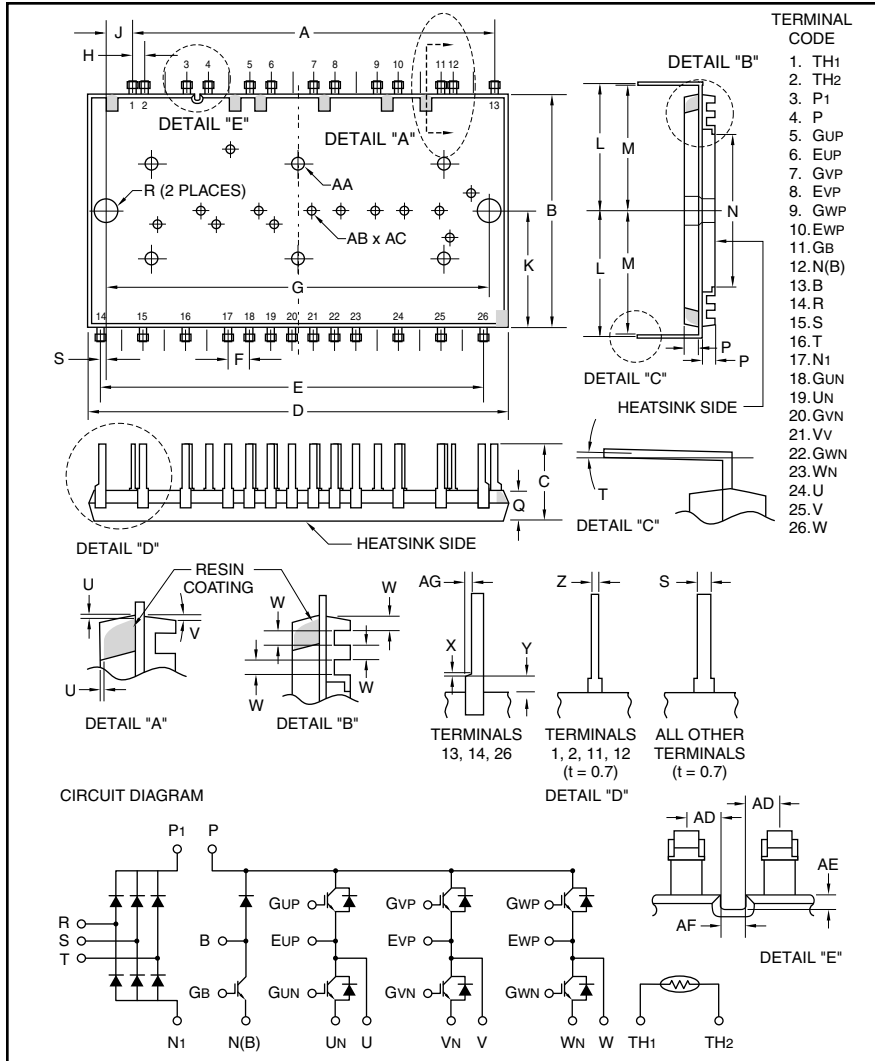

#### Description:

DIP-CIBs are low profile, thermally efficient, transfer mold modules. Each module consists of a three-phase diode converter section, a three-phase inverter section and a brake circuit. Open emitters allow the designer to sense the current in each phase leg for accurate and low cost current sensing. A thermistor is included in the package for sensing the base-plate temperature. 5th Generation CSTBT chips yield low loss. The module is completely Pb-Free and hence RoHS compliant.

#### Features:

- Compact Package
- Only 5.7mm Thick
- One Package for Entire Family
- Thermistor
- Open Emitters

#### Applications:

- AC Motor Control
- Servo Motors
- Robotics
- HVAC Inverters

#### Ordering Information:

CP30TD1-12A is a 600 Volt, 30 Ampere DIP-CIB low profile, thermally efficient, transfer mold module.

#### Outline Drawing and Circuit Diagram

| Dimensions | Inches    | Millimeters |
|------------|-----------|-------------|
| A          | 2.68      | 68.0        |
| B          | 1.73      | 44.0        |
| C          | 0.58±0.02 | 14.7±0.5    |
| D          | 3.1       | 79.0        |
| E          | 2.83      | 72.0        |
| F          | 0.16±0.01 | 4.0±0.3     |
| G          | 2.83±0.01 | 72.0±0.3    |
| H          | 0.08±0.01 | 2.0±0.3     |
| J          | 0.2±0.008 | 5.0±0.2     |
| K          | 0.87      | 22.0        |
| L          | 0.96±0.01 | 24.3±0.3    |
| M          | 0.94±0.02 | 23.9±0.5    |
| N          | 1.14      | 29.0        |
| P          | 0.098     | 2.5         |
| Q          | 0.22±0.02 | 5.7±0.5     |
| R          | 0.18      | 4.5         |

| Dimensions | Inches      | Millimeters |
|------------|-------------|-------------|
| S          | 0.04±0.008  | 1.0±0.2     |
| T          | 0-5°        | 0-5°        |
| U          | 0 Min.      | 0 Min.      |
| V          | 8°          | 8°          |
| W          | 0.04        | 1.1         |
| X          | 0.02 Max.   | 0.5 Max.    |
| Y          | 0.06        | 1.6         |
| Z          | 0.023±0.008 | 0.6±0.2     |
| AA         | 0.08 Dia.   | 2.0 Dia.    |
| AB         | 0.1 Dia.    | 2.5 Dia.    |
| AC         | 0.03 Deep   | 0.8 Deep    |
| AD         | 0.057       | 1.45        |
| AE         | 0.023       | 0.6         |
| AF         | 0.04        | 1.1         |
| AG         | 0.02±0.008  | 0.5±0.2     |



Powerex, Inc., 173 Pavilion Lane, Youngwood, Pennsylvania 15697 (724) 925-7272

**CP30TD1-12A**  
**DIP-CIB**  
**3Ø Converter + 3Ø Inverter + Brake**  
**30 Amperes/600 Volts**

**Absolute Maximum Ratings,  $T_j = 25\text{ }^\circ\text{C}$  unless otherwise specified**

| Ratings  | Symbol    | CP30TD1-12A | Units            |
|--|-----------|-------------|------------------|
| Junction Temperature*  | $T_j$     | -20 to 150  | $^\circ\text{C}$ |
| Storage Temperature  | $T_{stg}$ | -40 to 125  | $^\circ\text{C}$ |
| Mounting Torque, M4 Mounting Screws  | —         | 13          | in-lb            |
| Module Weight Typical  | —         | 52          | Grams            |
| Isolation Voltage (60Hz, Sinusoidal, AC 1 Min., Applied Between Pins and Heatsink) | $V_{ISO}$ | 2500        | Volts            |

**Inverter Part**

|  |                 |          |         |
|--|-----------------|----------|---------|
| Collector-Emitter Voltage (G-E Short)                      | $V_{CES}$       | 600      | Volts   |
| Gate-Emitter Voltage (C-E Short)                           | $V_{GES}$       | $\pm 20$ | Volts   |
| Collector Current** (DC, $T_C = 58^\circ\text{C}$ )        | $I_C$           | 30       | Amperes |
| Peak Collector Current*** (Pulse)                          | $I_{CM}$        | 60       | Amperes |
| Maximum Collector Dissipation ( $T_C = 25^\circ\text{C}$ ) | $P_C$           | 114      | Watts   |
| Emitter Current* (DC, $T_C = 56^\circ\text{C}$ )           | $I_E^{****}$    | 30       | Amperes |
| Peak Emitter Current** (Pulse)                             | $I_{EM}^{****}$ | 60       | Amperes |

**Brake Part**

|  |           |          |         |
|--|-----------|----------|---------|
| Collector-Emitter Voltage (G-E Short)  | $V_{CES}$ | 600      | Volts   |
| Gate-Emitter Voltage (C-E Short)   | $V_{GES}$ | $\pm 20$ | Volts   |
| Collector Current* (DC, $T_C = 98^\circ\text{C}$ )                                     | $I_C$     | 15       | Amperes |
| Peak Collector Current** (Pulse)   | $I_{CM}$  | 30       | Amperes |
| Maximum Collector Dissipation ( $T_C = 25^\circ\text{C}$ , $T_j < 150^\circ\text{C}$ ) | $P_C$     | 83       | Watts   |
| Repetitive Peak Reverse Voltage (Clamp Diode Part)                                     | $V_{RRM}$ | 600      | Volts   |
| Forward Current (Clamp Diode Part, $T_j < 150^\circ\text{C}$ )                         | $I_{FM}$  | 15       | Amperes |

**Converter Part**

|  |           |     |                      |
|--|-----------|-----|----------------------|
| Repetitive Peak Reverse Voltage  | $V_{RRM}$ | 800 | Volts                |
| Recommended AC Input Voltage   | $E_a$     | 220 | Volts                |
| DC Output Current (Three-phase Rectifying Circuit)                     | $I_O$     | 30  | Amperes              |
| Surge Forward Current (1/2 Cycle at 60 Hz, Peak Value, Non-repetitive) | $I_{FSM}$ | 315 | Amperes              |
| $I^2t$ for Fusing (Value for 1 Cycle of Surge Current)                 | $I^2t$    | 416 | $\text{A}^2\text{s}$ |

\*It is recommended to limit the average junction temperature below  $125^\circ\text{C}$  to ensure safe operation.

\*\* $T_C$  is measured just underneath the power chip.

\*\*\*Pulse width and repetition rate should be such that the device junction temperature ( $T_j$ ) does not exceed  $T_{j(max)}$  rating.

\*\*\*\* $I_E$ ,  $V_{EC}$ ,  $t_{rr}$ , and  $Q_{rr}$  represent characteristics of the anti-parallelled emitter-to-collector free-wheel diode (FWD).



Powerex, Inc., 173 Pavilion Lane, Youngwood, Pennsylvania 15697 (724) 925-7272

**CP30TD1-12A**

**DIP-CIB**

**3Ø Converter + 3Ø Inverter + Brake**

30 Amperes/600 Volts

**Electrical Characteristics,  $T_j = 25^\circ\text{C}$  unless otherwise specified**

| Characteristics                | Symbol        | Test Conditions                                    | Min. | Typ. | Max. | Units    |
|--------------------------------|---------------|--|------|------|------|----------|
| <b>Inverter Part</b>           |               |  |      |      |      |          |
| Collector-Cutoff Current       | $I_{CES}$     | $V_{CE} = V_{CES}, V_{GE} = 0V$                    | —    | —    | 1.0  | mA       |
| Gate-Emitter Threshold Voltage | $V_{GE(th)}$  | $I_C = 3.0mA, V_{CE} = 10V$                        | 5.0  | 6.0  | 7.0  | Volts    |
| Gate-Emitter Cutoff Current    | $I_{GES}$     | $V_{GE} = 20V, V_{CE} = 0V$                        | —    | —    | 1.0  | $\mu A$  |
| Collector-Emitter              | $V_{CE(sat)}$ | $I_C = 30A, V_{GE} = 15V, T_j = 25^\circ\text{C}$  | —    | 1.7  | 2.2  | Volts    |
| Saturation Voltage*            |               | $I_C = 30A, V_{GE} = 15V, T_j = 125^\circ\text{C}$ | —    | 1.8  | —    | Volts    |
| Input Capacitance              | $C_{ies}$     |  | —    | 2.36 | —    | nF       |
| Output Capacitance             | $C_{oes}$     | $V_{CE} = 10V, V_{GE} = 0V, f = 1MHz$              | —    | 0.36 | —    | nF       |
| Reverse Transfer Capacitance   | $C_{res}$     |  | —    | 0.09 | —    | nF       |
| Total Gate Charge              | $Q_G$         | $V_{CC} = 300V, I_C = 30A, V_{GE} = 15V$           | —    | 98   | —    | nC       |
| Turn-on Delay Time             | $t_{d(on)}$   |  | —    | 80   | —    | ns       |
| Turn-on Rise Time              | $t_r$         | $V_{CC} = 300V, I_C = 30A,$                        | —    | 50   | —    | ns       |
| Turn-off Delay Time            | $t_{d(off)}$  | $V_{GE} = \pm 15V, R_G = 22\Omega,$                | —    | 200  | —    | ns       |
| Turn-off Fall Time             | $t_f$         | $T_j = 25^\circ\text{C},$                          | —    | 400  | —    | ns       |
| Reverse Recovery Time**        | $t_{rr}$      | Inductive Load                                     | —    | —    | —    | ns       |
| Reverse Recovery Charge**      | $Q_{rr}$      |  | —    | —    | —    | $\mu C$  |
| Emitter-Collector Voltage**    | $V_{EC}$      | $I_E = 30A, V_{GE} = 0V$                           | —    | 1.7  | 2.2  | Volts    |
| External Gate Resistance       | $R_G$         | —  | 22   | —    | 220  | $\Omega$ |

**Brake Part**

|                                |               |  |     |      |     |          |
|--------------------------------|---------------|--|-----|------|-----|----------|
| Collector-Cutoff Current       | $I_{CES}$     | $V_{CE} = V_{CES}, V_{GE} = 0V$                    | —   | —    | 1.0 | mA       |
| Gate-Emitter Threshold Voltage | $V_{GE(th)}$  | $I_C = 1.5mA, V_{CE} = 10V$                        | 5.0 | 6.0  | 7.0 | Volts    |
| Gate-Emitter Cutoff Current    | $I_{GES}$     | $V_{GE} = 20V, V_{CE} = 0V$                        | —   | —    | 1.0 | $\mu A$  |
| Collector-Emitter              | $V_{CE(sat)}$ | $I_C = 15A, V_{GE} = 15V, T_j = 25^\circ\text{C}$  | —   | 1.7  | 2.2 | Volts    |
| Saturation Voltage*            |               | $I_C = 15A, V_{GE} = 15V, T_j = 125^\circ\text{C}$ | —   | 1.8  | —   | Volts    |
| Input Capacitance              | $C_{ies}$     |  | —   | 1.2  | —   | nF       |
| Output Capacitance             | $C_{oes}$     | $V_{CE} = 10V, V_{GE} = 0V, f = 1MHz$              | —   | 0.2  | —   | nF       |
| Reverse Transfer Capacitance   | $C_{res}$     |  | —   | 0.05 | —   | nF       |
| Total Gate Charge              | $Q_G$         | $V_{CC} = 300V, I_C = 15A, V_{GE} = 15V$           | —   | 49   | —   | nC       |
| Turn-on Delay Time             | $t_{d(on)}$   |  | —   | 80   | —   | ns       |
| Turn-on Rise Time              | $t_r$         | $V_{CC} = 300V, I_C = 15A,$                        | —   | 50   | —   | ns       |
| Turn-off Delay Time            | $t_{d(off)}$  | $V_{GE} = \pm 15V, R_G = 42\Omega,$                | —   | 200  | —   | ns       |
| Turn-off Fall Time             | $t_f$         | $T_j = 25^\circ\text{C},$                          | —   | 400  | —   | ns       |
| Reverse Recovery Time          | $t_{rr}$      | Inductive Load                                     | —   | —    | —   | ns       |
| Reverse Recovery Charge        | $Q_{rr}$      |  | —   | —    | —   | $\mu C$  |
| Forward Voltage Drop           | $V_{FM}$      | $I_F = 15A, \text{Clamp Diode Part}$               | —   | 1.7  | 2.2 | Volts    |
| External Gate Resistance       | $R_G$         | —  | 42  | —    | 420 | $\Omega$ |

\*Pulse width and repetition rate should be such as to cause negligible temperature rise.

\*\* $T_C$  is measured just underneath the power chip.



Powerex, Inc., 173 Pavilion Lane, Youngwood, Pennsylvania 15697 (724) 925-7272

**CP30TD1-12A**  
**DIP-CIB**  
**3Ø Converter + 3Ø Inverter + Brake**  
**30 Amperes/600 Volts**

**Electrical Characteristics, T<sub>j</sub> = 25 °C unless otherwise specified**

| Characteristics            | Symbol           | Test Conditions  | Min. | Typ. | Max. | Units |
|----------------------------|------------------|--|------|------|------|-------|
| <b>Converter Part</b>      |                  |  |      |      |      |       |
| Repetitive Reverse Current | I <sub>RRM</sub> | V <sub>R</sub> = V <sub>RRM</sub> , T <sub>j</sub> = 125°C | —    | —    | 1.0  | mA    |
| Forward Voltage Drop       | V <sub>FM</sub>  | I <sub>F</sub> = 20A                                       | —    | 1.1  | 1.4  | Volts |

**Thermal and Mechanical Characteristics, T<sub>j</sub> = 25 °C unless otherwise specified**

| Characteristics            | Symbol               | Test Conditions                     | Min. | Typ.  | Max. | Units |
|----------------------------|----------------------|-------------------------------------|------|-------|------|-------|
| <b>Common Rating</b>       |                      |                                     |      |       |      |       |
| Contact Thermal Resistance | R <sub>th(c-f)</sub> | Case-to-Fin, Thermal Grease Applied | —    | 0.047 | —    | °C/W  |

**Inverter Part**

|                                      |                       |                           |   |   |     |      |
|--------------------------------------|-----------------------|---------------------------|---|---|-----|------|
| Thermal Resistance, Junction to Case | R <sub>th(j-c)Q</sub> | IGBT Part, Per 1/6 Module | — | — | 1.1 | °C/W |
| Thermal Resistance, Junction to Case | R <sub>th(j-c)D</sub> | FWDi Part, Per 1/6 Module | — | — | 1.4 | °C/W |

**Brake Part**

|                                      |                       |           |   |   |     |      |
|--------------------------------------|-----------------------|-----------|---|---|-----|------|
| Thermal Resistance, Junction to Case | R <sub>th(j-c)Q</sub> | IGBT Part | — | — | 1.4 | °C/W |
| Thermal Resistance, Junction to Case | R <sub>th(j-c)D</sub> | FWDi Part | — | — | 2.0 | °C/W |

**Converter Part**

|                                      |                      |                |   |   |     |      |
|--------------------------------------|----------------------|----------------|---|---|-----|------|
| Thermal Resistance, Junction to Case | R <sub>th(j-c)</sub> | Per 1/6 Module | — | — | 1.1 | °C/W |
|--------------------------------------|----------------------|----------------|---|---|-----|------|

**NTC Thermistor Part**

|             |                 |                           |     |      |      |    |
|-------------|-----------------|---------------------------|-----|------|------|----|
| Resistance  | R <sub>th</sub> | T <sub>C</sub> = 25°C     | 9.5 | 10.0 | 10.5 | kΩ |
| B Constant* | B(25/100)       | Resistance at 25°C, 100°C | —   | 3450 | —    | K  |

\*Thermistor resistance R<sub>X</sub> at arbitrary temperature T<sub>X</sub>(K) can be calculated with the B constant formula

$$R_X = R_{25} \cdot \exp\left[B(25/100) \cdot \left(\frac{1}{T_X} - \frac{1}{T_{25}}\right)\right]$$


where R<sub>25</sub> is the resistance at T<sub>C</sub> = 25°C, T<sub>25</sub> = 298K.

**CP30TD1-12A**

**DIP-CIB**

**3Ø Converter + 3Ø Inverter + Brake**

**30 Amperes/600 Volts**

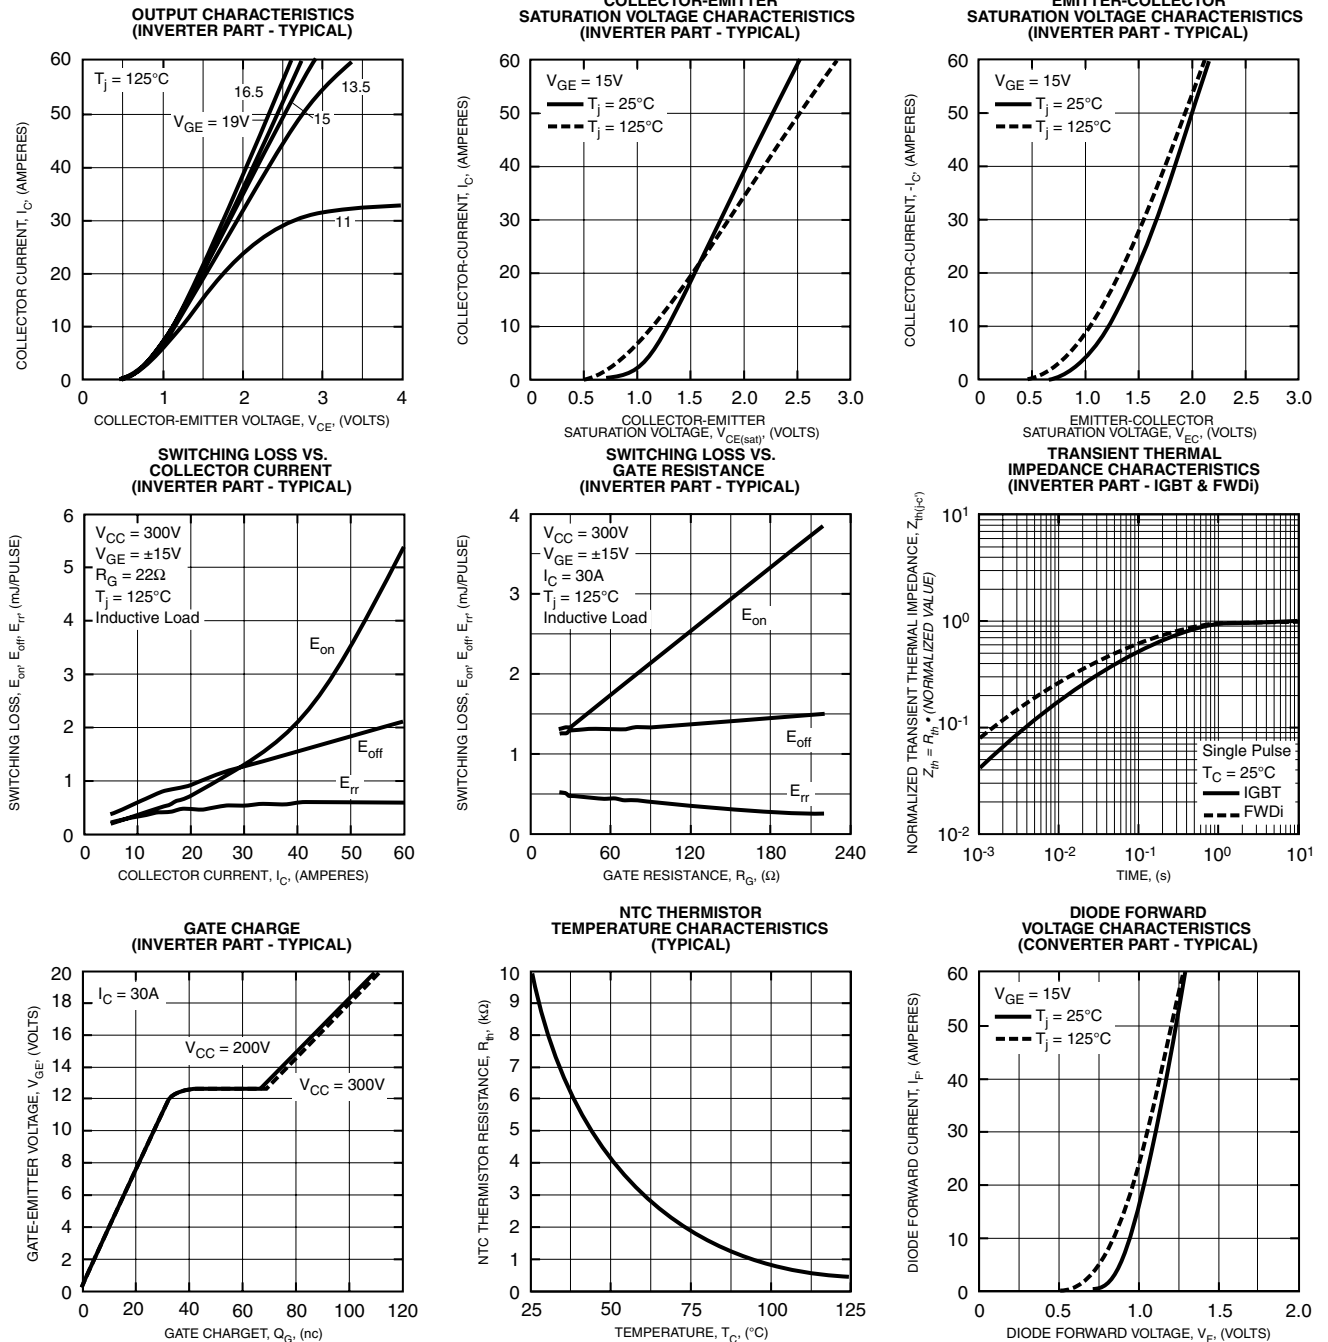

**CP30TD1-12A**

**DIP-CIB**

**3Ø Converter + 3Ø Inverter + Brake**

**30 Amperes/600 Volts**

