


Specification Sheet

Part Number: T18MR0C2

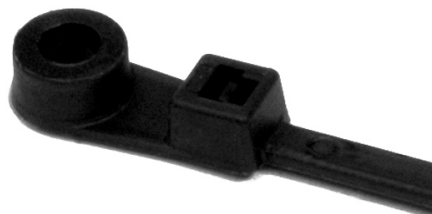

Screw-Mount Cable Tie, 4.3" Long, #4 Screw, .79" Max Bundle Dia, 18lb, PA66, Black, 100/pkg

Article Number	113-00022
Type	T18MR
Color	Black (BK)
Features & Benefits	<ul style="list-style-type: none">•Screw mount style creates low insertion and high extraction force.•Choose from several tensile strengths and lengths to accommodate a range of applications.
Quantity Per	bag
Product Description	One-piece Screw Mount Cable Ties fasten with a screw or bolt to provide secure routing of cable bundles. Multiple configurations are available to cover a range of bundle sizes and tensile strengths.
Short Description	Screw-Mount Cable Tie, 4.3" Long, #4 Screw, .79" Max Bundle Dia, 18lb, PA66, Black, 100/pkg

Global Part Name

T18MR-PA66HS-BK

Minimum Tensile Strength (Imperial)

18.0

Minimum Tensile Strength (Metric)

80

Length L (Imperial)

4.3

Length L (Metric)

110.0

Fixation Method

Fixing hole

Identification Plate Position

none

Releasable Closure

No

Tie Closure

plastic pawl

Variant

Inside Serrated

Width W (Imperial)

0.1

Width W (Metric)

2.5

Bundle Diameter Min (Imperial)

0.06

Bundle Diameter Min (Metric)

1.5

Bundle Diameter Max (Imperial)

0.8

Bundle Diameter Max (Metric)

20.0

Thickness T (Imperial)

0.039

Thickness T (Metric)	1.0
Height H (Imperial)	.17
Height H (Metric)	4.20
Mounting Hole Diameter D (Imperial)	0.12
Mounting Hole Diameter D (Metric)	3.1 mm
Mounting Hole Diameter D Max (Metric)	3.1
Material	Polyamide 6.6 heat stabilized (PA66HS)
Material Shortcut	PA66HS
Flammability	UL 94 V2
Operating Temperature (Metric)	-40°F to +221°F (-40°C to +105°C)
ROHS Complaint	Yes
Certification/Specification WEB	UL
UL Recognized (US)	Yes
UL Recognized (US and Canada)	Yes
Package Quantity(Imperial)	100

Package Quantity (Metric)

100

Customs Number

3926909987