


DB25 PIN-OUT VIEW FOR DB25

DB25 AND 297 WIRING CHART				
JACK (CHANNEL)	CABLE (COLOR)	TIP (RED)	RING (BLACK)	SLEEVE (BARE)
1	BROWN	24	12	25
2	RED	10	23	11
3	ORANGE	21	9	22
4	YELLOW	7	20	8
5	GREEN	18	6	19
6	BLUE	4	17	5
7	PURPLE	15	3	16
8	GRAY	1	14	2

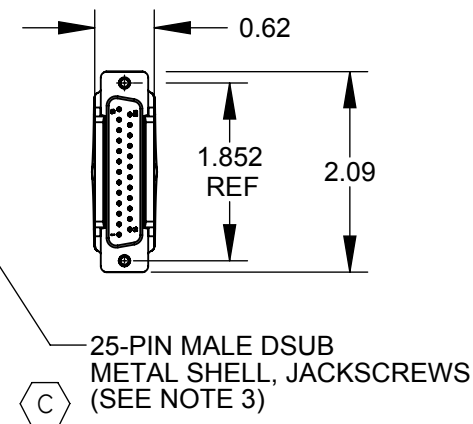

PART NO	CABLE LENGTH "X"
DB25M02TRS	2.00 FT +/- 1.50 IN
DB25M10TRS	10.00 FT +/- 1.50 IN

NOTES:

- BREAKOUT CABLE LENGTH: 18.00 +/- 0.75 INCHES.
- THE PRODUCT COMES COILED AND PACKAGED IN A BAG.
- JACKSCREWS ARE SHIPPED UNASSEMBLED. CABLE COMES WITH BOTH #4-40 THREAD (2) AND #M3 THREAD (2) JACKSCREWS.
- MATERIALS:
 LITTEL PLUG:
 SLEEVE, TIP AND BODY - COPPER ALLOY, NICKEL PLATED
 TERMINALS - SPECIAL COPPER ALLOY
 HANDLE - COPPER ALLOY, NICKEL PLATED
 DSUB - COPPER ALLOY, NICKEL PLATED WITH GOLD PINS
 CABLE - COPPER, THERMOPLASTIC
 JACKSCREWS - STAINLESS STEEL
- THIS PRODUCT IS RoHS COMPLIANT.

CUSTOMER DRAWING

REV	ECO NUMBER	DATE	BY	APVD
D	26795	7-8-11	TO	TJK
C	26637	10/4/10	RS	TJK
B	25926	8/14/08	JGK	TJK
A	25716	10/03/07	JGK	TJK

UNLESS OTHERWISE SPECIFIED

1. ALL DIMENSIONS IN INCHES
 - TWO PLACE DECIMALS ±0.02
 - THREE PLACE DECIMALS ±0.005

DO NOT SCALE DRAWING

THIS DRAWING DESCRIBES A DESIGN CONSIDERED PROPRIETARY IN NATURE, DEVELOPED AND MANUFACTURED BY SWITCHCRAFT INC. AND IS RELEASED ON A CONFIDENTIAL BASIS FOR IDENTIFICATION PURPOSES ONLY.

SIZE	WIDTH	MULT	LBS/M	TEMPER
FINISH SPEC No.		MATERIAL SPEC No.		
FIRST USED ON		SCALE 1:2		
DATE DRAWN	BY	CHKD	APVD	
9/12/06	JGK	RS	TJK	
NAME		PART No.		
DB25M TO 8 TRS PLUGS, RoHS		DB25M__TRS		

SHEET 1 OF 1

REV D