

Customer Information Sheet

DRAWING No.: D01-992XXXX

SHEET 2 OF 2


IF IN DOUBT - ASK

(C)

NOT TO SCALE

THIRD ANGLE PROJECTION

ALL DIMENSIONS IN mm

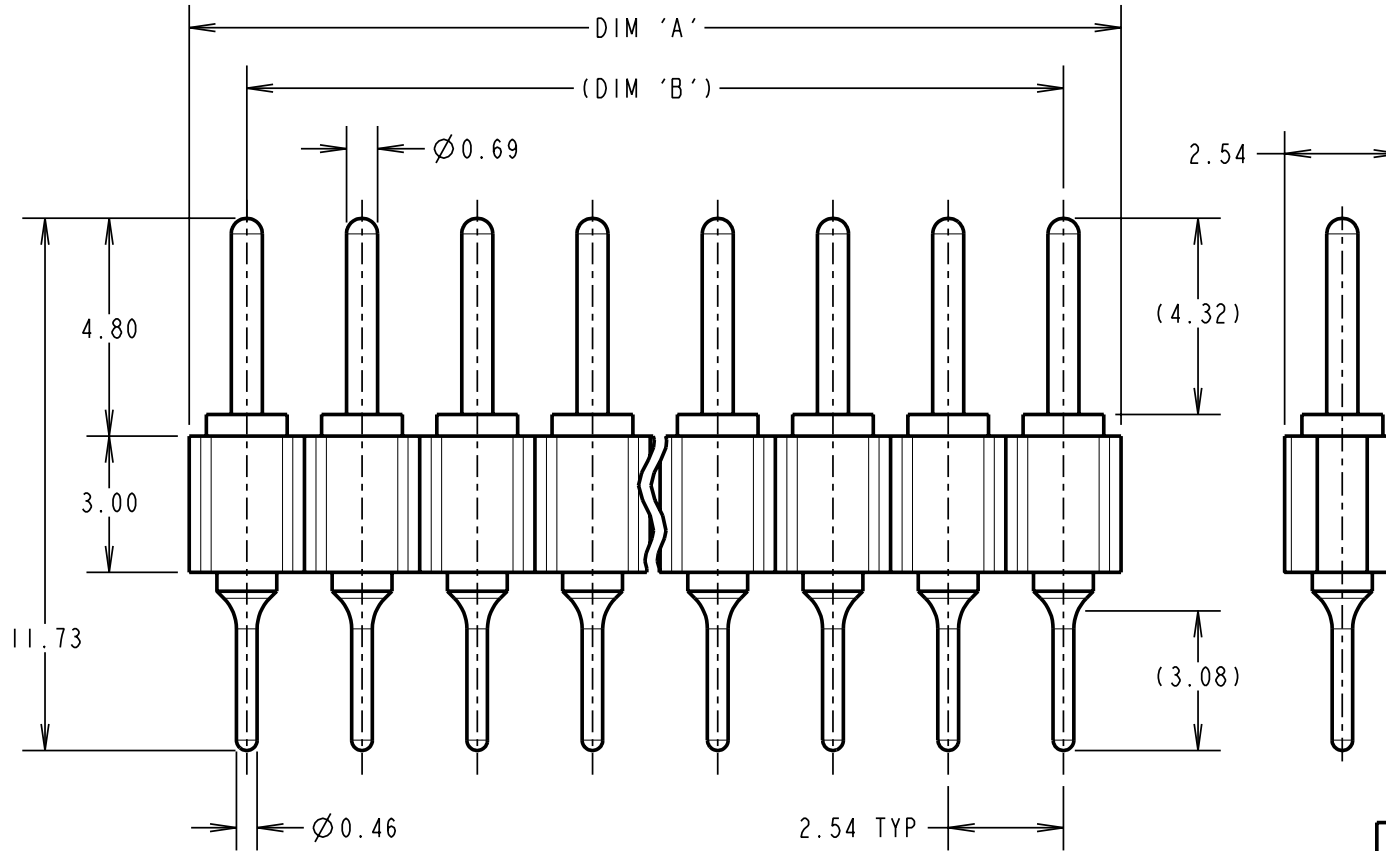

SPECIFICATION:
MATERIAL:
MOULDING
 01 = 30% G.F. POLYESTER UL94V-0, BLACK
 46 = POLYAMIDE 46 UL94V-0, BLACK
CONTACT = BRASS
FINISH:
CONTACT = 3.5-5.0µ 100% TIN OVER 2µ NICKEL
ELECTRICAL:
CURRENT RATING AT 25°C = 1.5A
CURRENT RATING AT 85°C = 0.25A
CONTACT RESISTANCE:
INITIAL = 15 mΩ MAX
AFTER CONDITIONING = 23 mΩ MAX
INSULATION RESISTANCE:
INITIAL = 1,000 MΩ MIN
AFTER CONDITIONING = 100 MΩ MIN
MECHANICAL:
DURABILITY = 1,000 OPERATIONS
ENVIRONMENTAL:
TEMPERATURE RANGE = -55°C TO +125°C
PACKING:
BAG
FOR COMPLETE SPECIFICATION, SEE COMPONENT SPECIFICATION C004XX (LATEST ISSUE)

PART No.	No. OF CONTACTS	DIM 'A'	DIM 'B'
D01-99220XX	20	51.10-50.70	(48.26)
D01-99232XX	32	81.10-81.60	(78.74)

NOTES:
 1. RECOMMENDED PCB HOLE SIZE = $\varnothing 0.80\text{mm}$ MIN.

ORDER CODE:
D01-992XXXX
 No. OF CONTACTS
 FINISH

RA	9	14.01.09	10257
NAME	ISS.	DATE	C/NOTE
APPROVED:		R. ADDE	
CHECKED:		M.G. PLESTED	
DRAWN:		D. FAIRS	
CUSTOMER REF.:			
ASSEMBLY DRG:			

HARWIN

HARWIN USA
 TEL: 603 893 5376
 FAX: 603 893 5396
 mis@harwin.com

HARWIN Europe (UK)
 TEL: 023 9231 4545
 FAX: 023 9231 4590
 mis@harwin.co.uk

HARWIN Asia
 TEL: +65 6 779 4909
 FAX: +65 6 779 3868
 mis@harwin.com.sg

THIS DRAWING AND ANY INFORMATION OR DESCRIPTIVE MATTER SET OUT HEREON ARE CONFIDENTIAL AND COPYRIGHT PROPERTY OF THE HARWIN GROUP AND MUST NOT BE DISCLOSED, LOANED, COPIED OR USED FOR MANUFACTURING, TENDERING OR FOR ANY OTHER PURPOSE WITHOUT THEIR WRITTEN PERMISSION.

TOLERANCES
 X. = $\pm 1\text{mm}$
 X.X = $\pm 0.25\text{mm}$
 X.XX = $\pm 0.10\text{mm}$
 X.XXX = $\pm 0.01\text{mm}$
 ANGLES = $\pm 5^\circ$
 UNLESS STATED

MATERIAL:
 SEE ABOVE
FINISH: SEE ABOVE
S/AREA: mm²

TITLE:
 I.C. SIL THROUGH HEADER
DRAWING NUMBER:
D01-992XXXX
 SHT 2 OF 2