


**ENERGIZER LA522**  
Advanced Lithium

**9V**





**Industry Standard Dimensions**

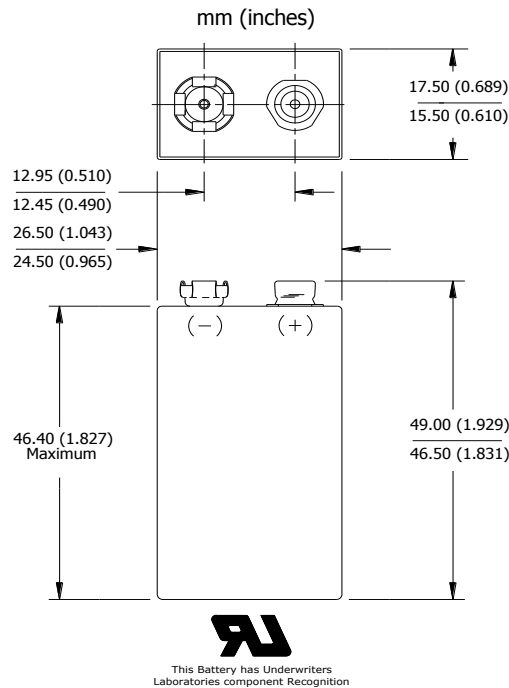




**Specifications**

- Classification:** Lithium 9V
- Chemical System:** Lithium-Manganese Dioxide (Li/MnO<sub>2</sub>)
- Designation:** ANSI-1604LC
- Nominal Voltage:** 9.0 volts
- Operating Temp:** -40°C to 60°C (-40°F to 140°F)
- Storage Temp:** -40°C to 60°C (-40°F to 140°F)
- Max Discharge :** 1000 mA continuous
- Safety Features:** Positive Temperature Coefficient Switch (PTC)  
Burst Proof Venting Holes
- Typical Weight:** 33.9 grams (1.2 oz.)
- Typical Volume:** 21.4 cubic centimeters (1.3 cubic inch)
- Jacket:** Plastic Label
- Terminal:** Miniature Snap
- Shelf Life:** 10 Years
- Typical Li Content:** 1.35 grams (0.048 oz.)
- UL/UN Listed:** MH47482

**Milliamp-Hours Performance (21°C)**

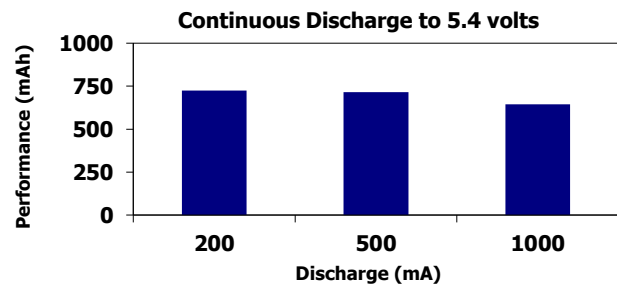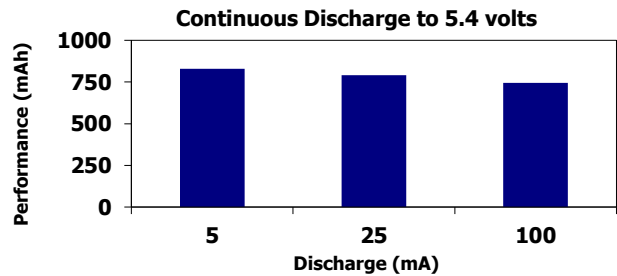

**Typical Discharge Performance (21°C)**

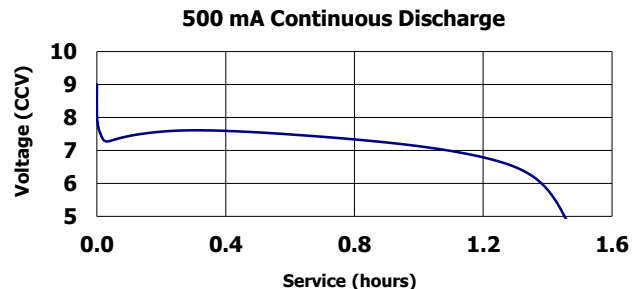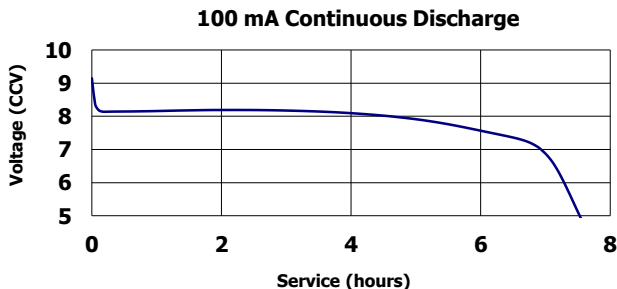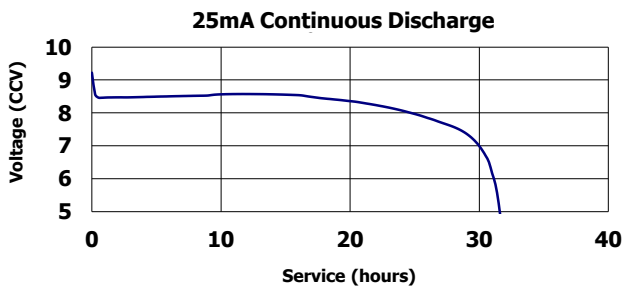

**Important Notice**

This datasheet contains typical information specific to products manufactured at the time of its publication.  
©Energizer Holdings, Inc. - Contents herein do not constitute a warranty.