

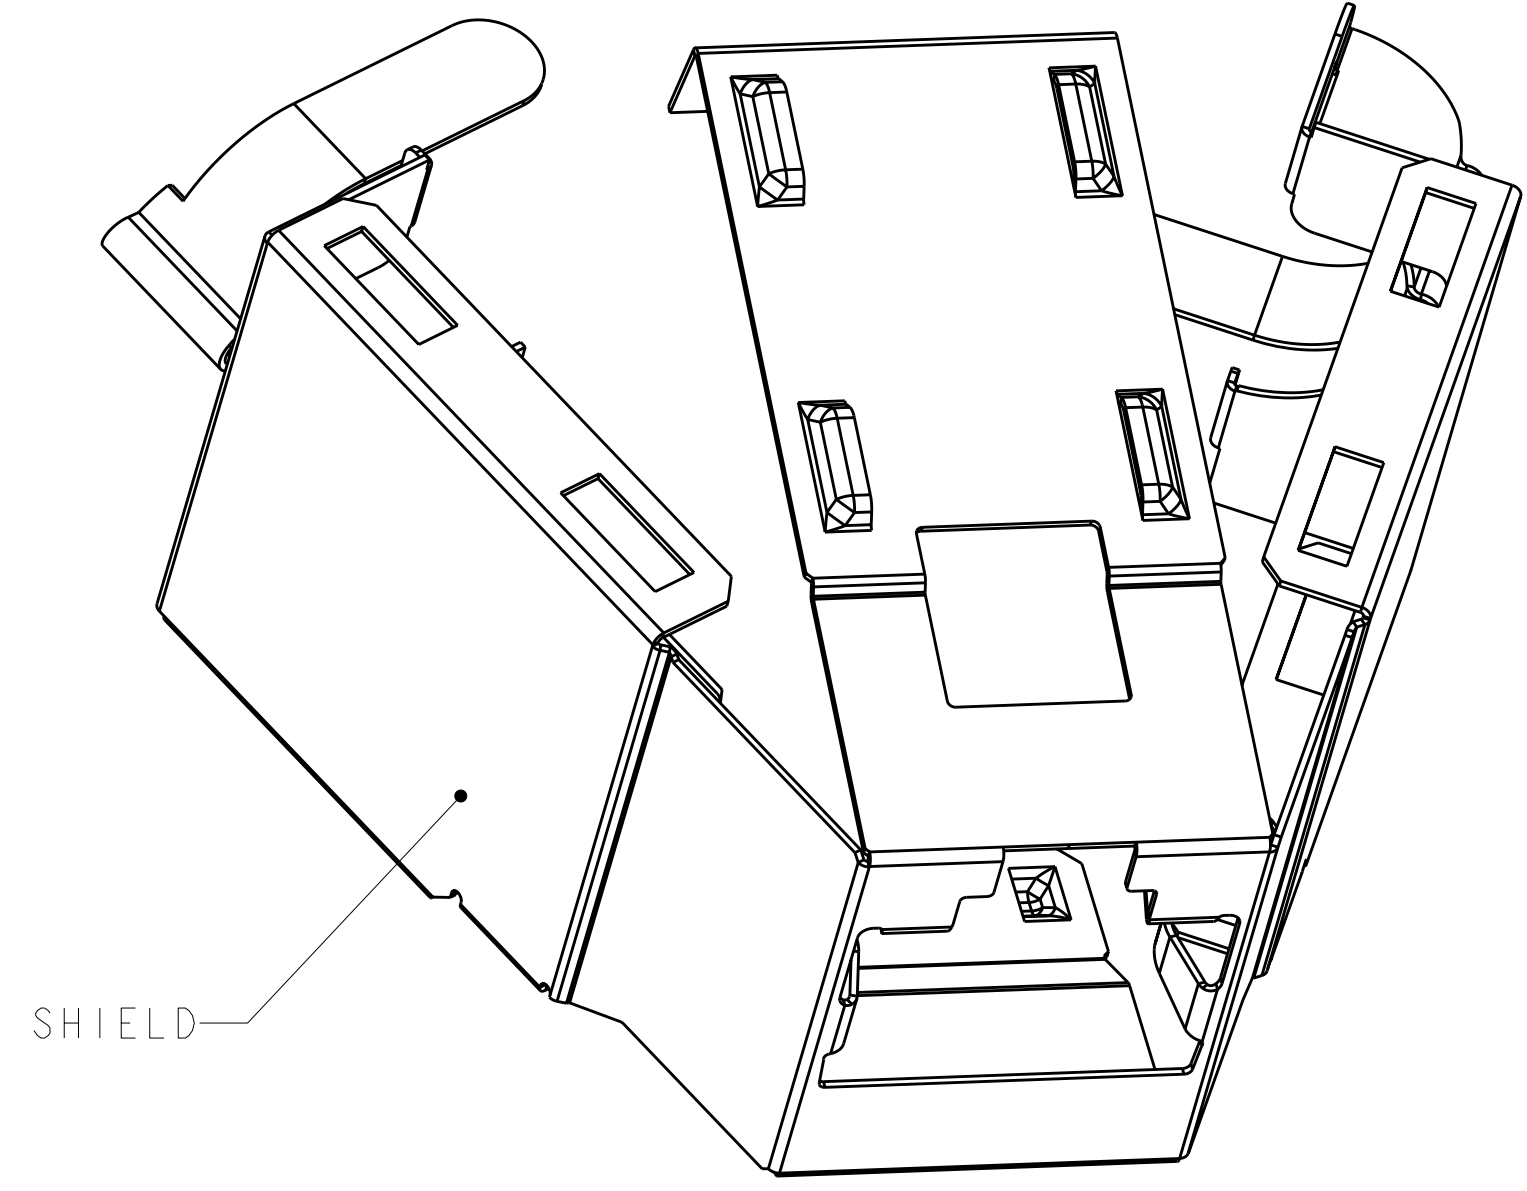
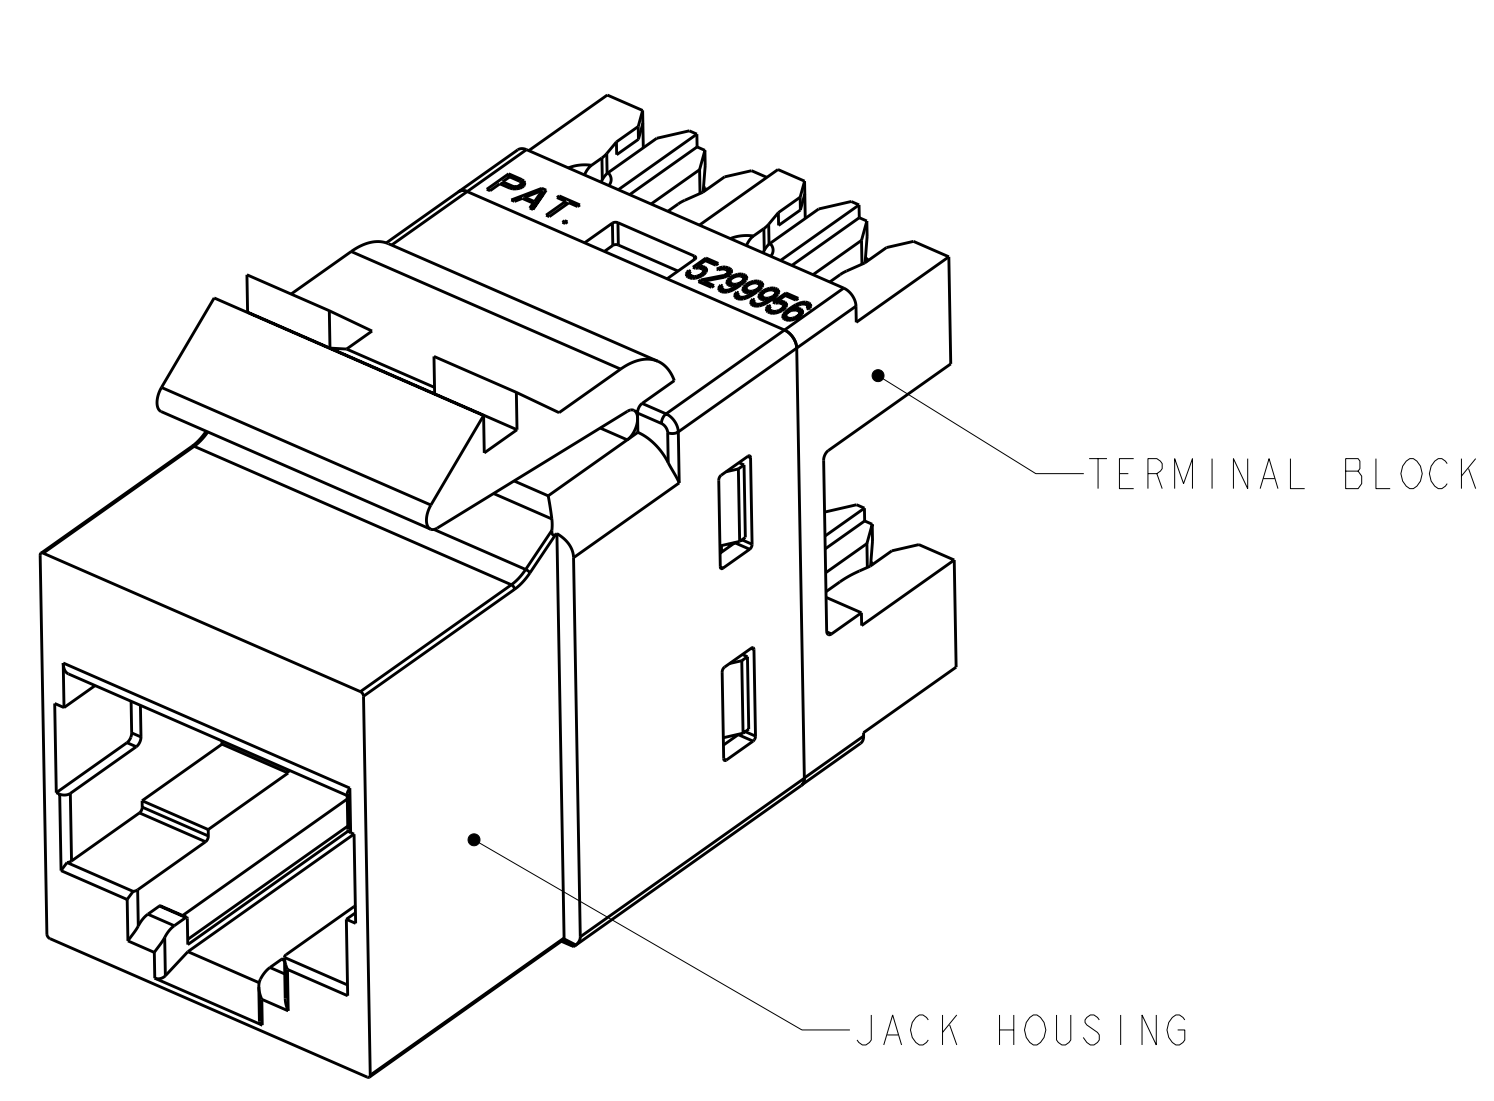
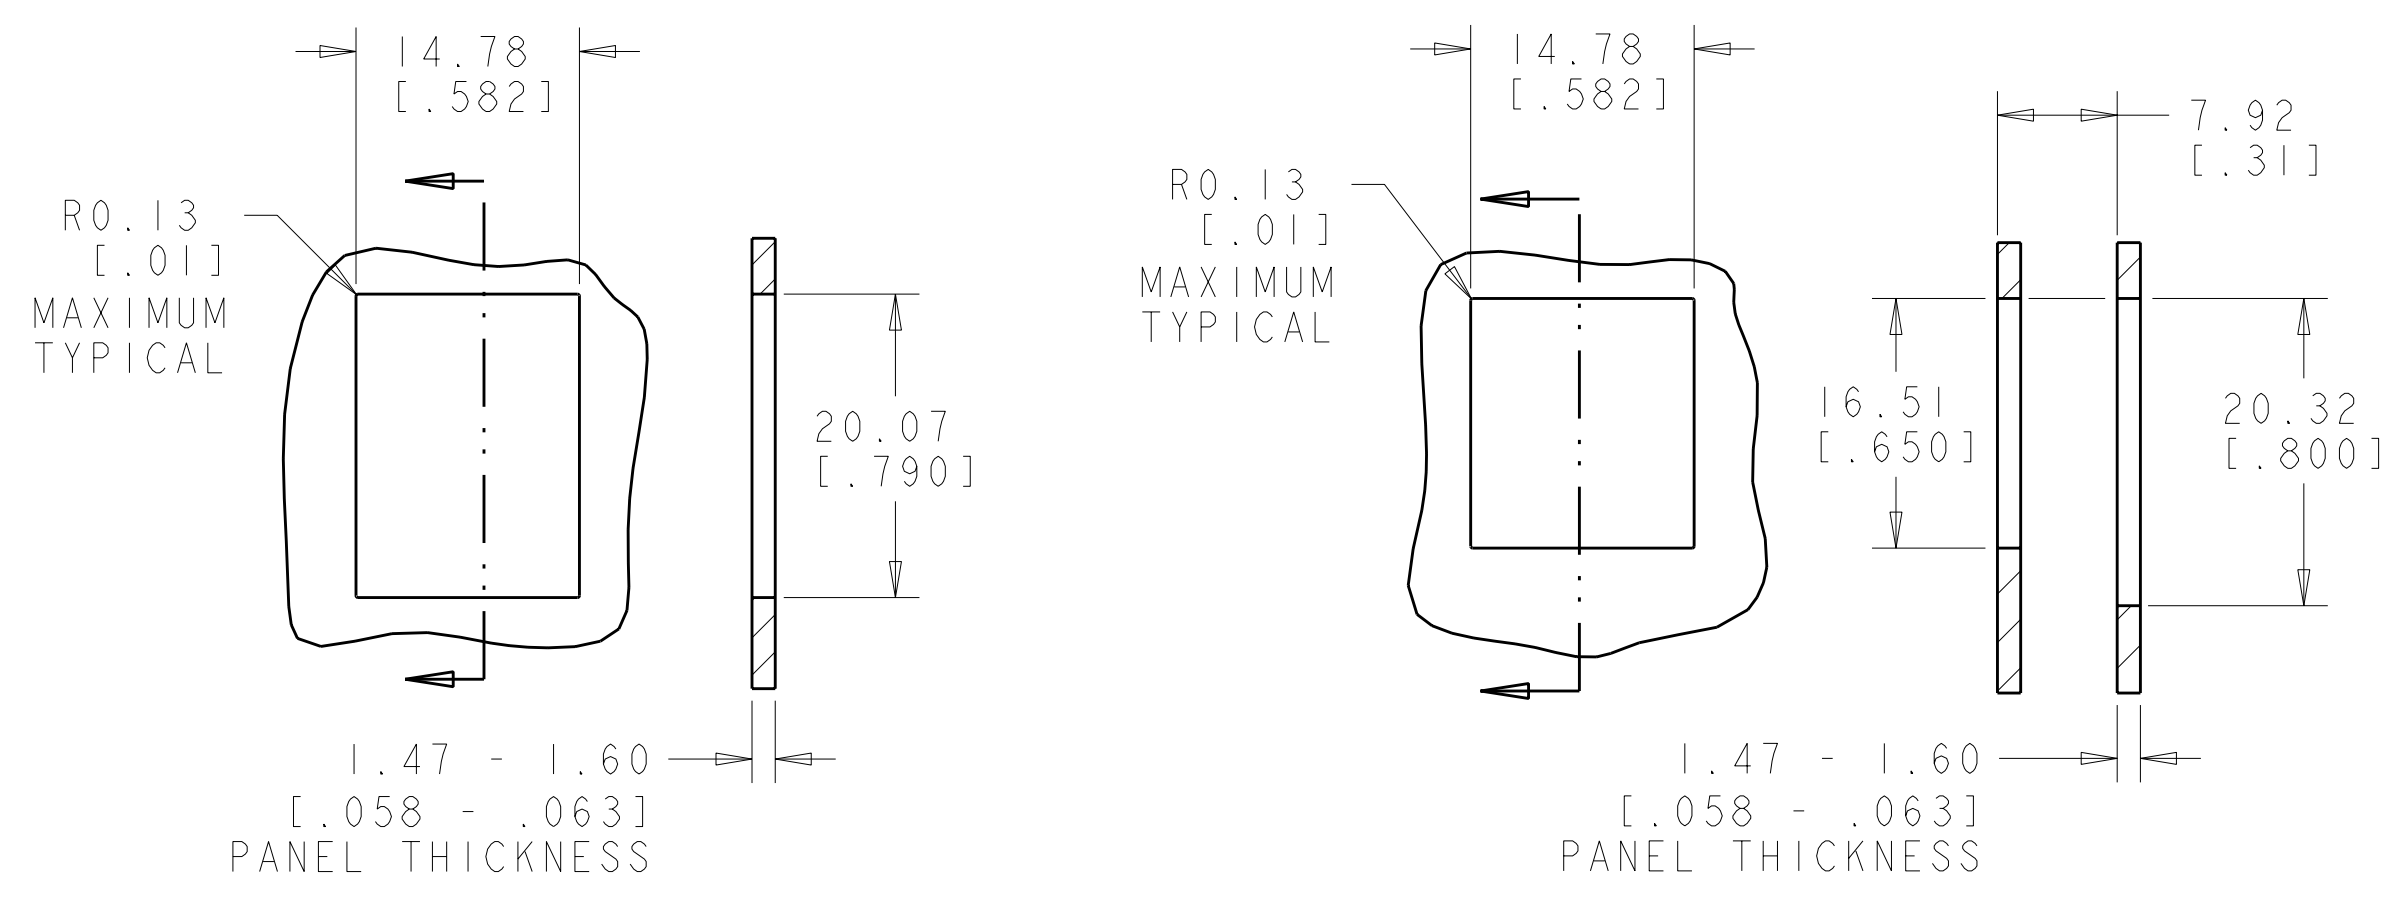
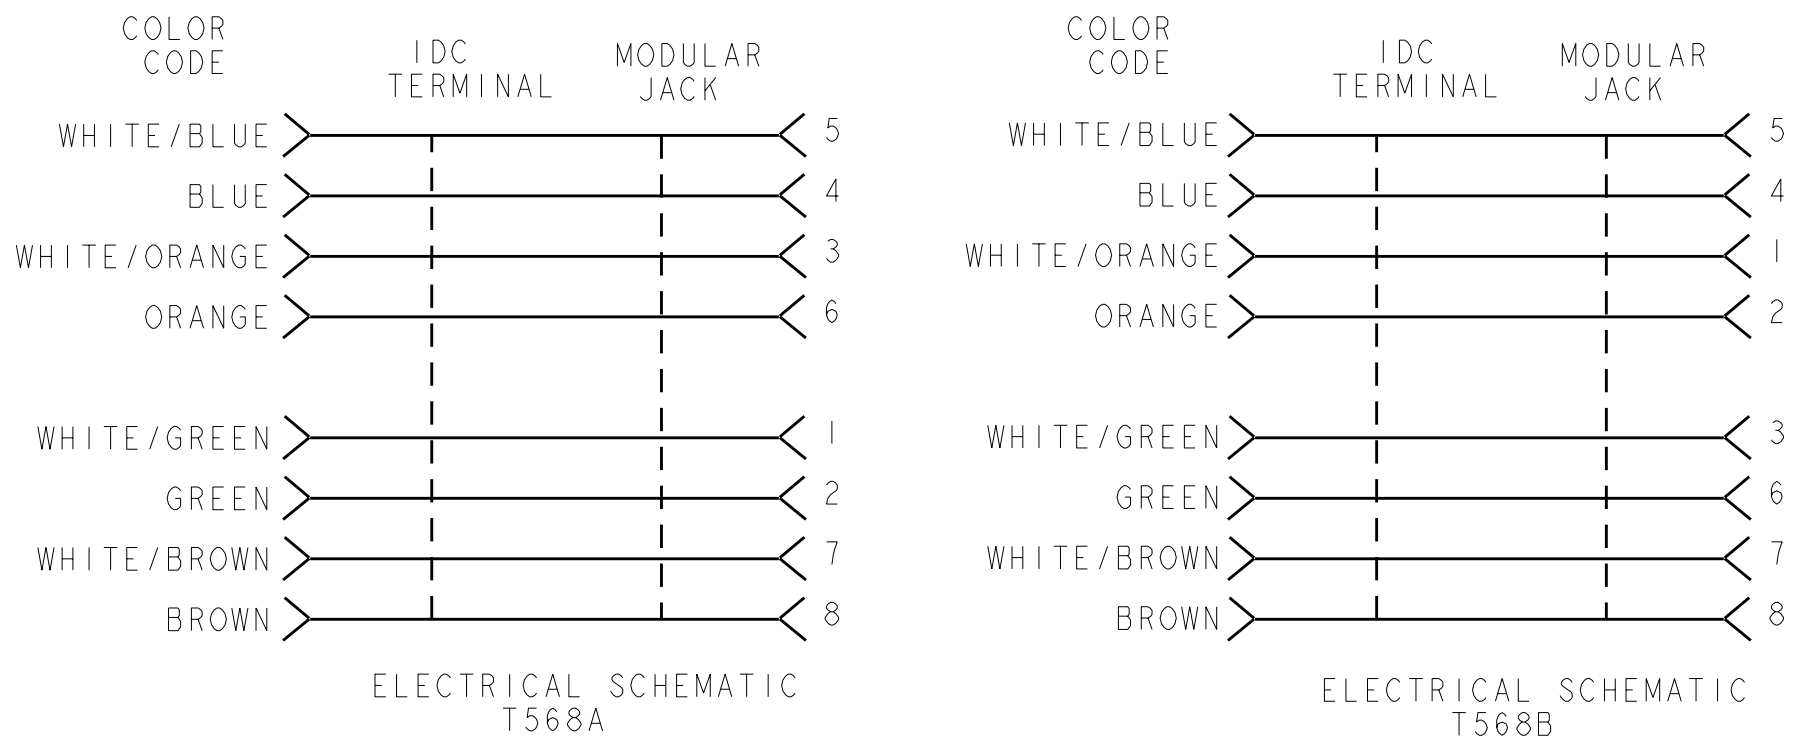
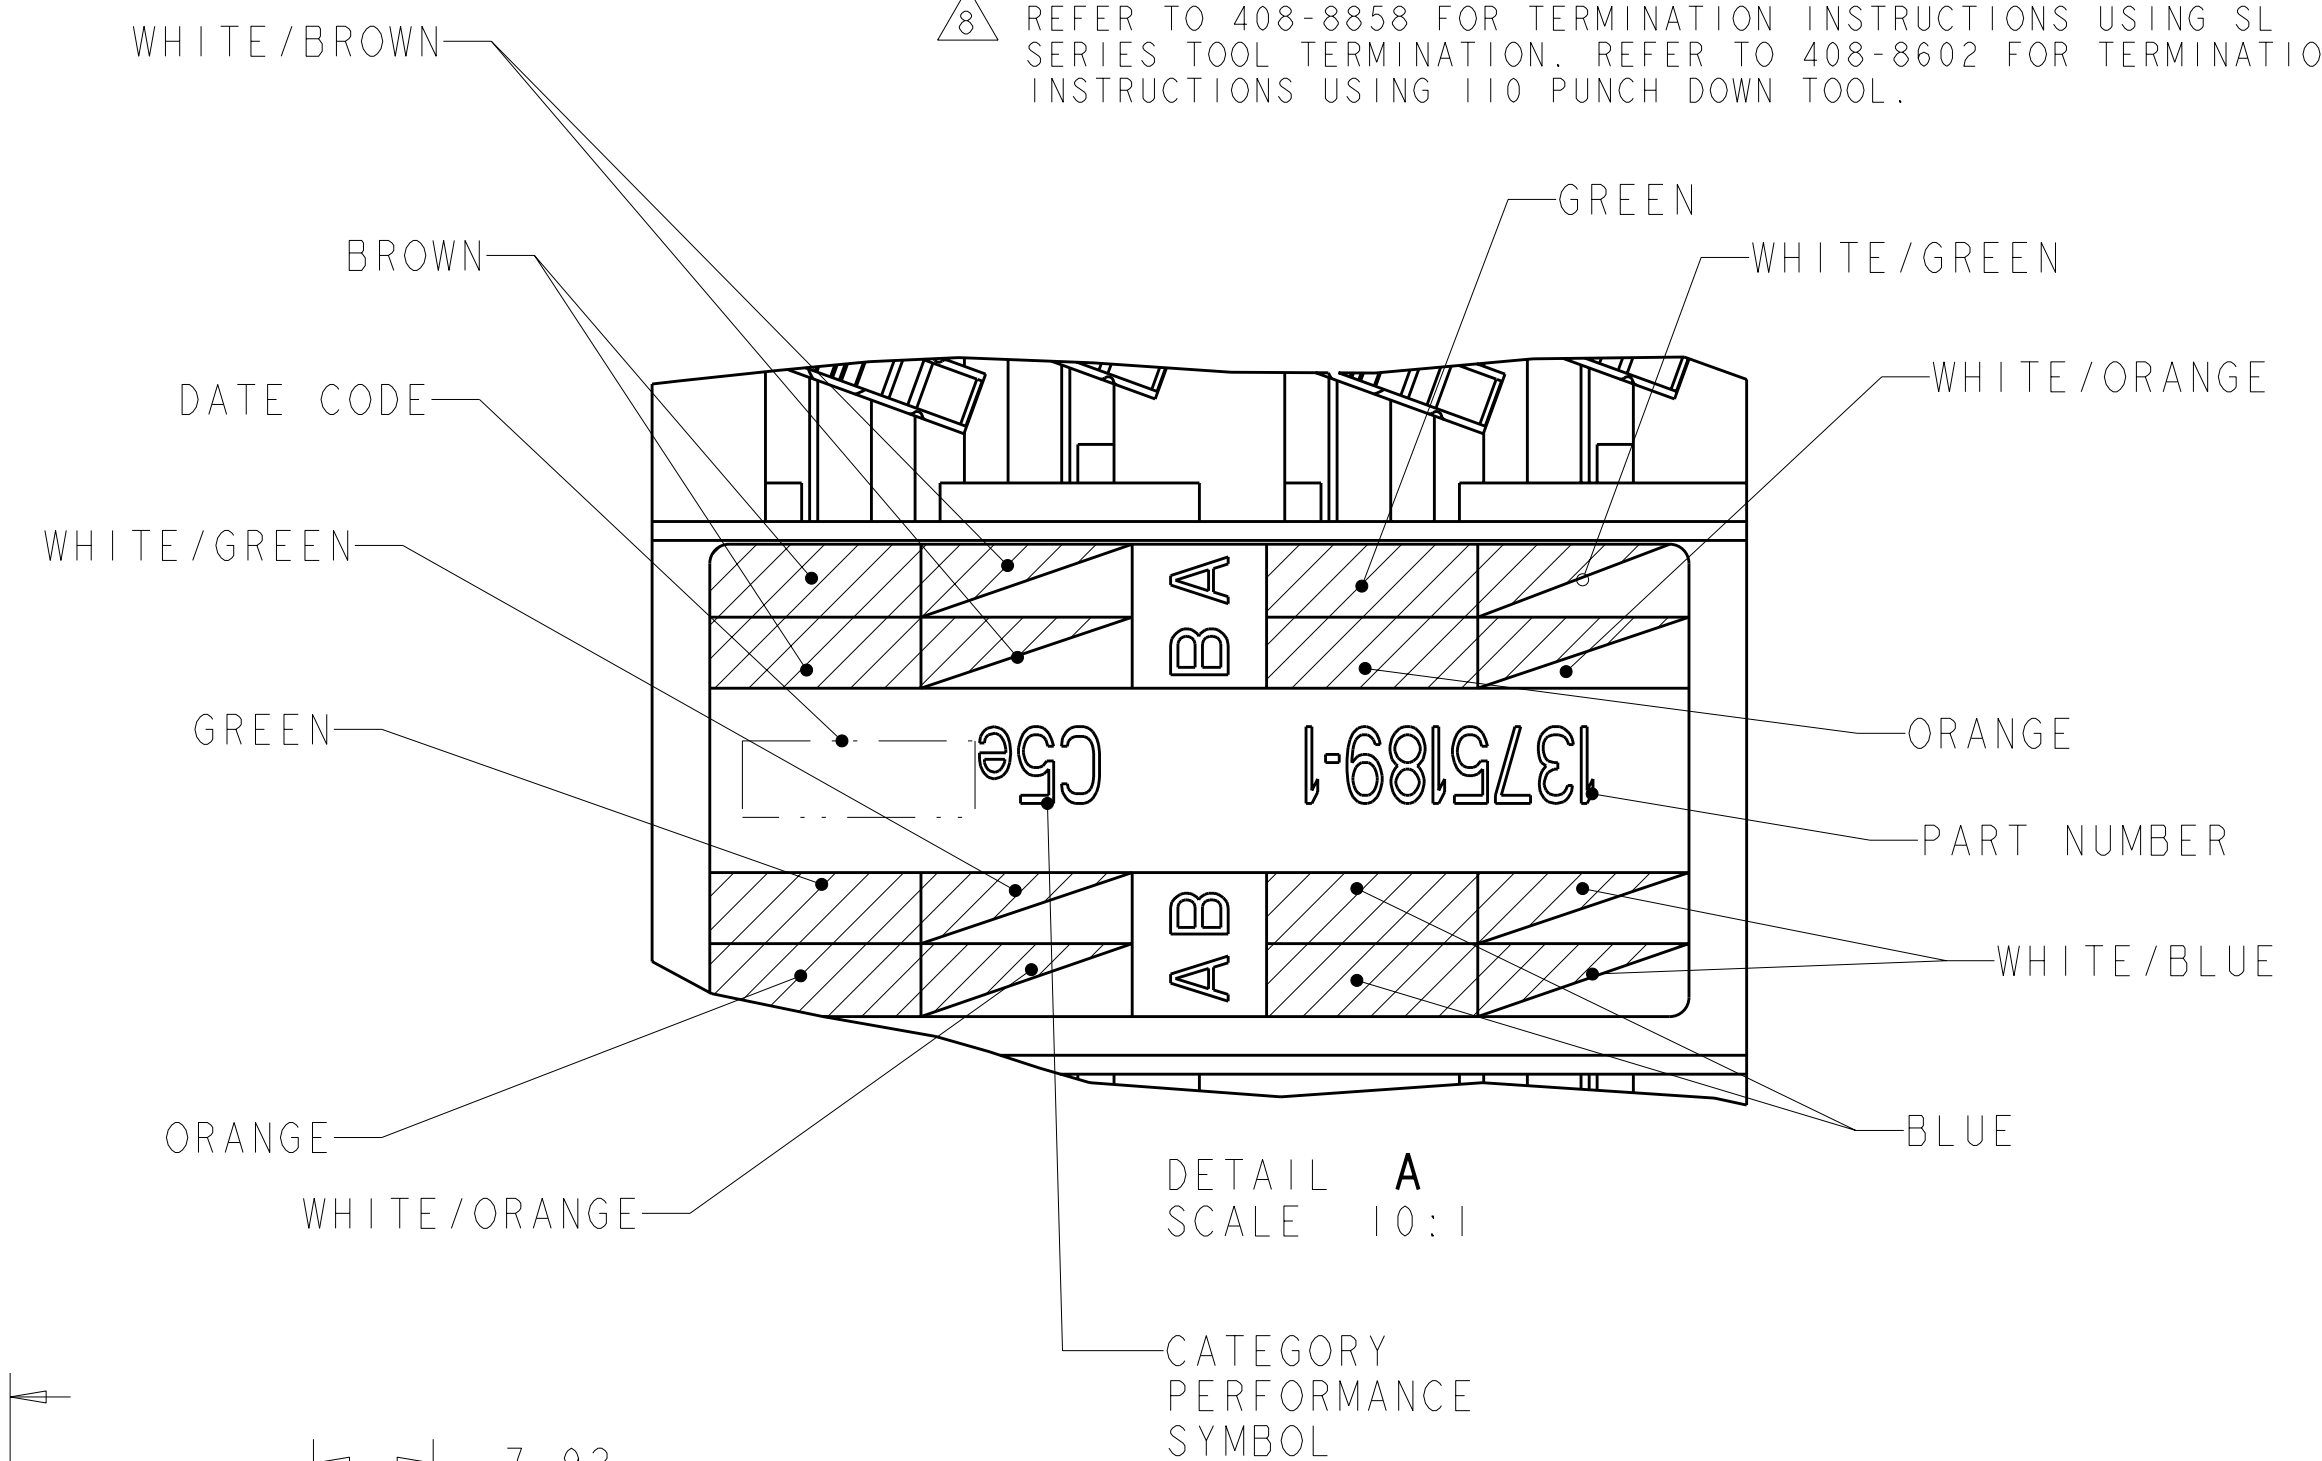


LOC	DIST	REV	DESCRIPTION	DATE	DWN	APVD
HM	00	H	REV: ECO-11-015895	06SEP2011	JB	SA

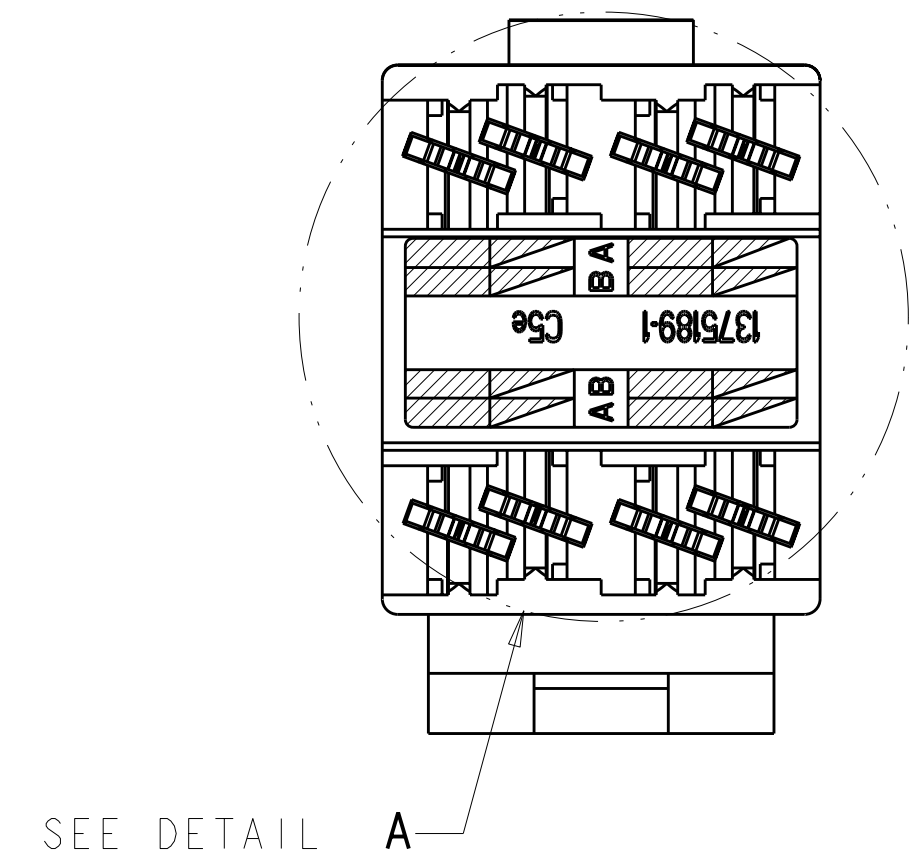

- 1. MATERIAL: JACK HOUSING - POLYCARBONATE, 94V-0 RATED.
 110 BLOCK - POLYCARBONATE.
 ARRAY TRAY - PBT POLYESTER.
 JACK CONTACTS ARRAY - BERYLLIUM COPPER, PLATED WITH
 1.27µm [.000050] MINIMUM THICK GOLD IN LOCALIZED
 AREA AND 3.81µm [.000150] MINIMUM THICK MATTE TIN IN
 BOARD INTERFACE AREA OVER 1.27µm [.000050] MINIMUM THICK
 NICKEL UNDERPLATE.
 SHIELD - COPPER ZINC ALLOY 260 PREPLATED
 WITH BRIGHT NICKEL.
 IDC TERMINALS - PHOSPHOROUS BRONZE, PLATED WITH
 3.81µm [.00015] MINIMUM THICK BRIGHT MATTE TIN OVER
 1.27µm [.00005] MINIMUM THICK NICKEL UNDERPLATE.
 SHIELD: COPPER ZINC ALLOY 260 PREPLATED
 WITH BRIGHT NICKEL.
- 2. SL 110 JACK WILL TERMINATE 22-24 AWG SOLID AND 24-26 AWG
 STRANDED CONDUCTORS, 1.27[.050] MAXIMUM INSULATION DIAMETER.
 JACK WILL ACCEPT CONDUCTORS UP TO 1.45 [.057] BUT REQUIRE
 THE USE OF A STRAIN RELIEF.
- 3. CAVITY CONFORMS TO FCC RULES AND REGULATIONS
 PART 68 SUBPART F REQUIREMENTS.
- 4. MOUNTING PANEL THICKNESS 1.47 - 1.60 [.058 - .063].
- 5. THESE TWO SUGGESTED CUTOUT OPENINGS ARE USED
 IN TANDEM WITH DUAL FRONT AND BACK CUTOUTS.
- 6. ONE MODULAR JACK ASSEMBLY AND ONE SHIELD
 PER POLYBAG.
- 7. SHIELD SHIPPED NOT ASSEMBLED.
- 8. REFER TO 408-8858 FOR TERMINATION INSTRUCTIONS USING SL
 SERIES TOOL TERMINATION. REFER TO 408-8602 FOR TERMINATION
 INSTRUCTIONS USING 110 PUNCH DOWN TOOL.

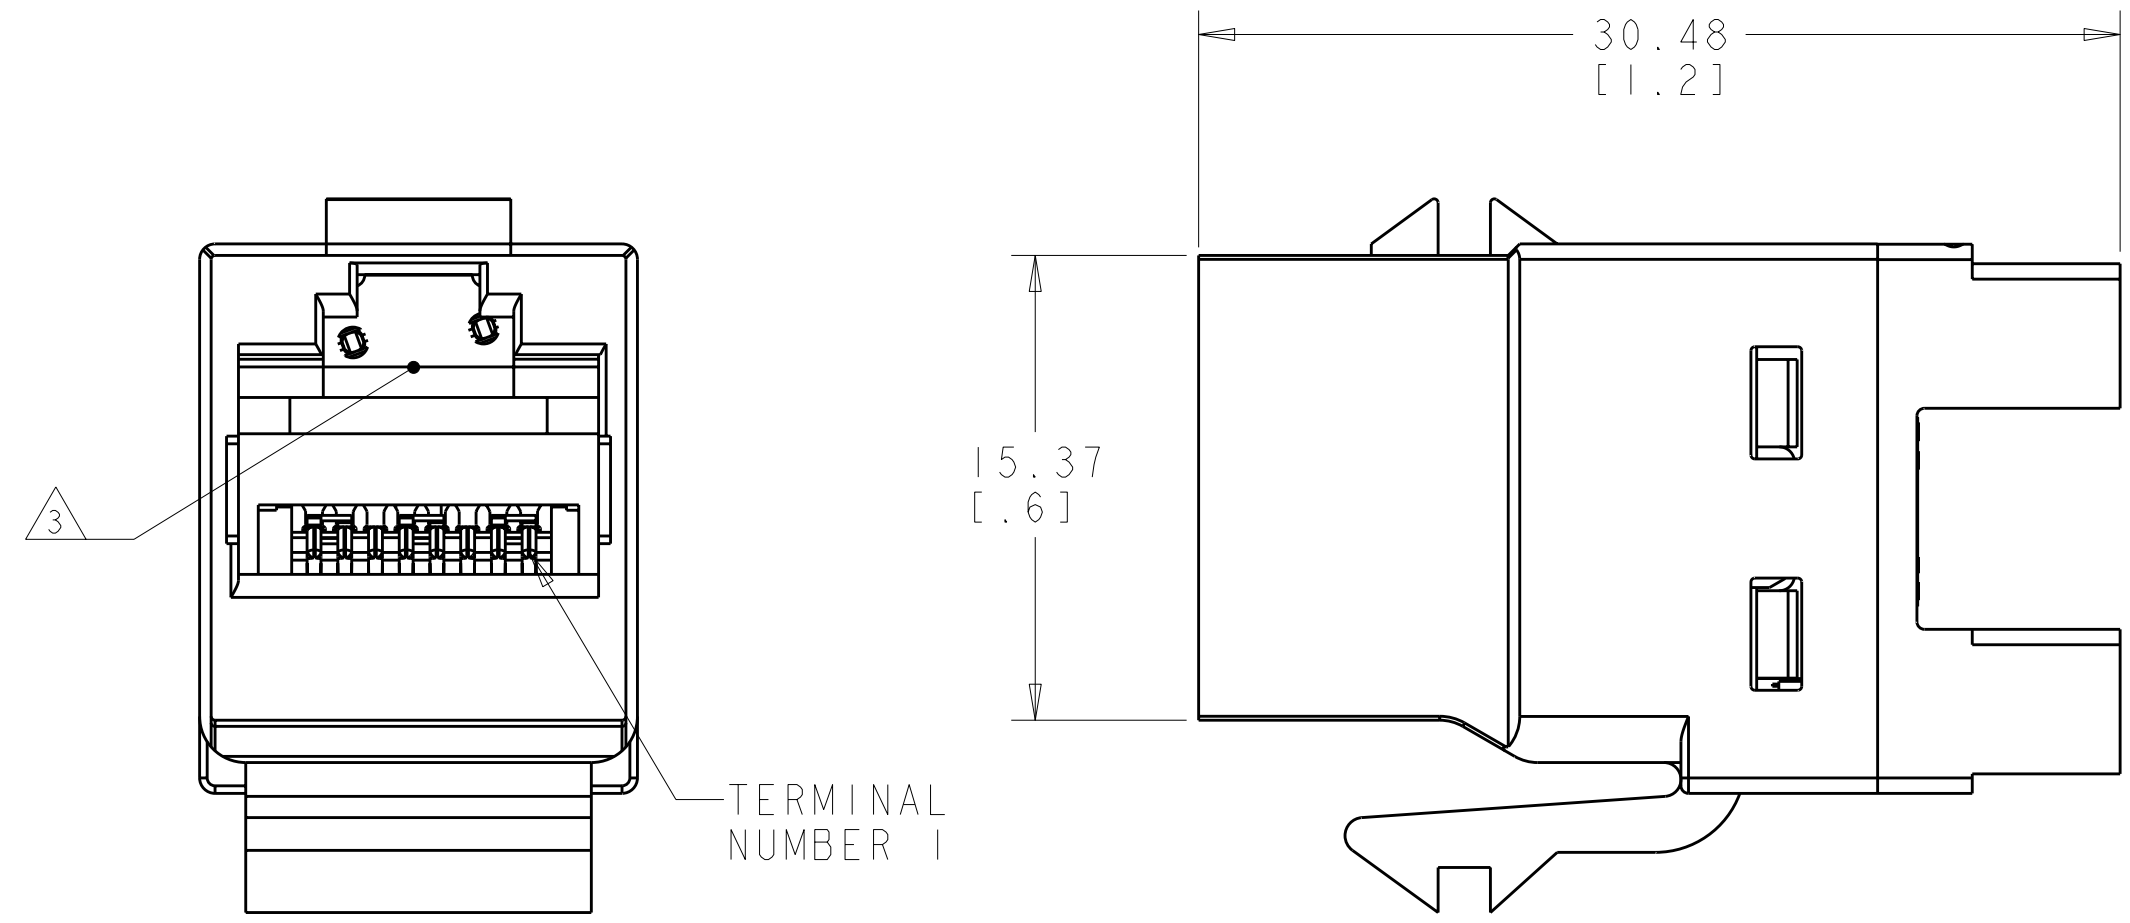

6	BLACK	1375189-1
PACKAGE	HOUSING COLOR	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: MM [Inches]	TOLERANCES UNLESS OTHERWISE SPECIFIED:	9 PLC ±	05NOV01	DWN T. PITTS
1 PLC ±	2 PLC ±	3 PLC ±	15NOV01	CHK L. SMITH
4 PLC ±	ANGLES ±	FINISH ±	15NOV01	APVD C. DOOLEY
MATERIAL:	FINISH:	WEIGHT:	APVD	NAME

PRODUCT SPEC 108-1990
 APPLICATION SPEC 108-1990-2

ASSEMBLY, SL 110 JACK, SHIELD, CATEGORY 5c

SIZE: CAGE CODE DRAWING NO. RESTRICTED TO
 A100779C=1375189

CUSTOMER DRAWING SCALE 4:1 SHEET 1 OF 1 REV H