

MODEL NUMBER
PWD-5526-04-NNN-79

NOTES:

1.0 ELECTRICAL SPECIFICATIONS:


- 1.1 FREQUENCY RANGE: 6.0 to 18.0 GHz
- 1.2 INSERTION LOSS: 1.5dB MAX.
- 1.3 AMPLITUDE BALANCE: 0.5dB
- 1.4 PHASE BALANCE: 20°
- 1.5 INPUT VSWR (AT J1): 1.75:1 MAX.
OUTPUT VSWR(AT J2-J5):
- 1.6 ISOLATION: 15dB MIN.
- 1.7 INPUT POWER: 30 WATTS MAX.

2.0 FINISHING


- 2.1 GREY OVER MIL-E-15090 TYPE II, CLASS 2
OVER MIL-C-5541 CLASS 3A
MEETS MIL-F-14072
MEETS MIL-E-5400

- 2.2 MARKING: MARK UNIT AS SHOWN
USING BLUE INK
(REF.: SLK-09015-82-01)

3.0 DIMENSIONS IN PARENTHESIS ARE
IN MILLIMETERS.

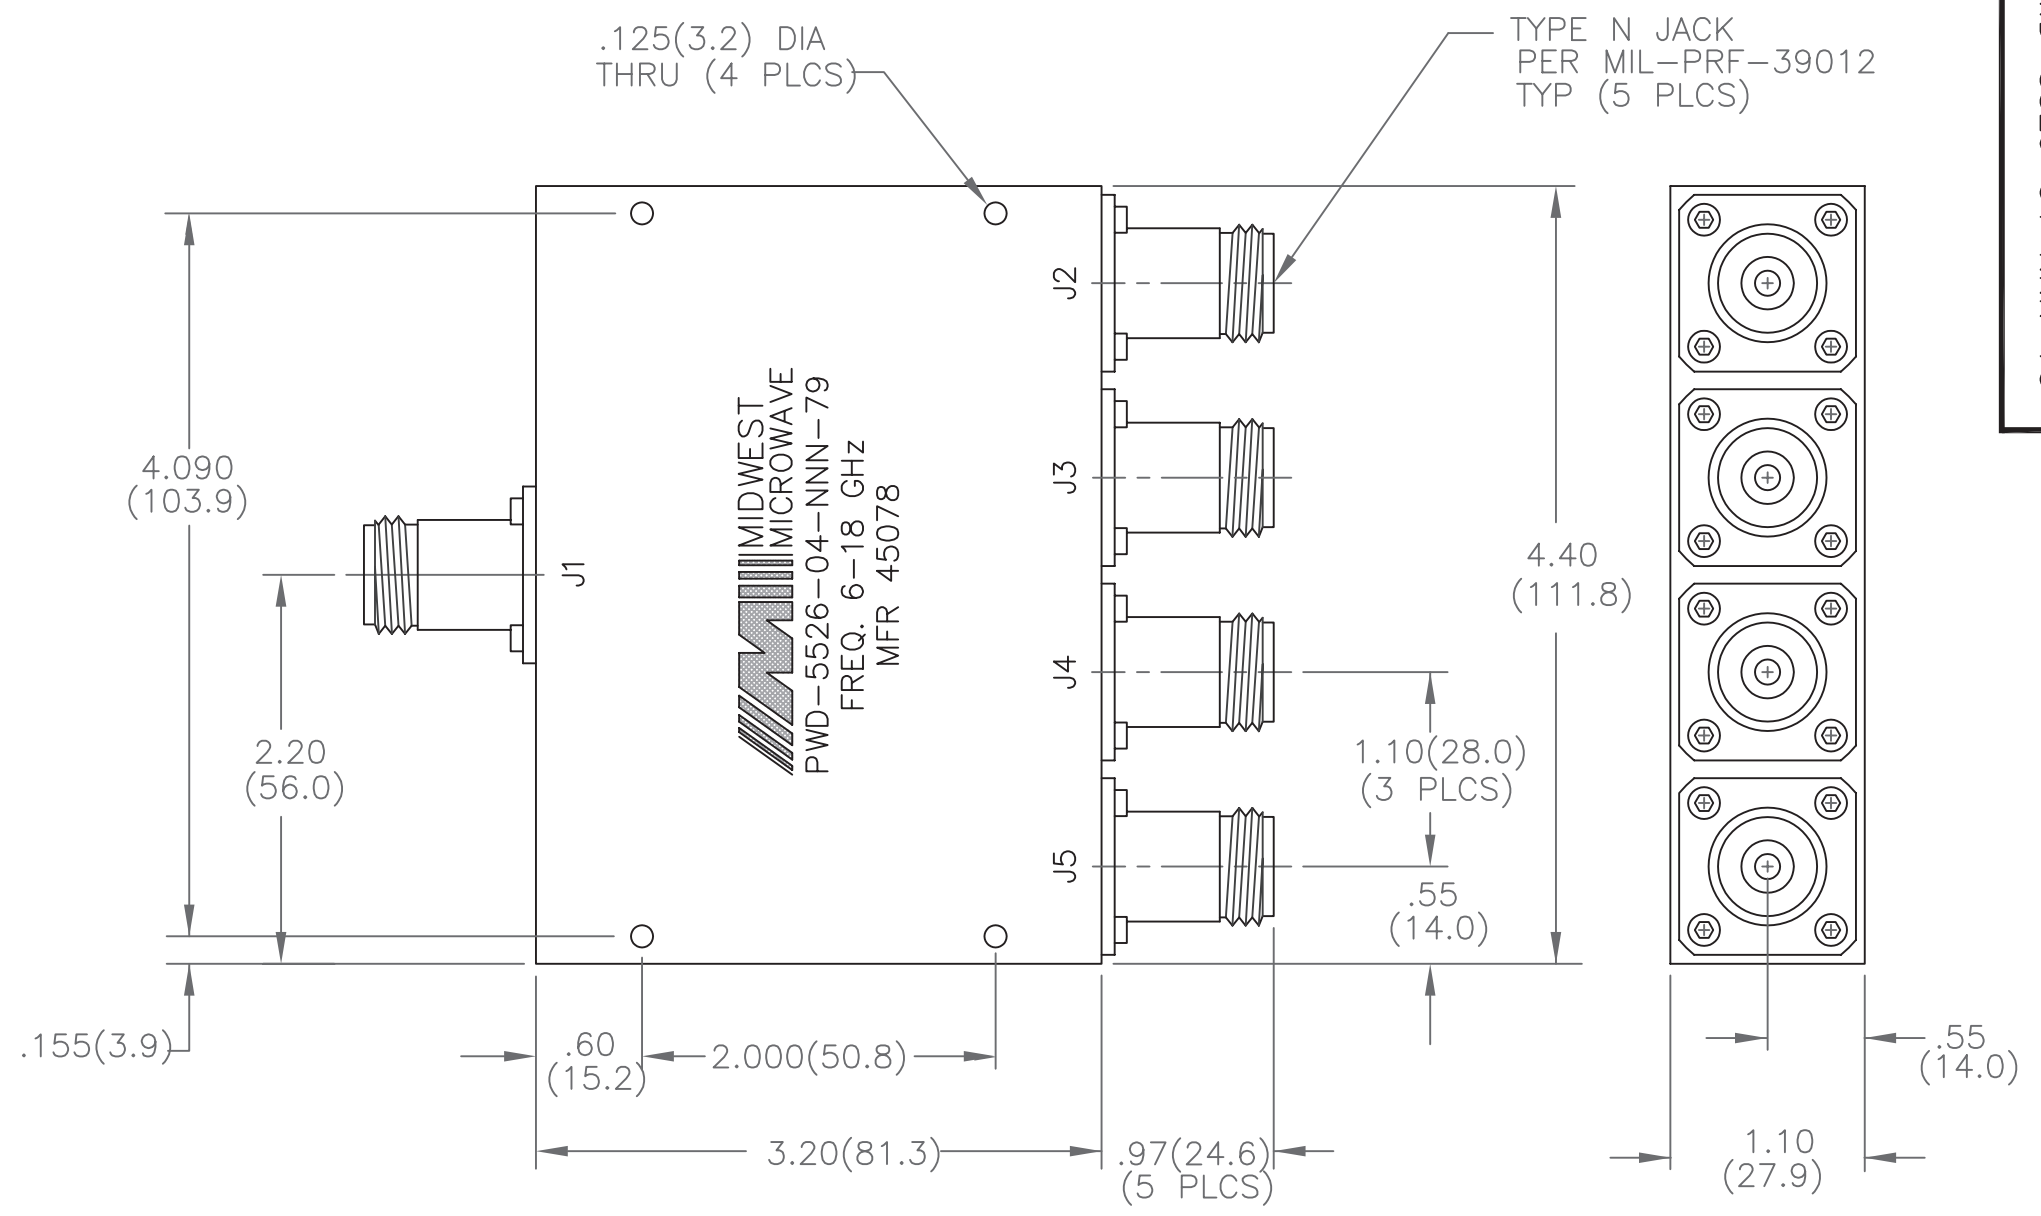

REV.	DESCRIPTION	DATE
-	RELEASED	1/13/94
A	ECN 17674	10/11/00
B	ECN 17678	10/12/00

NOTICE: The information contained in this drawing is proprietary and must not be used without the permission of Cinch Connectivity Solutions.		CAGE CODE 34078	MIDWEST MICROWAVE	
UNLESS OTHERWISE NOTED DIMENSIONS ARE IN INCHES AND TOLERANCES ARE: 3 PLACE DECIMALS ±.005 2 PLACE DECIMALS ±.02 FRACTIONS ±1/64 PARALLELITY: T.I.R. _____ FLATNESS: T.I.R. _____ CONCENTRICITY: T.I.R. _____ ANGLES AND PERPENDICULARITY: ±1°				TITLE POWER DIVIDER OUTLINE DRAWING
DRAWN/DATE A.BEATTY 12/15/93		ENG./DATE P.GOODMAN 1/11/94		DRAWING NUMBER PWD-5526-04-NNN-79-01
CHECKED/DATE		APPROVED/DATE		REV. B
SCALE: 2=1		SHEET 1 of 1		