

SIGN	DATE	DESCRIPTION	APPROVER
	2008.06.04	Rev B: Standard material changed from UL94V-2 to UL94V-0	Jimmy
<i>THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!</i>			

**Material**

- Insulator: Nylon 66
- Flammability: UL94V-0
- Color: Ivory
- Contacts: Brass
- Plating: 120u" Tin over 30u" Nickel

**Ratings**

- Current: 3A
- Voltage: 250V AC(r.m.s.)
- Contact Resistance: <math> < 20\Omega </math>
- Insulation Resistance: >1,000 $\Omega$
- Dielectric Withstanding Voltage: 1000V AC for one minute
- Operating Temperature: -55° - +105°

RoHS Compliant




OPTIONS - add to end of p/n

- G - Gold plating
- BK - Black color
- consult factory for other options
- OPTIONS may require MOQ


PART NUMBER:

**2600-XX-S**



Number of circuits  
02-20

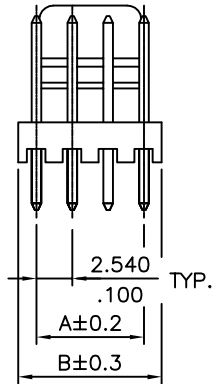

(02 through 05 circuits)

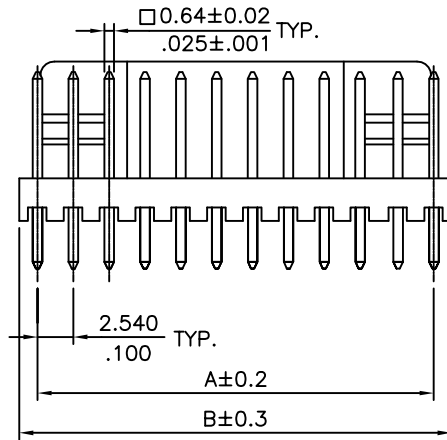

(06 through 20 circuits)

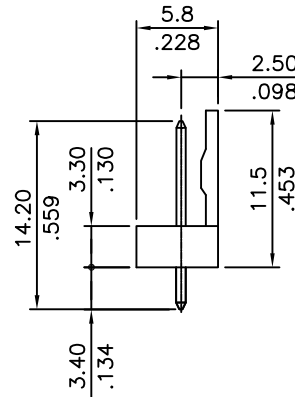

Recommended P.C. Board Layout

$A = 2.54 \times \text{No. of Spaces}$

$B = A + 2.54$

\* Available in 02 through 20 circuits



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ON-SHORE TECHNOLOGY, INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ON-SHORE TECHNOLOGY, INC.

TITLE		2600 Series - 2.54mm single row, vertical friction lock header			
PART NO.		2600-XX-S		DWG NO. 2600-XX-S.DWG	
APPROVED	CHECKED	DESIGNED	DRAWN	4050	
	Marvin 2001.10.03	Marvin 2001.10.03	Marvin 2001.10.03	Tolerance	
				X. ±0.30/.012	
				X.X ±0.20/.008	
				X.XX ±0.10/.004	
				X* ±1°	
SHEET: 01/01				REV.: B	