

Housing - HC-B 24-TFQ-H/O2STM40G - 1412450

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



HEAVYCON B24 sleeve housing, for double locking latch, height: 76 mm, with 2 x M40 thread, straight cable outlet

Product Features



Key commercial data

Packing unit	1 pc
Custom tariff number	85389099
Country of origin	Germany

Technical data

General

Note	For contact inserts HC-B24, BB46, BBB64, D64, DD108, M
Type	B24

Ambient conditions

Ambient temperature (operation)	-40 °C ... 125 °C
Degree of protection	IP65

Material data

Housing material	Aluminum die-cast
------------------	-------------------

Classifications

eCl@ss

eCl@ss 5.1	27143424
eCl@ss 6.0	27143424

Housing - HC-B 24-TFQ-H/O2STM40G - 1412450

Classifications

eCl@ss

eCl@ss 8.0	27440202
------------	----------

ETIM

ETIM 4.0	EC002498
ETIM 5.0	EC002498

Approvals

Approvals

Approvals

EAC

Ex Approvals


Approvals submitted

Approval details

EAC

Drawings

Dimensional drawing

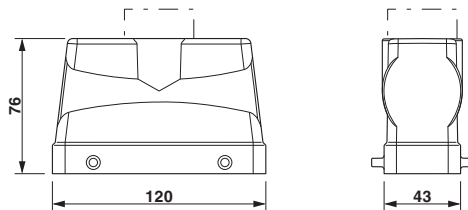

Dimensional drawing
