
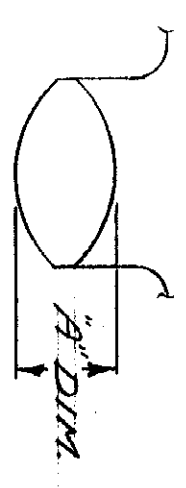


NUMBER  
69335

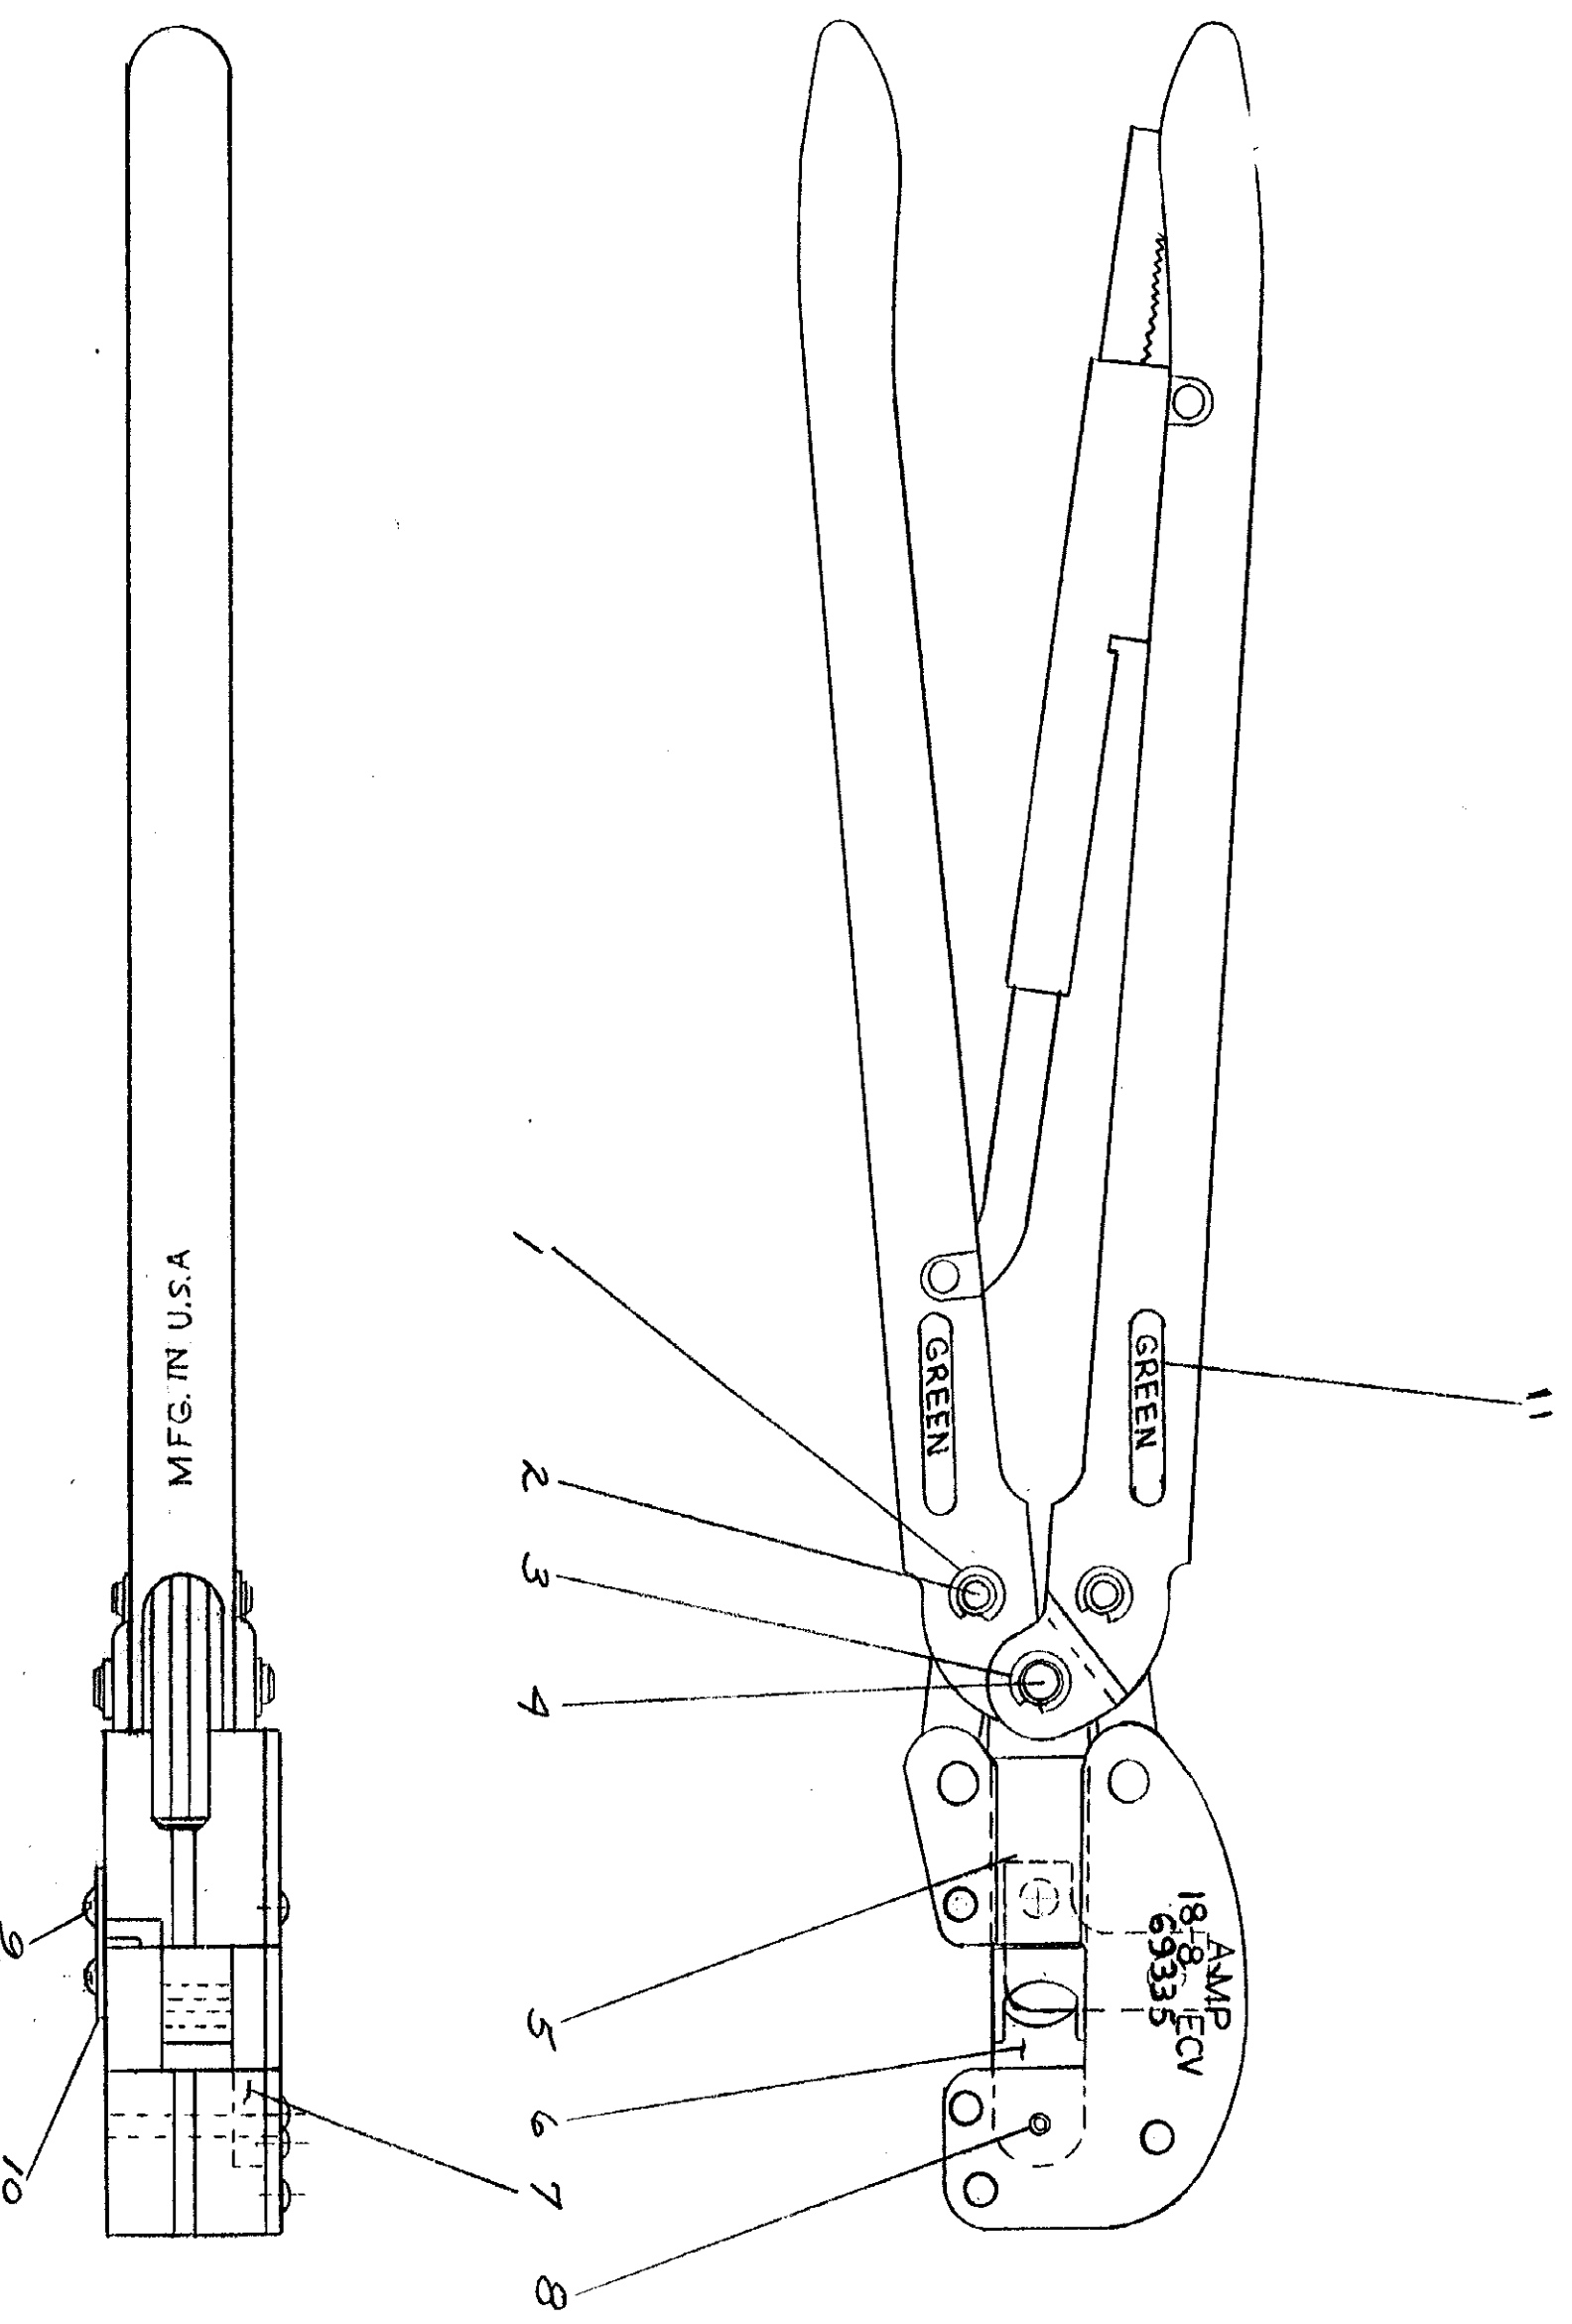

ENLARGED VIEW  
OF CRIMP

"A" DIM	
GO	NO GO
209	215

For replacement of parts other than listed, tool should be returned to our factory to insure proper Certi-Crimp adjustment.  
Gage dimensions apply when tool is bottomed but not under pressure.

QTY	PART NUMBER	NAME	REMARKS	TRD
4	A 313036-4	LABEL GREEN		11-
1	A 2304052-7	LOCATOR		10-
2	- 2-21002-5	SCREW		9-
1	A 5-21028-7	PIN		8-
1	A 3-305832-7	SPACER		7-
1	A 1/305731-5	ANVIL		6-
1	A 1/305730-5	INDENTER		5-
1	A 300389	PIN-RETAINING		4-
2	- 21045-6	RING-RETAINING		3-
2	A 300388	PIN-RETAINING		2-
4	- 21045-3	RING-RETAINING		1-

REQUIRED PER ASSEMBLY

AMP PRODUCTS COVERED BY PATENTS AND/OR PATENTS PENDING. REFERENCE ONLY

UNLESS OTHERWISE SPECIFIED: ANGLES: ± 0° 30'

REMOVE BURRS, BREAK SHARP EDGES 1/64 R. MAX. DECIMALS: .000 ± .005 .0000 ± .0005

AMP INCORPORATED HARRISBURG, PENNA.



CUSTOMER COPY

REVISION RECORD	DESCRIPTION	DATE	BY
K REVISED			
J REVISED			
I REVISED			
H REVISED			
G REVISED			
F REVISED			
E REVISED			
D REVISED			
C REVISED			
B REVISED			
A REVISED			

PRINT 89

DIMENSIONS IN INCHES. DO NOT SCALE PRINT.

AMP 18-8 ECV 700