


NOTES:

- 1.0 ELECTRICAL SPECIFICATIONS:
  - 1.1 FREQUENCY RANGE: DC to 4.0 GHz
  - 1.2 VSWR: 1.25:1 MAX.
  - 1.3 IMPEDANCE: 50 OHMS
  - 1.4 POWER: 2 WATTS AVG. AT +25°C  
DERATED LINEARLY TO 0.5 WATTS AT +125°C
  - 1.5 PEAK POWER: 0.25 KILOWATTS (5 MICRSECOND PULSE WIDTH).
  - 1.6 OPERATING TEMP. RANGE: -54°C to +125°C

2.0 MARKING: MARK UNIT AS SHOWN  
(REF.: INK-02611-27-42)

3.0 DIMENSIONS IN BRACKETS ARE IN MILLIMETERS.

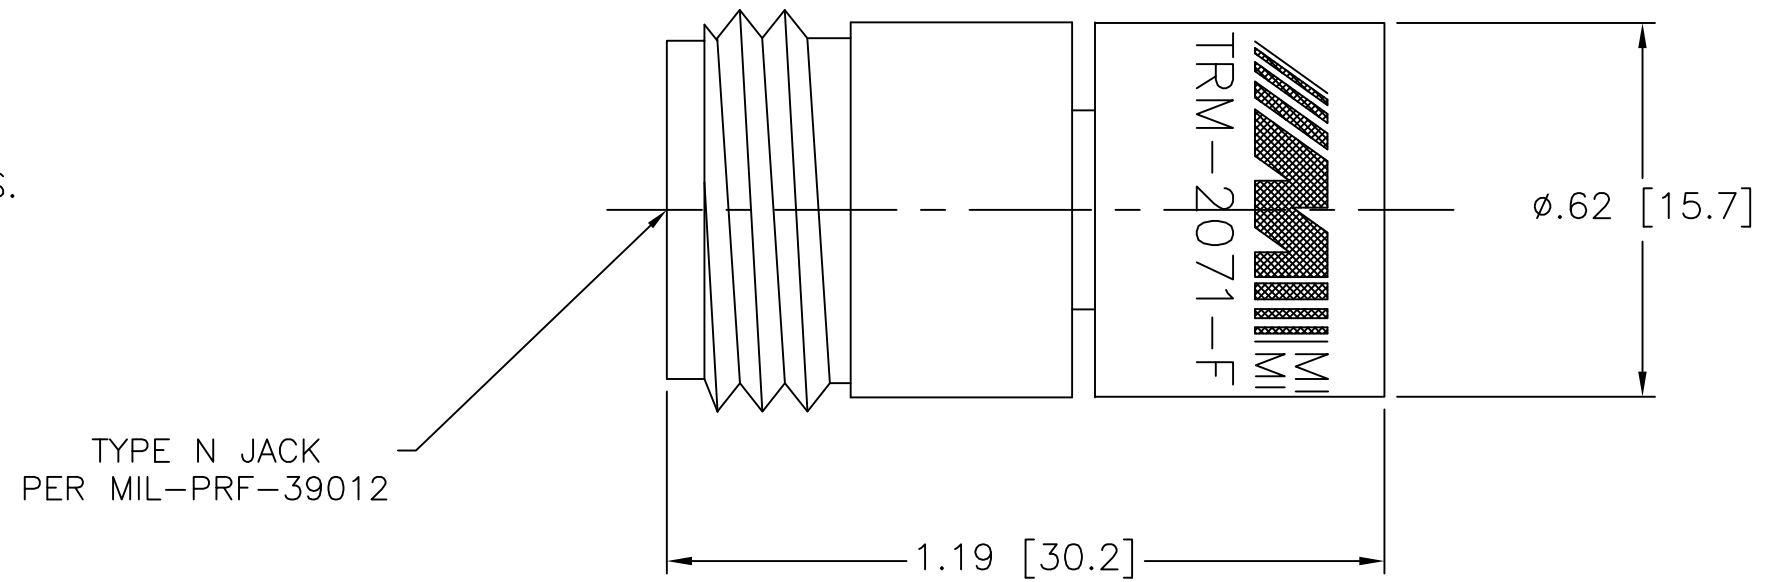

REV.	DESCRIPTION	DATE
-	RELEASED	8/12/93
-1	ADDED TITLEBLOCK	10/28/05

NOTICE: The information contained in this drawing is proprietary and must not be used without the permission of Emerson Network Power.  UNLESS OTHERWISE NOTED DIMENSIONS ARE IN INCHES AND TOLERANCES ARE: 3 PLACE DECIMALS ±.005 2 PLACE DECIMALS ±.02 FRACTIONS ±1/64 PARALLELITY: T.I.R. _____ FLATNESS: T.I.R. _____ CONCENTRICITY: T.I.R. _____ ANGLES AND PERPENDICULARITY: ±1°	CAGE CODE <b>34078</b>	<b>MIDWEST MICROWAVE</b>	
		TITLE TERMINATION OUTLINE DRAWING	
DRAWN/DATE A.BEATTY 8/4/93	ENG./DATE G.KOZAK 8/10/93	DRAWING NUMBER TRM-2071-FO-NNN-07-01	REV. -1
CHECKED/DATE M.HOLLMAN 8/6/93	APPROVED/DATE	SCALE: 3=1	SHEET 1 of 1