

- Operating temperature range of -40°C to +100°C in DC


		6 +0/-1		

	-40 to +70°C		
	-40 to +100°C		
Dissipation Factor $\tan\delta$	Maximum Values at +23°C		
	Measured at +20°C, According to IEC 60384-2		
	$C \leq 0.33 \mu\text{F}$	$\geq 12,000 \text{ M}\Omega$	
		$\geq 4,000 \text{ M}\Omega \cdot \mu\text{F}$	
	PME261 K measured at 100 VDC after 60 seconds, +23°C		
	PME261 E and J measured at 500 VDC after 60 seconds, +23°C		

This has increased the liquidus temperature from that of 183°C for SnPb eutectic alloy to 217 – 221°C for the new alloys. As a temperatures. Polypropylene capacitors are especially sensitive to heat (the melting point of polypropylene is 160 – 170°C).


15 mm), and great care has to be taken during soldering. The recommended solder profiles from KEMET should be used. Please


Reflow soldering is not recommended for through-hole film capacitors. Exposing capacitors

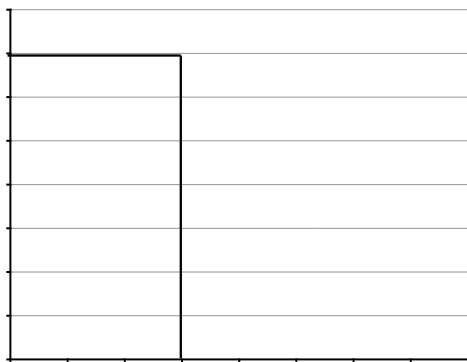

be set at 350°C (+10°C maximum) with the

	≤				

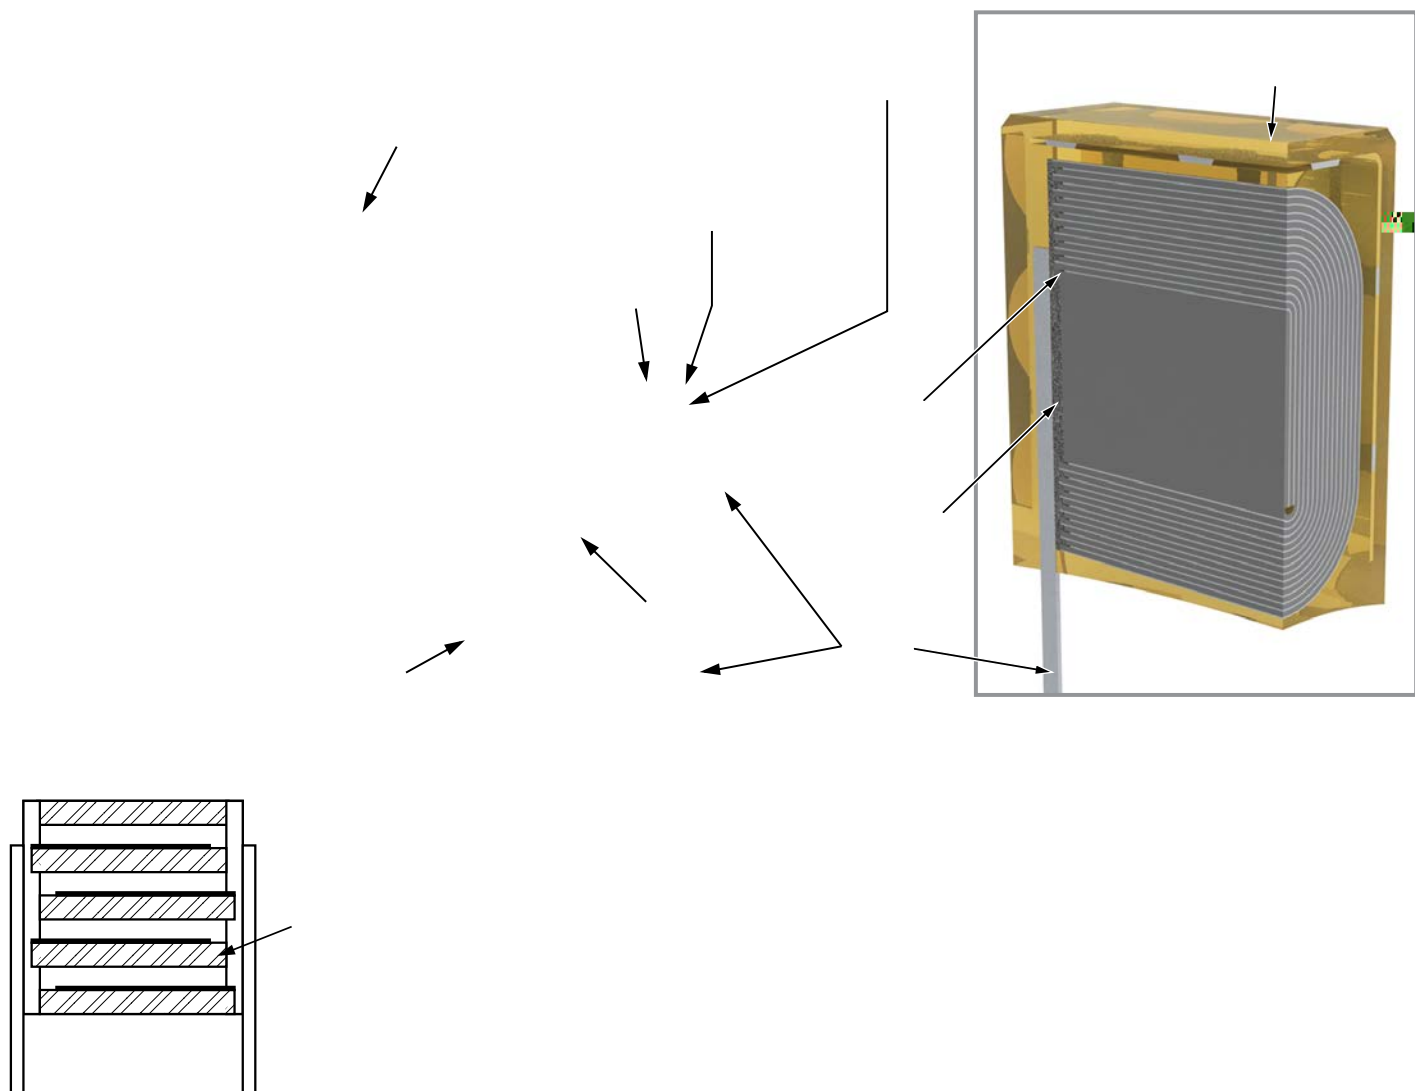

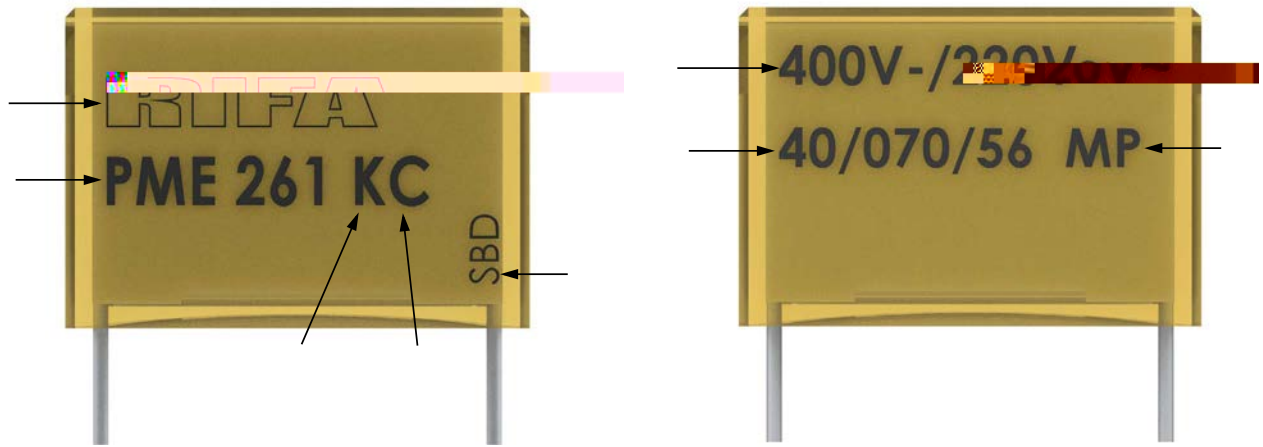

For a complete list of our global sales offices, please visit www.kemet.com/sales.

All product specifications, statements, information and data (collectively, the "Information") in this datasheet are subject to change. The customer is responsible for

Statements of suitability for certain applications are based on KEMET Electronics Corporation's ("KEMET") knowledge of typical operating conditions for such applications, but are not intended to constitute – and KEMET specifically disclaims – any warranty concerning suitability for a specific customer application or use.
