THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 20
© COPYRIGHT 20 BY - ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	DWN	APVD
			A	FIRST VERSION	23NOV2015	G.F	S.H

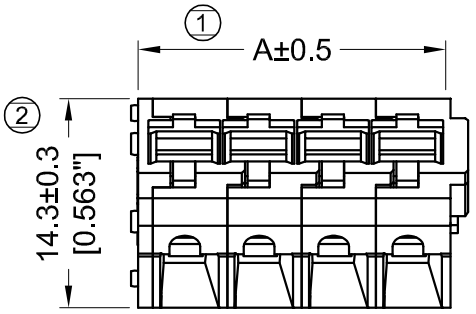

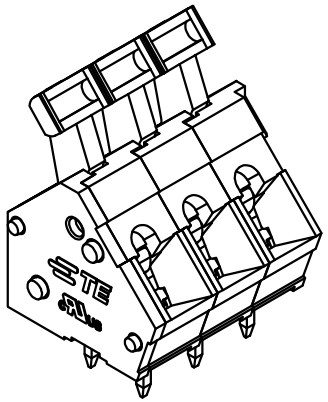

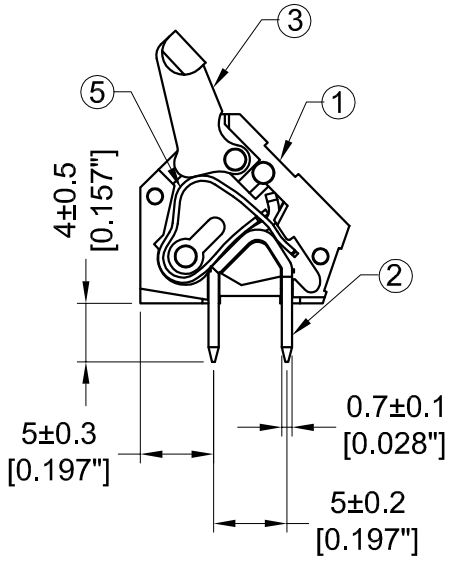



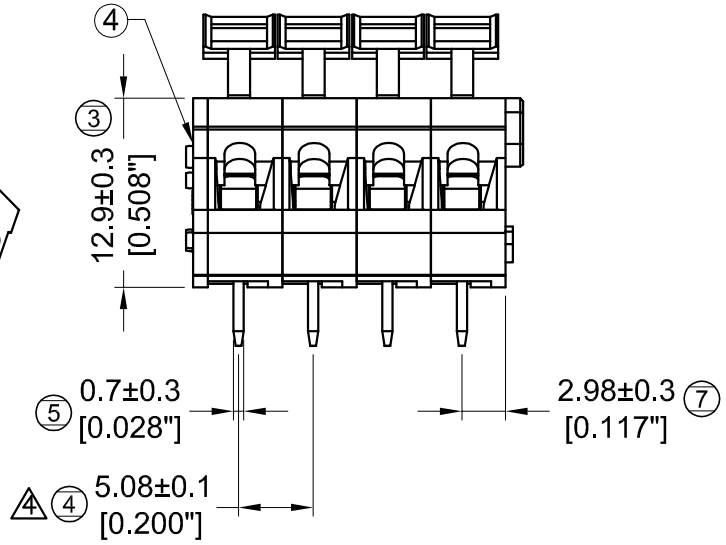

⑤	SPRING
④	COVER
③	LEVER
②	CONTACT
①	HOUSING

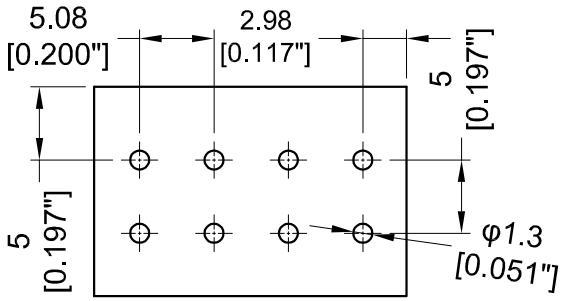

PCB Layout

COLOR	DIM A	NO. OF POSITIONS	PART NO
GRAY	41.64	8 POSN	2834077-7
	36.56	7 POSN	2834077-6
	31.48	6 POSN	2834077-5
	26.40	5 POSN	2834077-4
	21.32	4 POSN	2834077-3
	16.24	3 POSN	2834077-2
	11.16	2 POSN	2834077-1

NOTES :

⚠1 MATERIALS AND FINISH:
- HOUSING: PA66
- CONTACTS: BRASS, FINISH: TIN OVER NICKEL UNDERPLATE

2. MUST COMPLY WITH DIRECTIVE 2002/95/EC (RoHS)
3. WIRE TYPES AND SIZES ACCEPTED
   WIRE RANGE: 14AWG~28AWG.
   STRIP LENGTH: 10mm
4. PACKAGED IN TRAY.
5. CURRENT RATING: 16Amp AC300V.
6. OPERATION TEMPERATURE: -40°C TO +105°C
7. THIS PART No. IS THE SAME STRUCTURE AS THE SERIES: 2834077
   THE DATASHEET AND MORE DETAILS PLEASE FOLLOW THE SERIES: 2834077

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED
0 PLC ±0.20
1 PLC ±0.13
2 PLC ±0.1
3 PLC
4 PLC
ANGLES ±2°

MATERIAL ⚠1
FINISH ⚠1

DWN	GEORGE FU	23NOV2015
CHK	SHI MING	23NOV2015
APVD	XU XIANG	23NOV2015
PRODUCT SPEC	108-137146	
APPLICATION SPEC	114-137146	
WEIGHT	-	

TE Connectivity

NAME: 5.08mm 45° Entry Screwless Connector

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A2	00779	C-2834077	-

CUSTOMER DRAWING | SCALE 1:1 | SHEET 1 OF 1 | REV A

1471-9 (3/11)