
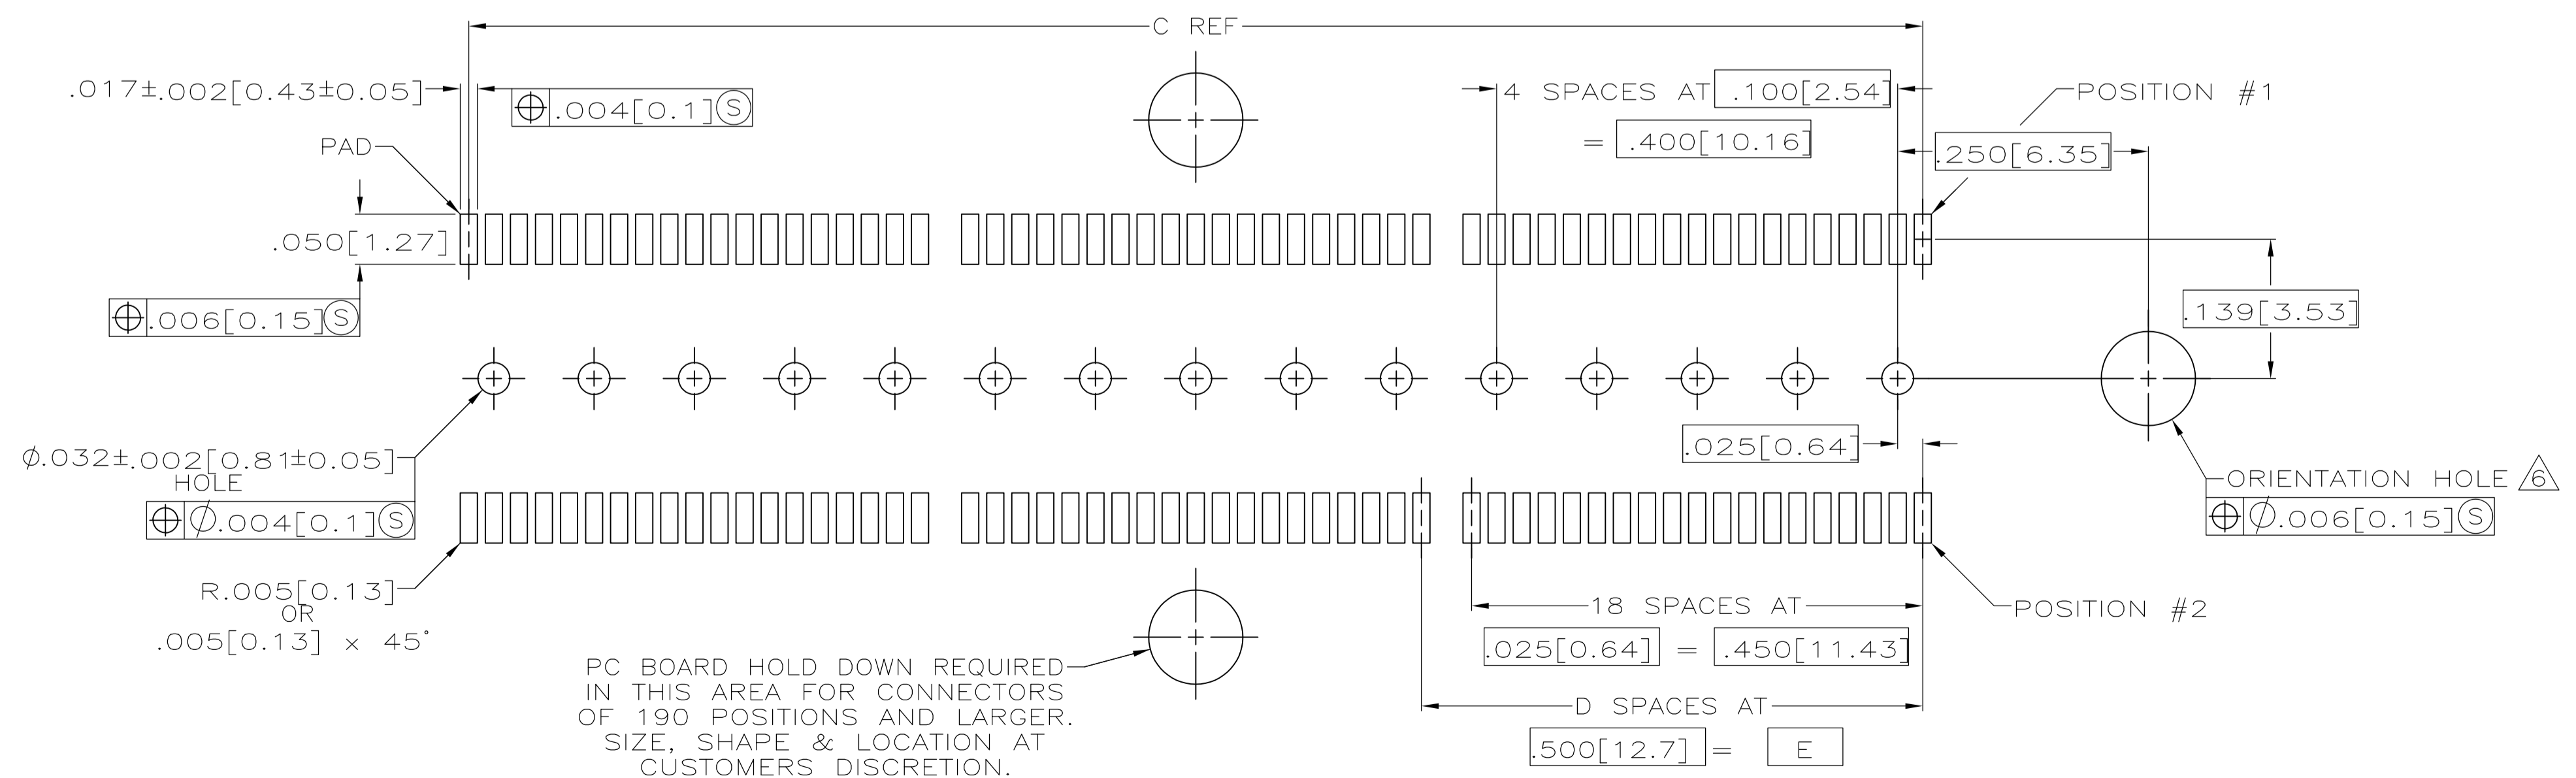
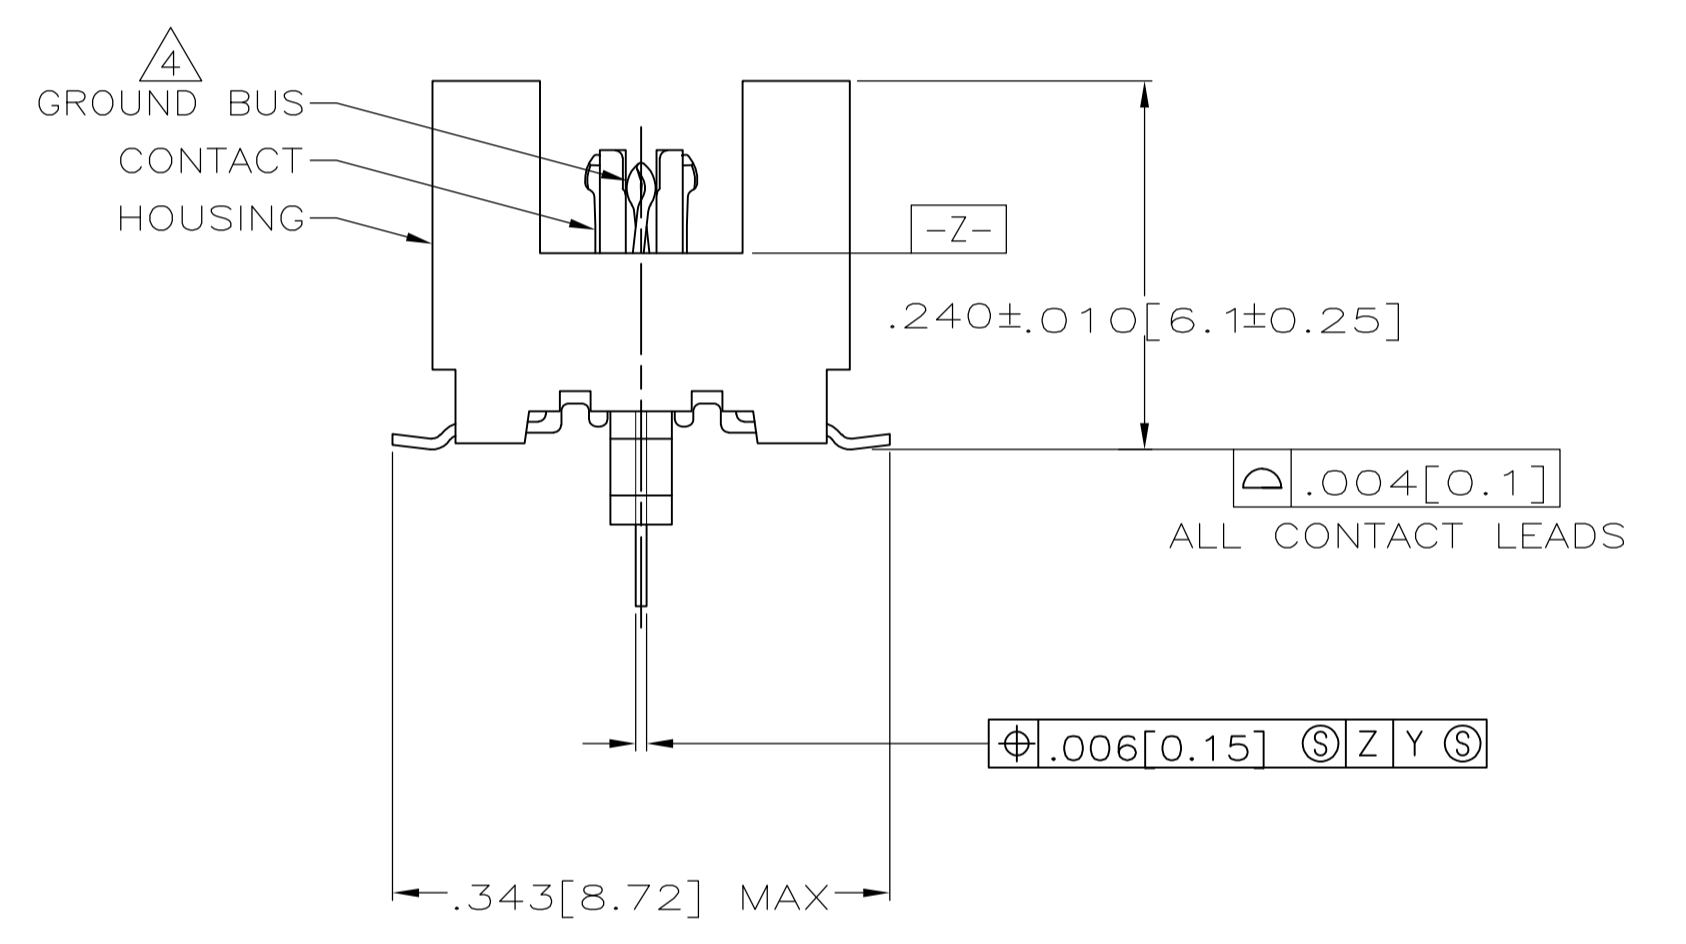


- 1 HOUSING: LIQUID CRYSTAL POLYMER, COLOR BLACK.
CONTACTS: HIGH RELIABILITY COPPER ALLOY.
GROUND BUSES: PHOSPHOR BRONZE ALLOY, UNS C51100.
- 2 CONTACTS & GROUND BUSES: NICKEL UNDERPLATE ALL OVER, MATING SURFACE PLATED TO MEET LEVEL 2 PERFORMANCE REQUIREMENTS OF TE PRODUCT SPECIFICATION 108-1422, SOLDER TAILS PLATED TIN-LEAD.
- 3 DATE CODE MARKED IN AREA INDICATED ON SIDE OPPOSITE POSITION #1.
- 4 ONE GROUND BUS WITH 5 TAILS PER EACH MODULE.
- 5 TOLERANCE NON-ACCUMULATIVE.
- 6 FOR STANDARD APPLICATIONS, ORIENTATION HOLE TO BE $\phi .094 \pm .002 [2.39 \pm 0.05]$.
FOR SLIP-FIT APPLICATIONS, ORIENTATION HOLE TO BE $\phi .079 \pm .001 [2.00 \pm 0.03]$.

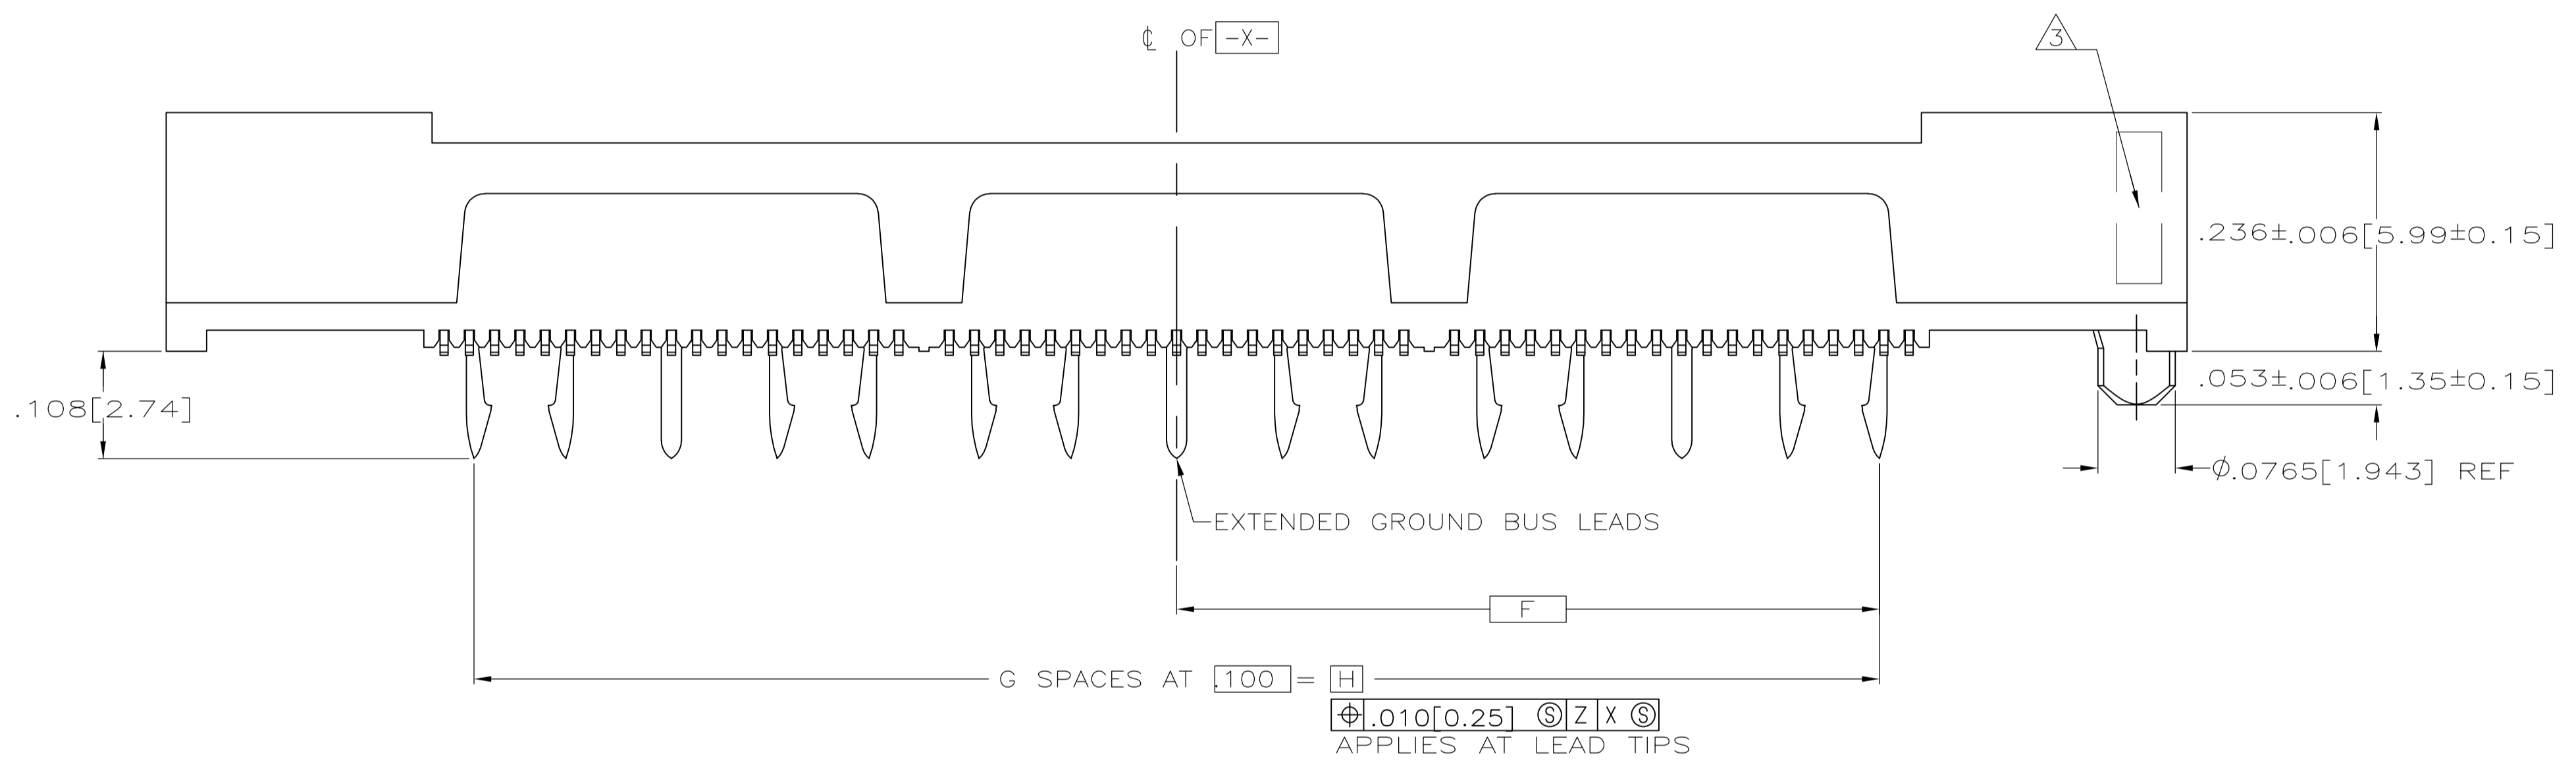

3.400 [86.36]	34	1.700 [43.18]	767100-7
2.900 [73.66]	29	1.450 [36.83]	767100-6
2.400 [60.96]	24	1.200 [30.48]	767100-5
1.900 [48.26]	19	.950 [24.13]	767100-4
1.400 [35.56]	14	.700 [17.78]	767100-3
.900 [22.86]	9	.450 [11.43]	767100-2
.400 [10.16]	4	.200 [5.08]	767100-1
H	G	F	PART NUMBER

3.000 [76.2]	6	3.450 [87.63]	3.900 [99.06]	4.000 [101.6]	266	767100-7
2.500 [63.5]	5	2.950 [74.93]	3.400 [86.36]	3.500 [88.9]	228	767100-6
2.000 [50.8]	4	2.450 [62.23]	2.900 [73.66]	3.000 [76.2]	190	767100-5
1.500 [38.1]	3	1.950 [49.53]	2.400 [60.96]	2.500 [63.5]	152	767100-4
1.000 [25.4]	2	1.450 [36.83]	1.900 [48.26]	2.000 [50.8]	114	767100-3
.500 [12.7]	1	.950 [24.13]	1.400 [35.56]	1.500 [38.1]	76	767100-2
.000 [0]	0	.450 [11.43]	.900 [22.86]	1.000 [25.4]	38	767100-1
E	D	C	B	A	NO OF POS	PART NUMBER

RECOMMENDED PC BOARD LAYOUT
(VIEWED FROM CONNECTOR SIDE)

THIS DRAWING IS A CONTROLLED DOCUMENT.

DW: J.GERACE 4-28-98
 CHK: S.STRICKLER 4-28-98
 APD: A.MONK 4-28-98

Product Name: RECEPTACLE ASSEMBLY, VERTICAL, GULL WING LEADS, .025[0.64] CENTER LINE, MICTOR

Product Spec: 108-1422

Application Spec: 114-11004

Size: A1

Customer Drawing: 00779

Scale: 8:1

Sheet: 1 of 1

Rev: F