

## AI 0,75- 6 WH

Order No.: 3201314

The figure shows the version AI 0,5-6 WH

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=3201314>

Ferrule, Length: 12 mm, Color: white

### Commercial data

GTIN (EAN)	4017918094812
sales group	B250
Pack	100 pcs.
Customs tariff	85369010
Weight/Piece	0.000077 KG
Catalog page information	Page 663 (CL-2009)

### Product notes

WEEE/RoHS-compliant since:  
11/22/2005

<http://www.download.phoenixcontact.com>  
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

### Technical data

#### General

Length (b)	12 mm
Color	white
Material	E-CU
Sleeve length	6 mm
Inner dimension of the insulating collar (d)	2.8 mm

Ferrule diameter	1.3 mm
Insulating collar thickness	0.25 mm
Sleeve wall thickness	0.15 mm


### Certificates / Approvals



Certification CSA, UCSA

### Diagrams/Drawings

Dimensioned drawing

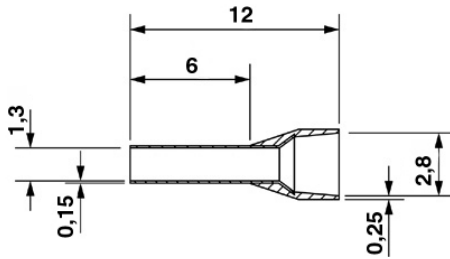

**Address**

PHOENIX CONTACT Inc., USA  
586 Fulling Mill Road  
Middletown, PA 17057, USA  
Phone (800) 888-7388  
Fax (717) 944-1625  
<http://www.phoenixcon.com>



© 2010 Phoenix Contact  
Technical modifications reserved;