



DATE	DWN	APP'D
28APR05	HXF	DF

200mm

20mm REF

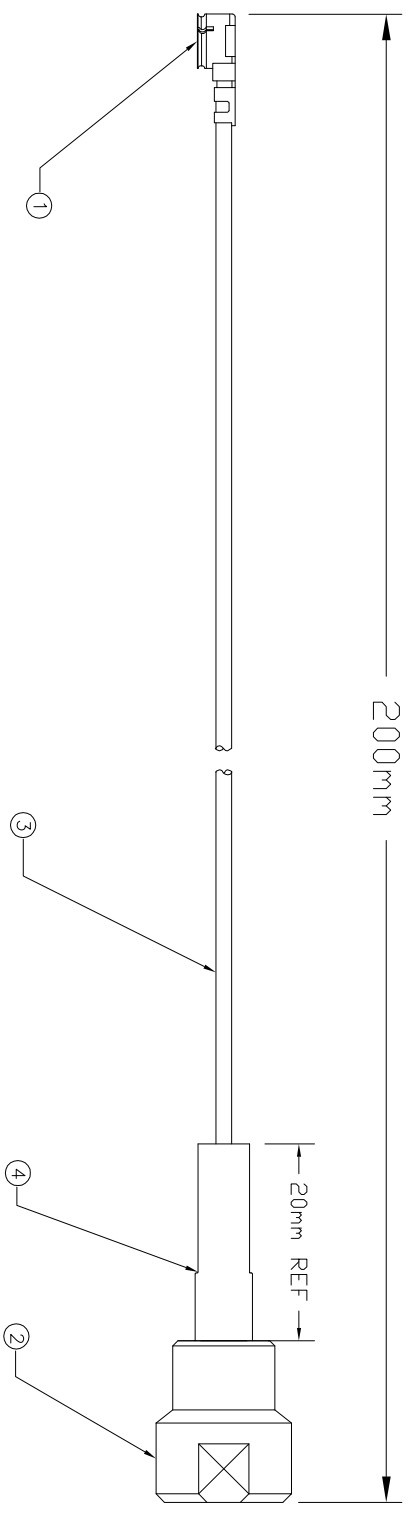

2.5 MAX

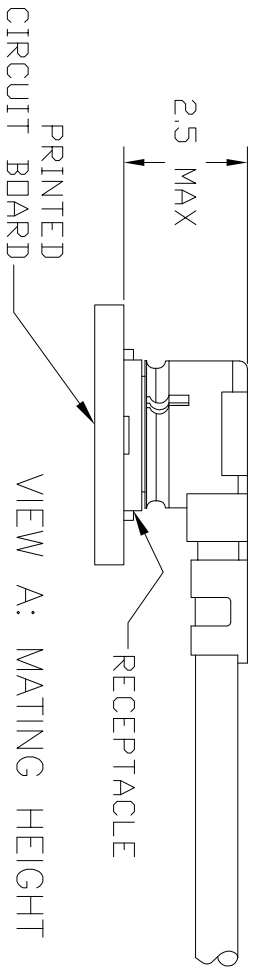

- NOTES:
1. HIROSE COMPATIBLE
  2. 100% ELECTRICAL TESTING FOR: CONTINUITY AND SHORTS, HI-POT AT 150 VDC FOR 100ms FREQUENCY RANGE: DC TO 2 GHz VSWR 1.3:1 MAX
  3. PRODUCT RATINGS:  
 TEMPERATURE: -40 TO +90 DEG.C  
 VOLTAGE: 60 VAC  
 CHARACTERISTIC IMPEDANCE: 50 OHMS  
 UMCC MATING DURABILITY: 30 CYCLES  
 FME MATING DURABILITY: 500 CYCLES

QTY	UNIT	DESCRIPTION	ITEM
1	PC	TUBING, HEAT SHRINK	4
1	MM	MINIATURE COAX CABLE, 1.37mm OD	3
1	PC	FME PLUG FOR 1.37 OD CABLE	2
1	PC	UMCC TYPE III PLUG	1

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN Hoo, Xiangfeng  
 CHK Paul Zhou  
 APP'D DENVER WILSON  
 PRODUCT SPEC  
 APPLICATION SPEC

28APR05  
 28APR05  
 13JUN05

**tyco**  
**Electronics**  
 Tyco Electronics Corporation  
 KunShan, CHINA 215321

CABLE ASSY, UMCC TYPE III PLUG TO  
 FME PLUG ON 1.37mm CABL

DIMENSIONS:	TOLERANCE UNLESS OTHERWISE SPECIFIED:	FINISH	WEIGHT
MM	0 PLC ± 1 PLC ± 2 PLC ± 3 PLC ± 4 PLC ±	-	-

SIZE	DWG CODE	DRAWING NO	RESTRICTED TO
A4	00779	1750110-2	-