



Max. Temperature : 260° during 10 seconds

09551563620.741	1	4-40 UNC	Black Insulator	Reel Packaging (160 connectors) see page 2/2
09551566620.741	2			
09551567620.741	3			
Part number	PL	Thread	Index designation	

				Dot.	Name
				Detail.	28Aug2009 ED
				Insp.	
				Stand.	
EC01215	14Jan2010	ED	HARTING EURL F-95972 Paris		
EC00775	28Aug2009	ED			
Mod.	Dot.	Name			



D-SUB SMT Low Profile Female 9p with die casted grounds and 4-40 UNC unremovable screwlocks		Maßstab/ Scale 1,5:1
TB 09 55 156 x620		Blatt/ Page 1/2
Sub.		

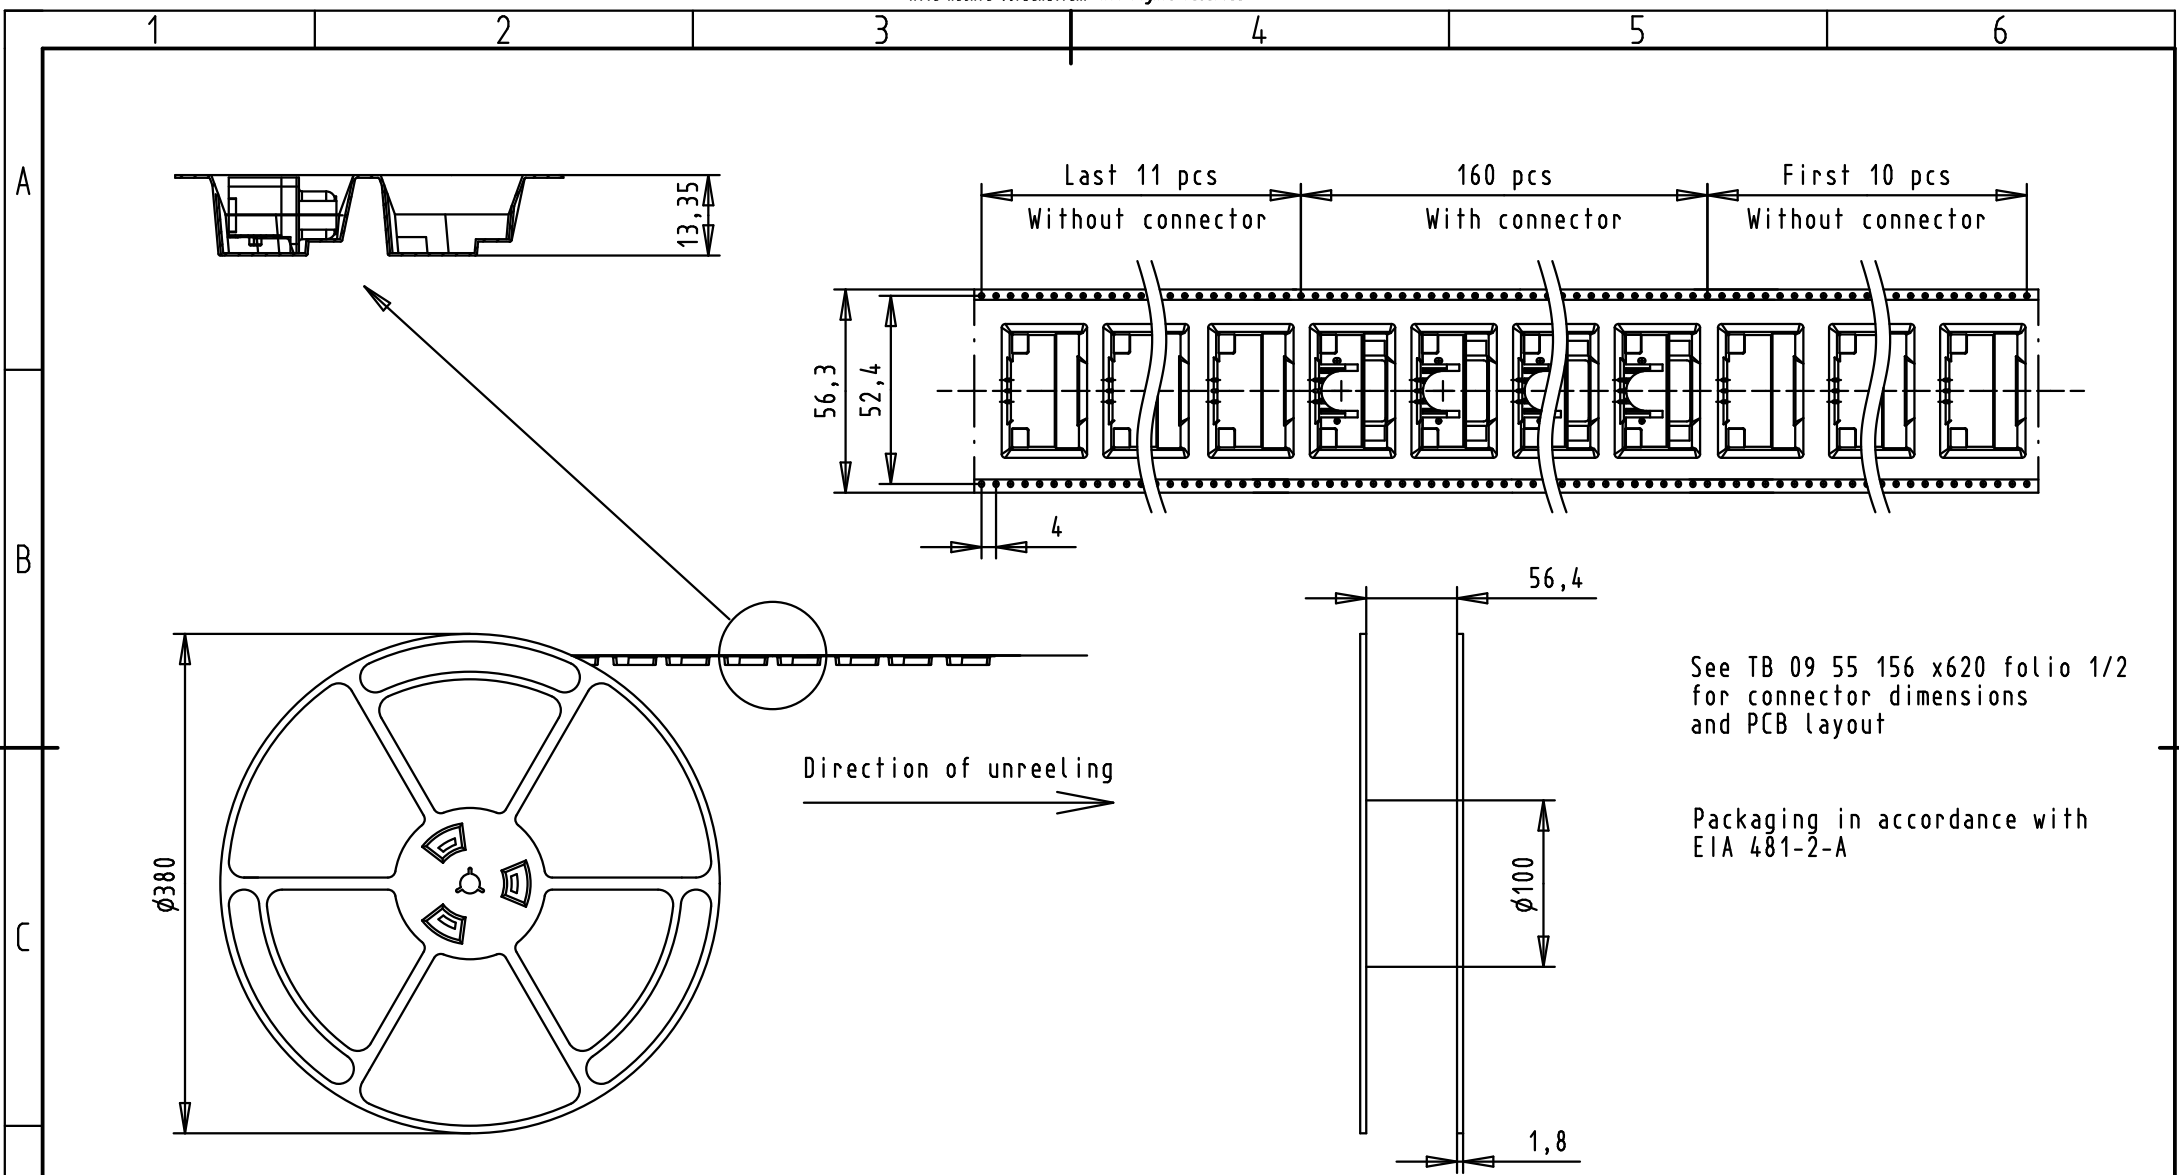

See TB 09 55 156 x620 folio 1/2 for connector dimensions and PCB layout

Packaging in accordance with EIA 481-2-A

09551563620.741	1	4-40 UNC	Black Insulator	Reel Packaging (160 connectors)
09551566620.741	2			
09551567620.741	3			
Part number	PL	Thread	Index designation	

Detail.	28Aug2009	ED		
Insp.				
Stand.				
Mod.	Dot.	Name		

Dat. Name
 28Aug2009 ED
 All Dim. in mm
 Orig. Size DIN A 4
HARTING
 HARTING EURL
 F-95972 Paris

D-SUB SMT
 Low Profile Female 9p
 with die casted grounds and
 4-40 UNC unremovable screwlocks
TB 09 55 156 x620
 Sub.