



| COUNT | DESCRIPTION OF REVISIONS | BY | CHKD | DATE | COUNT | DESCRIPTION OF REVISIONS | BY | CHKD | DATE |
|-------|--------------------------|----|------|------|-------|--------------------------|----|------|------|
| △ | | | | | △ | | | | |
| △ | | | | | △ | | | | |

A B C D E F

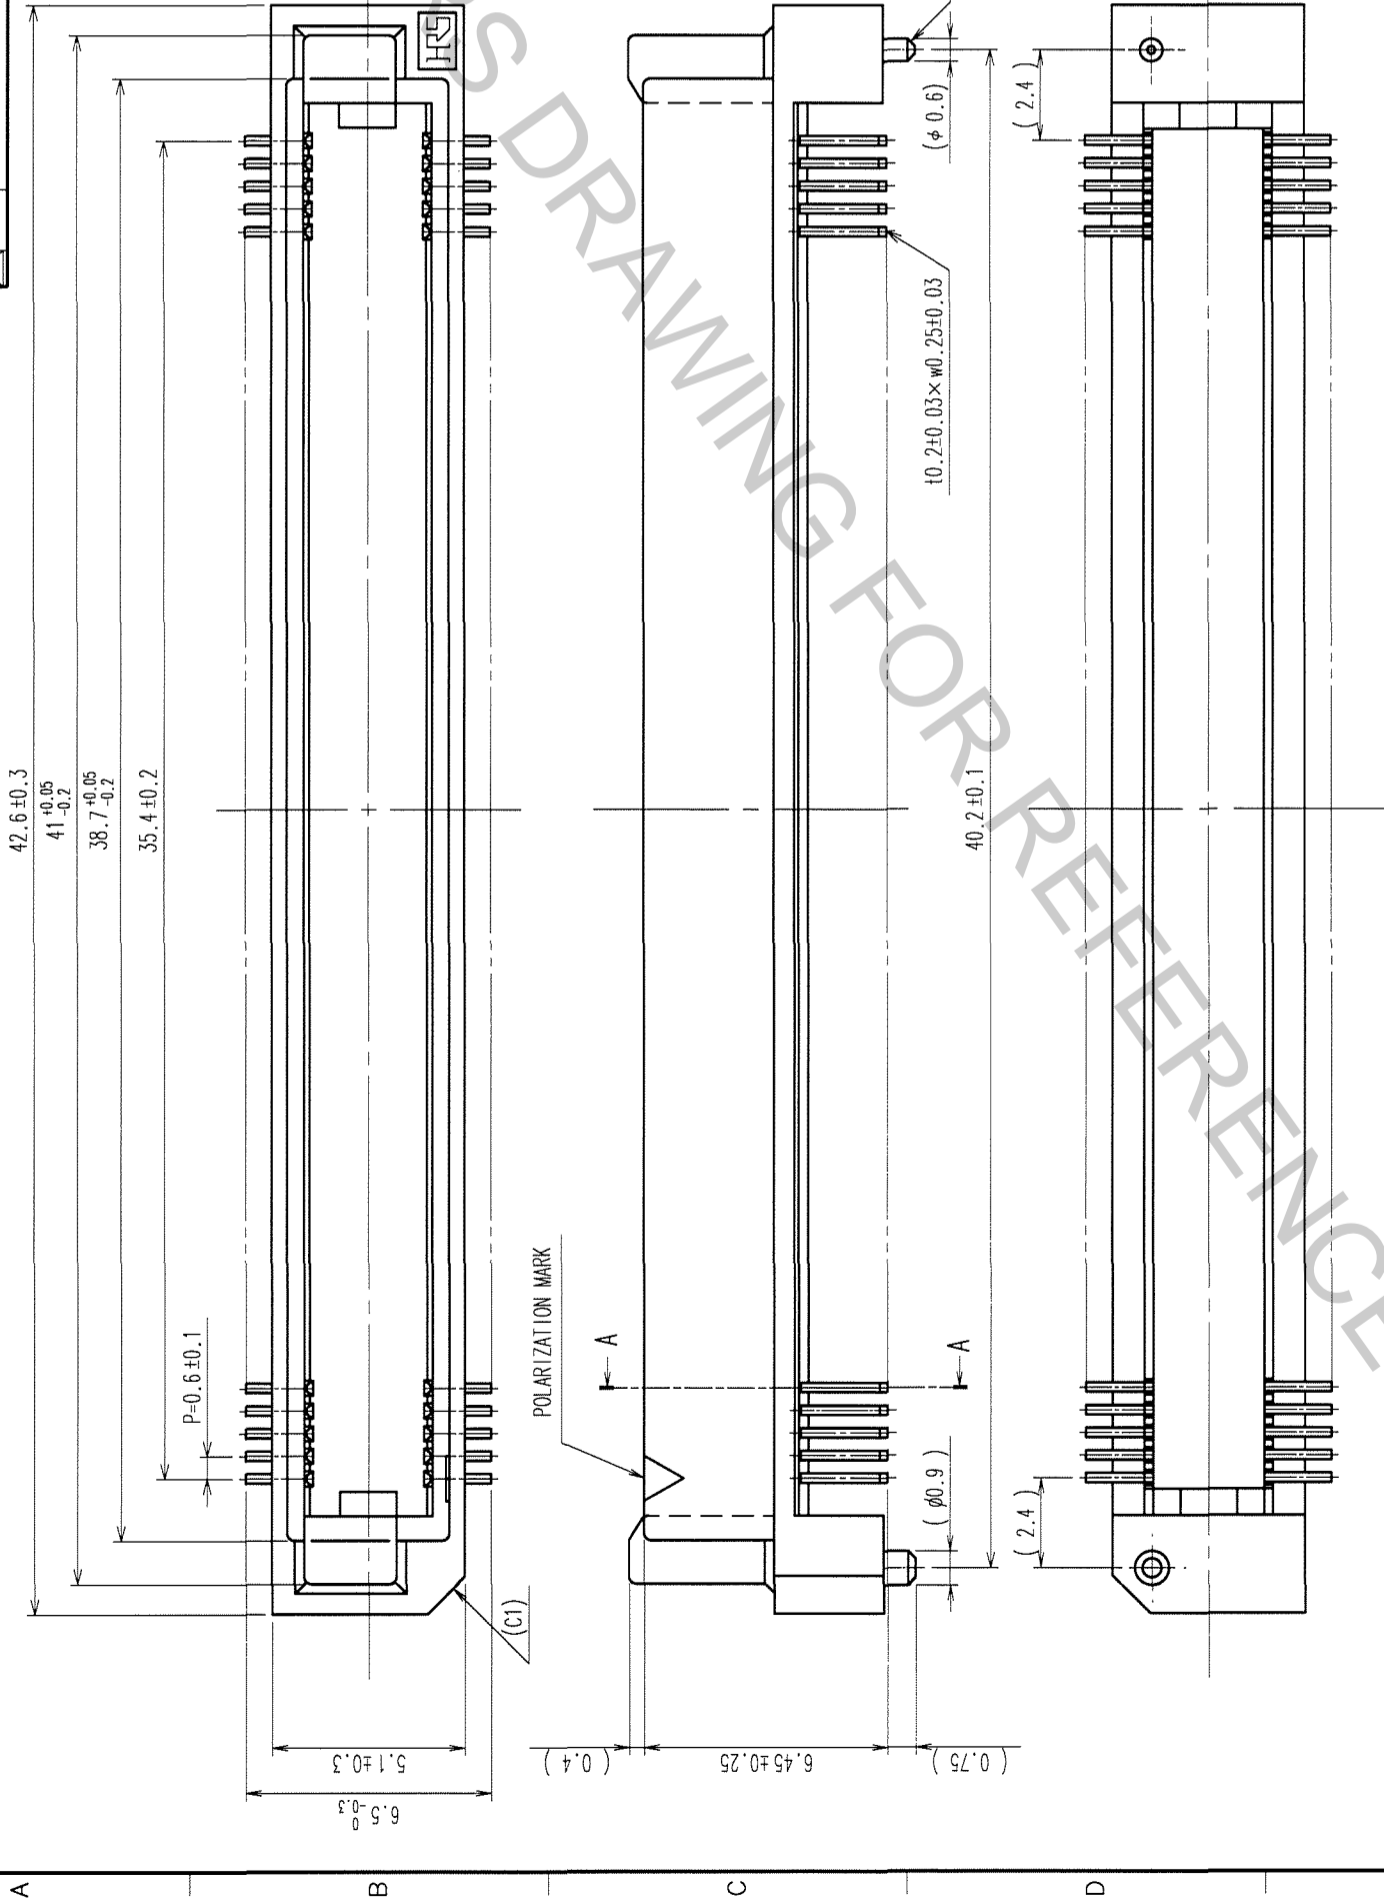

RECOMMENDED LAND PATTERN DIMENSION OF PCB (MOUNTING SIDE) (2:1)

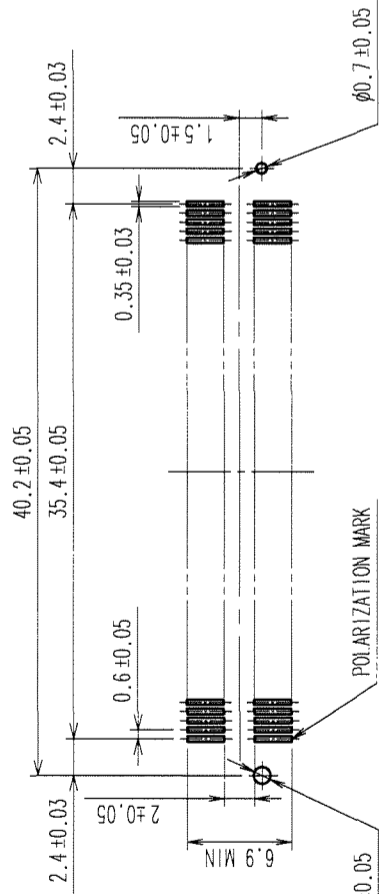

- NOTE 1. LEAD CO-PLANARITY SHALL BE 0.1mm MAX.
 2. FOR MODIFICATION, ETC., PREVENTIVE HOLE FOR SINK MARK MAY BE ADDED ACCORDING TO CIRCUMSTANCES.
 3. THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.

| | | | | | |
|-------------------------------|-------------|-------------------------------|----------------------|-------------------------|---|
| 1 | PPS | LIGHT BROWN (UL94V-0) | 2 | PHOSPHOR BRONZE | CONTACT AREA: GOLD 0.1 μm min. LEAD AREA: TIN-PLATING 1 μm min. UNDER PLATING: NICKEL 1 μm min. |
| NO. | MATERIAL | FINISH, REMARKS | NO. | MATERIAL | FINISH, REMARKS |
| CODE NO. (COLD) CL | | | DRAWN K. NAKAMURA | DESIGNED K. NAKAMURA | CHECKED X. Ogawa |
| | | | 05.11.17 | 05.11.17 | 05.11.17 |
| DRAWING NO. EDC3-150844-25 | | PART NO. FX8C-120P-SV2(71) | | APPROVED H. Kawano | |
| SCALE 5 : 1 | UNITS mm | | RELEASED | | |
| HIROSE ELECTRIC CO., LTD. | | CL578-0546-7-71 | | FORM NO. 229 | |

TO
PCK