



Aug.1.2018 Copyright 2018 HIROSE ELECTRIC CO., LTD. All Rights Reserved.  
 In case that the application demands a high level of reliability, such as automotive,  
 please contact a company representative for further information.

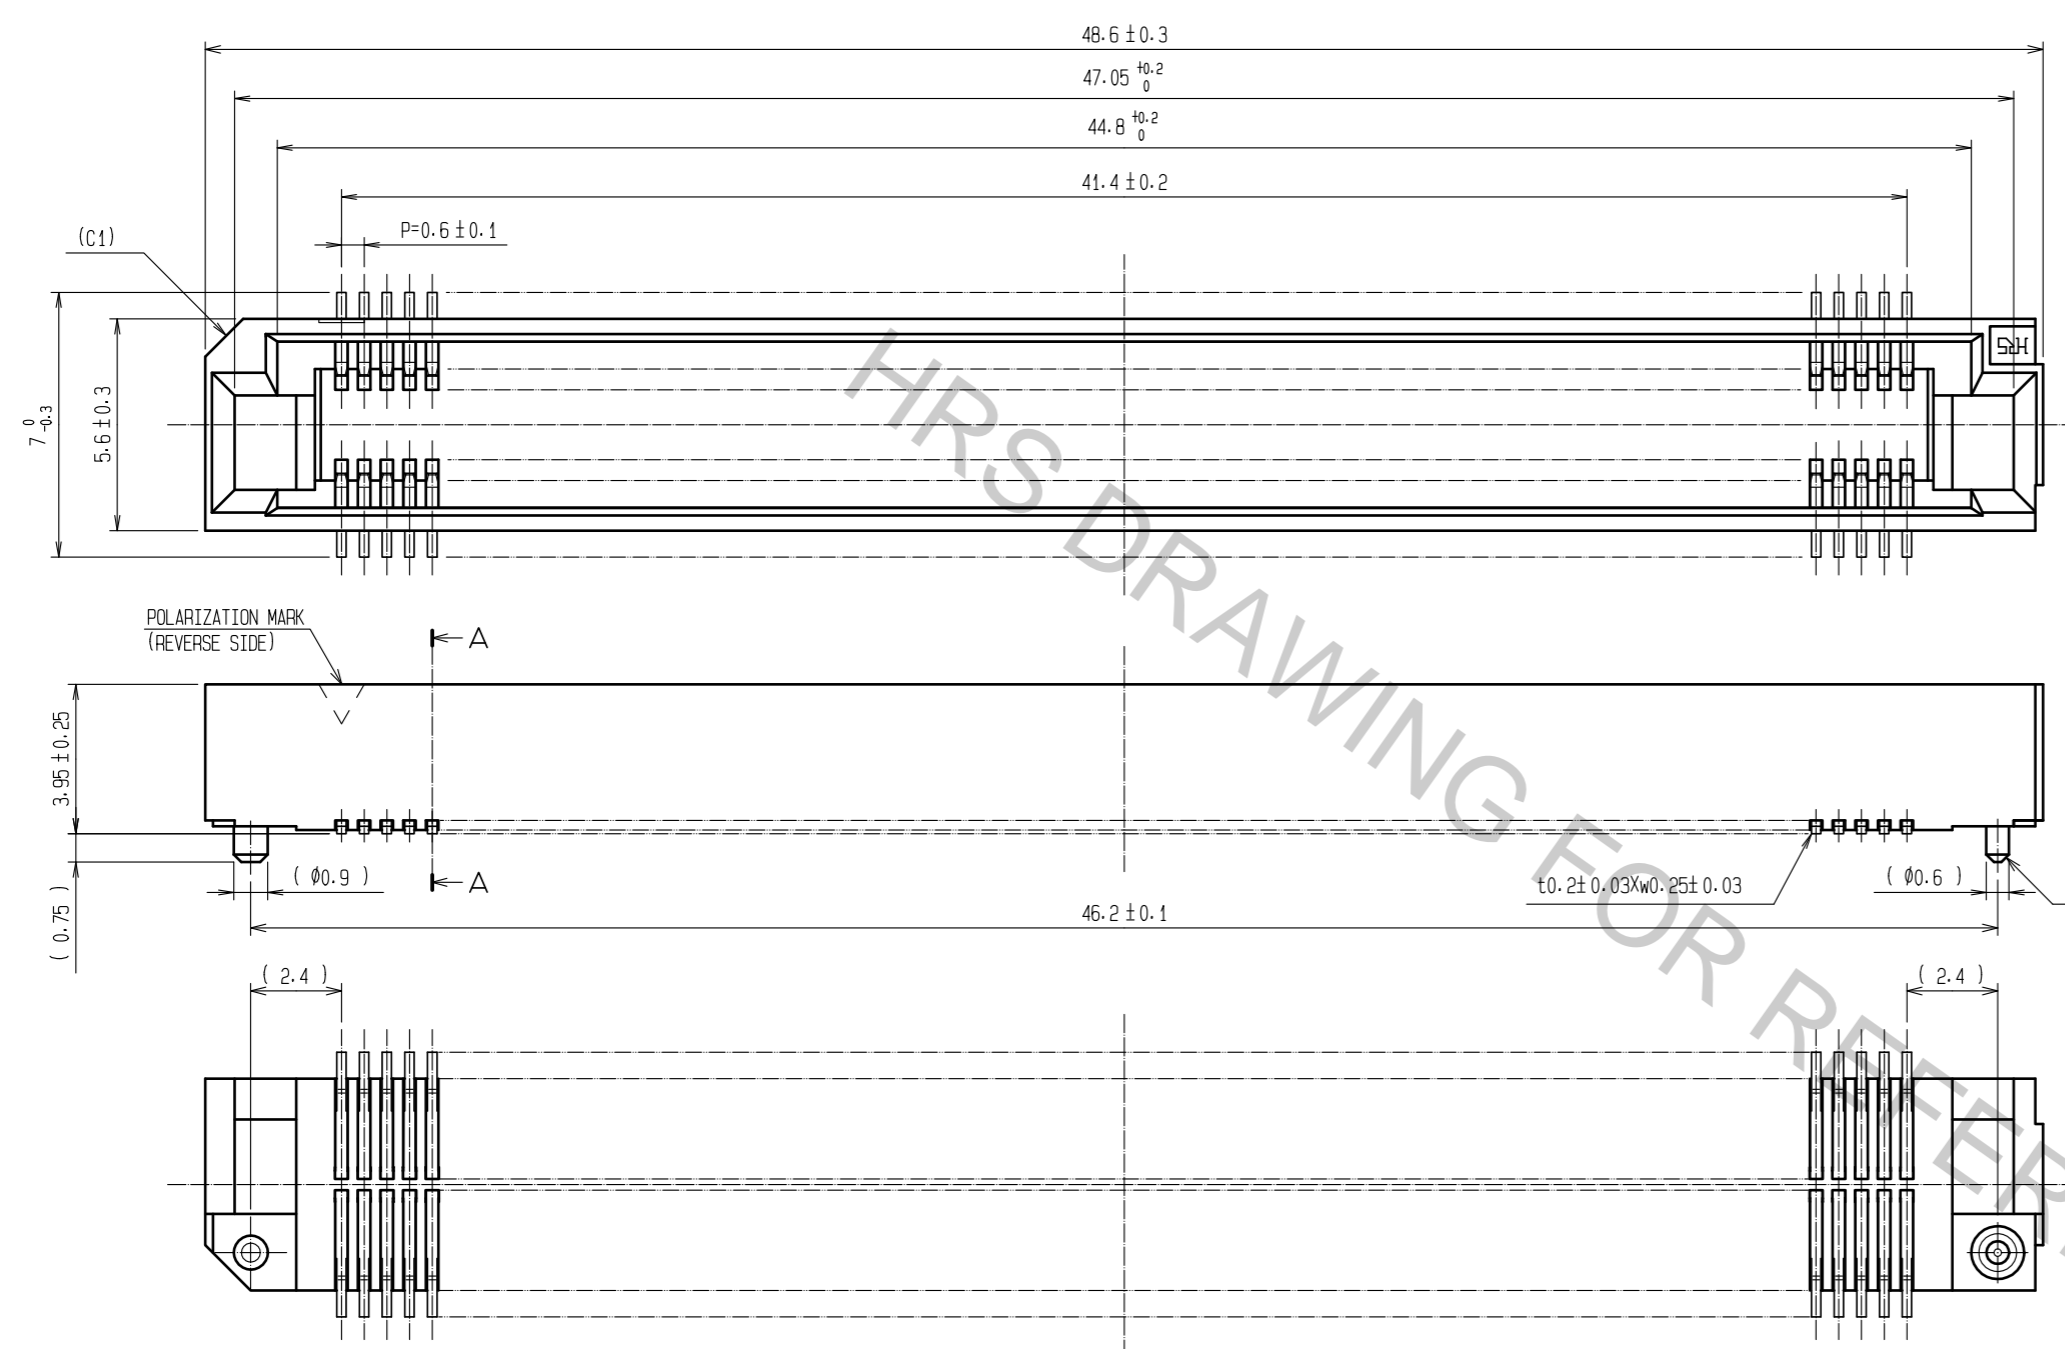


- NOTE 1. LEAD CO-PLANARITY SHALL BE 0.1mm MAX.  
 2. TUBE PACKAGING SHALL BE APPLIED FOR THIS PRODUCT. SEE NEXT PAGE FOR DETAILS.  
 3. FOR MODIFICATION, ETC., PREVENTIVE HOLE FOR SINK MARK MAY BE ADDED ACCORDING TO CIRCUMSTANCES.  
 4. THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.

RECOMMENDED LAND PATTERN DIMENSION OF PCB (MOUNTING SIDE) (2:1)  
 (RECOMMENDED METAL MASK THICKNESS:0.15mm)

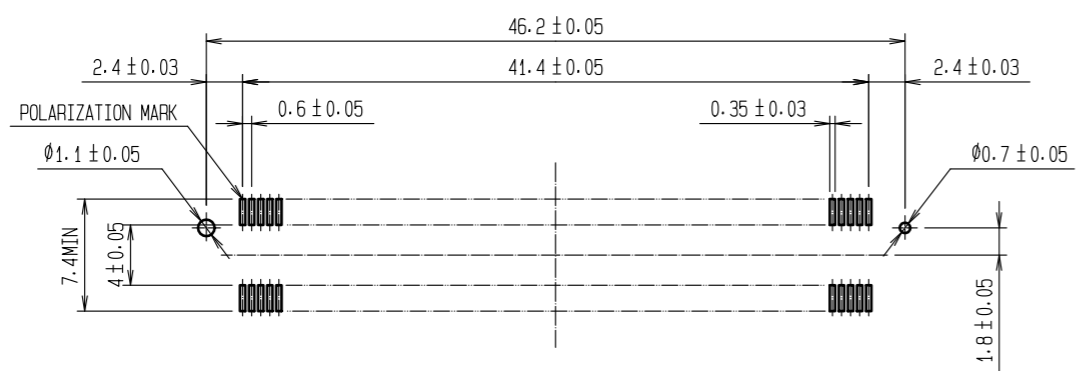

2	PHOSPHOR BRONZE	CONTACT AREA:GOLD 0.1µm min. LEAD AREA:GOLD 0.03µm min.	4	ELASTOMERS	(STOPPER)			
1	PPS	UNDER PLATING:NICKEL 1.5µm min. LIGHT BROWN (UL94V-0)	3	POLYVINYL CHLORIDE	(TUBE)			
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS			
UNITS	mm	SCALE	5 : 1	COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
<b>HRS</b> HIROSE ELECTRIC CO., LTD.		APPROVED : NH. NAKATA	18.02.28	DRAWING NO. EDC-150885-68-00				
		CHECKED : HT. YAMAGUCHI	18.02.28	PART NO. FX8C-140S-SV(68)				
		DESIGNED : TY. EDAGAWA	18.02.28	CODE NO. CL578-0807-9-68				
		DRAWN : MK. INOUE	18.02.23					

DRAWING FOR PACKING(FREE)

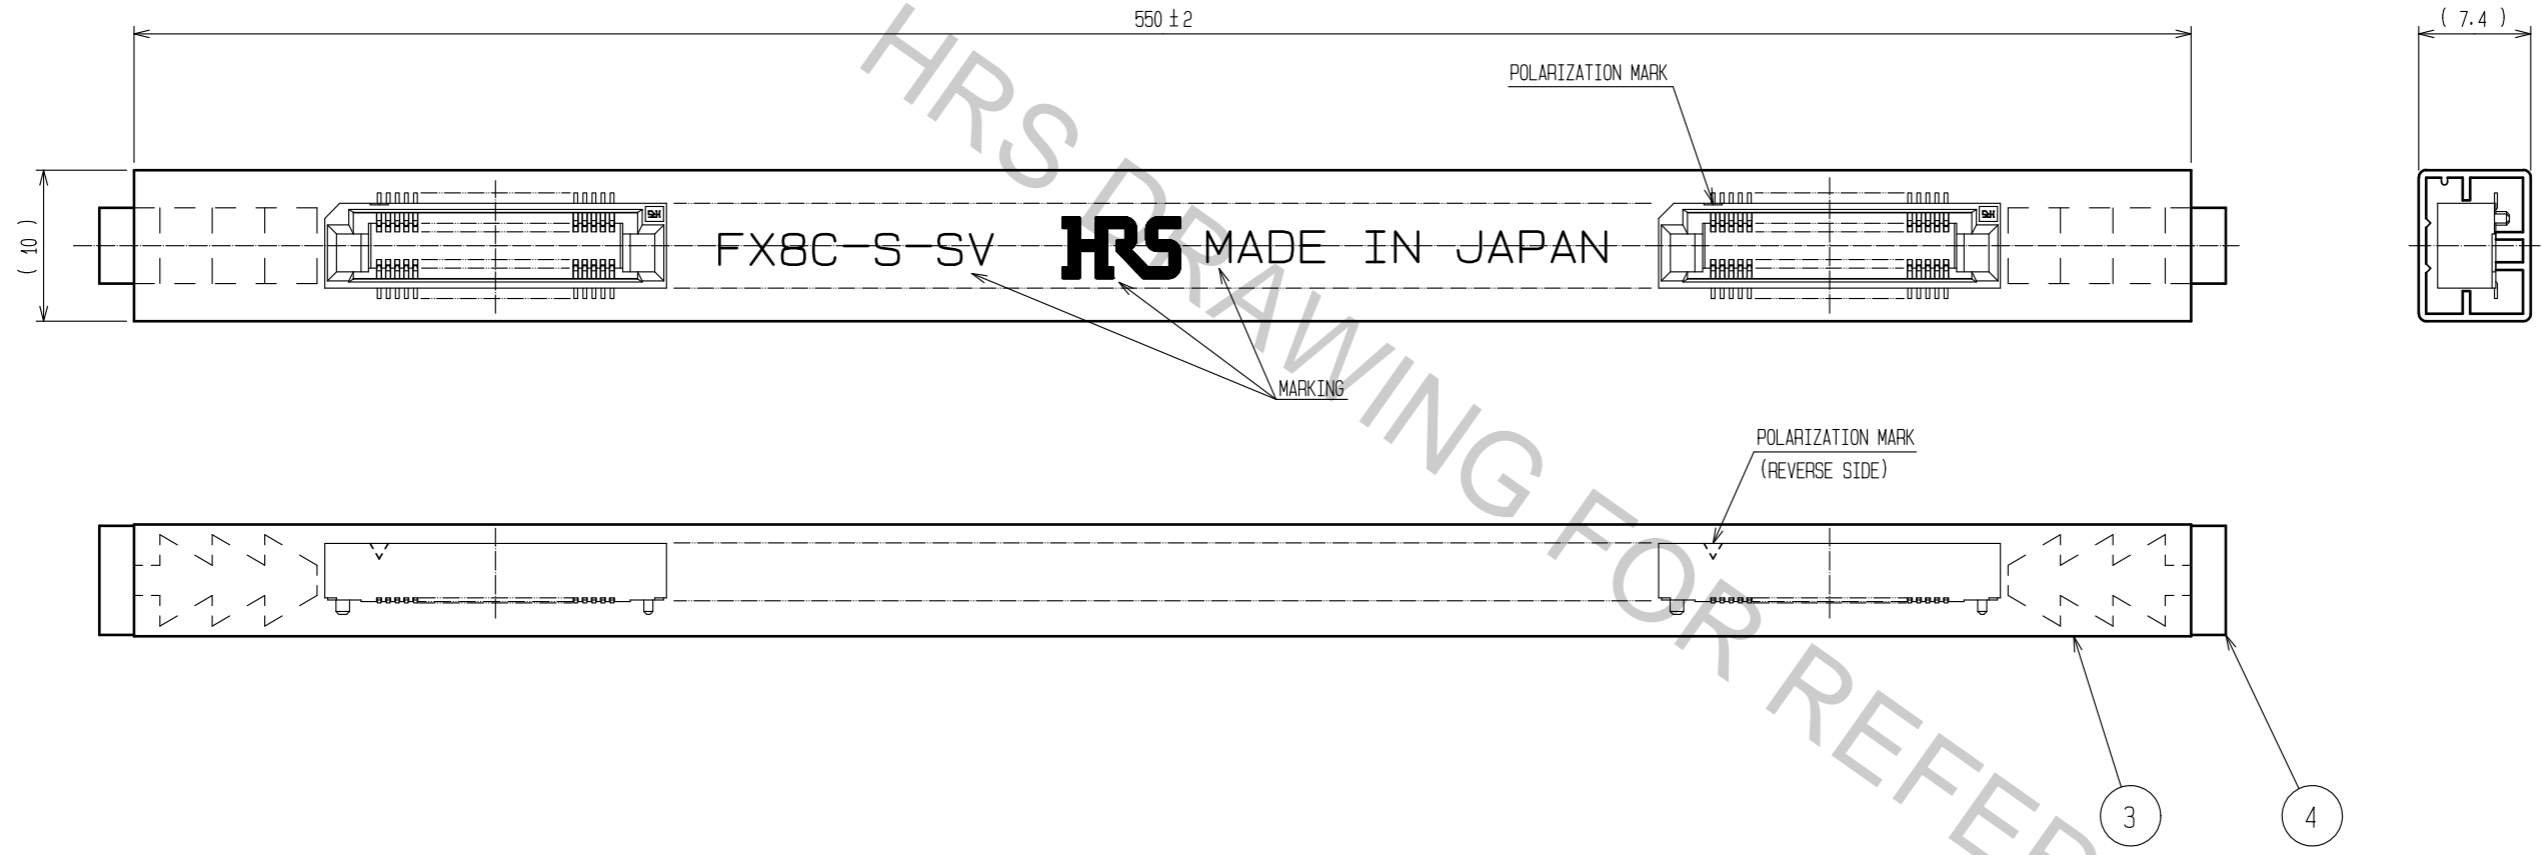

NOTE 1. 1 TUBE : 10 CONNECTORS.  
 2. THE DIMENSES IN PARENTHESSES ARE FOR REFERENCE.

<b>HRS</b>	DRAWING NO.	EDC-150885-68-00
	PART NO.	FX8C-140S-SV(68)
	CODE NO.	CL578-0807-9-68
		△ 2/2

Aug.1.2018 Copyright 2018 HIROSE ELECTRIC CO., LTD. All Rights Reserved.  
 In case that the application demands a high level of reliability, such as automotive,  
 please contact a company representative for further information.