


CONNECTOR SPECIFICATION:

VOLTAGE RATING	250 VAC/VDC
AMPERAGE RATING	max. 4 AMPS
PROTECTION	IP67
OPERATING TEMPERATURE	-20°C TO 105°C
UL CERTIFICATIONS	UL LISTED, FILE NO. E152210
CSA CERTIFICATIONS	CSA CERTIFIED, FILE NO. LR6837

ITEM	COMPONENT	MATERIAL	FINISH
7	LABLE	MYLAR	BLACK/YELLOW
6	O-RING	NITRILE	RED
5	COUPLING NUT	ZINC DIE CAST/ BRASS	BLACK E-COATED/ NICKEL PLATED
4	CONTACT SOCKET	COPPER ALLOY	GOLD OVER NICKEL
3	INSERT	NYLON	BLACK
2	OVERMOLD	PVC	YELLOW
1	CABLE- 22 AWG (26x#36 COPPER STRANDING) 2-6 CONDUCTORS BRAID SHIELD 300V	PVC	YELLOW

FRONT VIEW - FEMALE INSERT WIRING COLOR CODE
VISTA FRONTAL - INSERTO HEMBRA

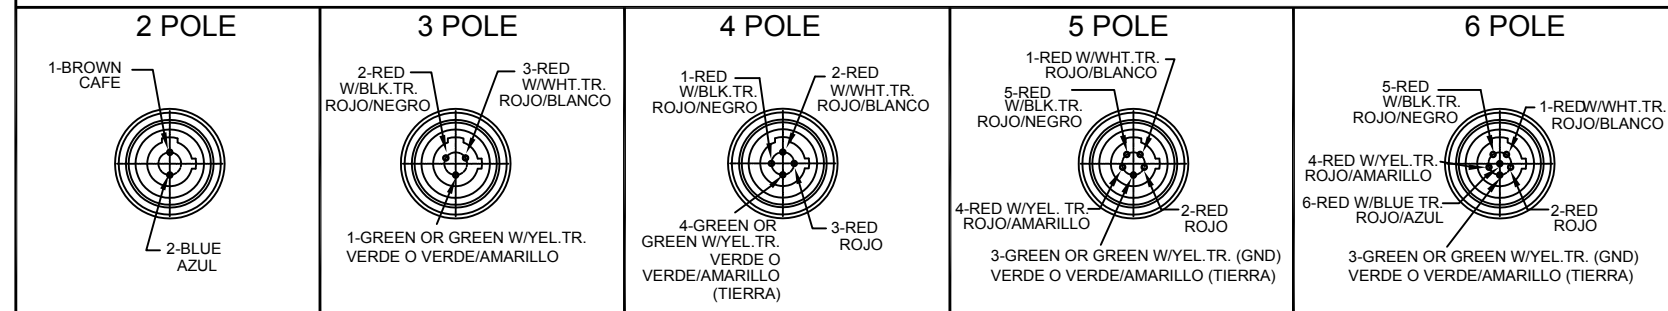

DESCRIPTION EC NO: WEU2010-0417 DRWN: LSTEMMLE CH'KD: NS APPR: FPACHER 08.03.10 2010/03/10	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE		SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION	
	$\nabla = 0$ $\nabla \text{C} = 0$	mm	INCH	IN/MM		1:1	METRIC		
	REV	4 PLACES	\pm ---	\pm ---	DRAWN BY	DATE	MICRO-CHANGE CORDSET 2-6P DUAL KEYWAY FE 90 BRAID SHIELD PVC CABLE		
		3 PLACES	\pm ---	\pm ---	LSTEMMLE	2010/02/05			
2	2 PLACES	\pm ---	\pm .01	CHECKED BY	DATE	MOLEX INCORPORATED DOCUMENT NO. SD-120072-010 SHEET NO. 1 OF 2			
	1 PLACE	\pm 0.3	\pm ---	FP	2010/03/09				
		ANGULAR \pm --- °		APPROVED BY	DATE	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		FPACHER	2010/03/09				

10

9

8

7

6

5

4

3

2

1

POL	MATERIAL NUMBER	ENGINEERING NUMBER	FINISHED LENGTH
2	1200720085	702001D02F060	6.00' +3.50" -0 [1.8M +88.9 -0]

POL	MATERIAL NUMBER	ENGINEERING NUMBER	FINISHED LENGTH
3	1200720250	703001D02F060	6.00' +3.50" -0 [1.8M +88.9 -0]

POL	MATERIAL NUMBER	ENGINEERING NUMBER	FINISHED LENGTH
4	1200720402	704001D02F060	6.00' +3.50" -0 [1.8M +88.9 -0]

POL	MATERIAL NUMBER	ENGINEERING NUMBER	FINISHED LENGTH
5	1200720515	705001D02F060	6.00' +3.50" -0 [1.8M +88.9 -0]

POL	MATERIAL NUMBER	ENGINEERING NUMBER	FINISHED LENGTH
6	1200720595	706001D02F060	6.00' +3.50" -0 [1.8M +88.9 -0]

DESCRIPTION EC NO: WEU2010-0417 DRWN: LSTEMMLE CH'KD: NS APPR: FPACHER 2010/03/10	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE		SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION
	▽ = 0	mm	INCH	IN/MM		1:1	METRIC	
	∇ = 0	4 PLACES ±---	±---	DRAWN BY DATE		MICRO-CHANGE CORDSET 2-6P DUAL KEYWAY FE 90 BRAID SHIELD PVC CABLE		
		3 PLACES ±---	±---	LSTEMMLE 2010/02/05				
		2 PLACES ±---	±.01	CHECKED BY DATE		MOLEX INCORPORATED		
	1 PLACE ±0.3	±---	FP 2010/03/09					
	ANGULAR ± --- °	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		APPROVED BY DATE		DOCUMENT NO.		SHEET NO.
				FPACHER 2010/03/09		SD-120072-010		2 OF 2
				MATERIAL NO. SEE TABLE		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		
				SIZE A3				

10

9

8

7

6

5

4

3

2

1