

SUMMARY



Image is for illustrative purpose only

Wires

Low	0
High	0
Coax	0
Triax	0
Quad	0
Fiber	1
Fluidic	0

Download

[Request a quote](#)

[Catalog](#)

Series	3K
Termination type	Hybrid contacts
IP rating	68
Cable Ø	12.10 - 12.80 mm
Matching parts	EGA.3K.92X.CLL
Status	
Alternative part	

TECHNICAL DETAILS

Mechanics

Shell Style/Model	FG*: Straight plug with oversize cable collet
Keying	2 keys (alpha=30, plug: male contacts, receptacle: female contacts)
Housing Material	Brass (chrome plated) shell and collet nut, nickel plated brass latch sleeve and mid pieces
Cable Fixing	K12: 12.1 - 12.8 mm
Variant	

Performance

Configuration	3K.92X : 1 FO Type F2, 22 LV
Insulator	L: PEEK (UL 94 / V-0/3.2, depends on material thickness)
Rated Current	5 Amps

Specifications


Contact Type:	Solder
Fiber Optic Contact:	Type F2 (must be ordered separately)
Vtest (contact-shell):	700 V (AC), 990 V (DC)
Vtest (contact-contact):	800 V (AC), 1130 V (DC)

Others

Endurance (Shell): 5000 mating cycles
 Temp (min / max): -55°C / +200°C
 Humidity (max): <=95% [at 60 deg C / 140 F]
 Vibration: 15 g [10 Hz - 2000 Hz]
 Shock Resistance: 100 g [6 ms]
 Salt Spray Corrosion: >1000 hr
 Climatical Category: 50/175/21
 Shielding (min): 95 dB (10 MHz)
 Shielding (min): 80 dB (1 GHz)
 IP Rating: 68

DRAWINGS

Draws

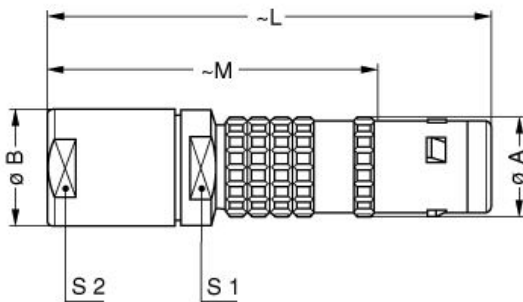

Dimensions

	A	B	L	M	S1	S2
mm.	19	22	85	65	19	19
in.	0,75	0,87	3,35	2,56	0,75	0,75

RECOMMENDED BY LEMO

Tools

Spanner wrench: DCD.3E.030.PA150

Cables