

CUSTOMER PRINT

PART NUMBER: CA16280XSXXX90


NOTES:

1. FINISHED CABLE ASSEMBLY TO BE COILED
2. OVERMOLD BOOT MATERIAL: PVC, BLACK
3. ELECTRICAL TEST: 100% CONTINUITY


ASS'Y P/N	NO. OF POSITION	"X" DIM.
CA162802S07990	2 POS.	6 FT. 7 IN. ± 2 IN. [2M]
CA162803S07990	3 POS.	
CA16280XSXXX90		

CABLE LENGTH IN "INCHES"

NO OF POSITIONS




FACE VIEW
P/N: CA162802SXXX90



FACE VIEW
P/N: CA162803SXXX90

O-RING
MAT'L: RUBBER

END "A"

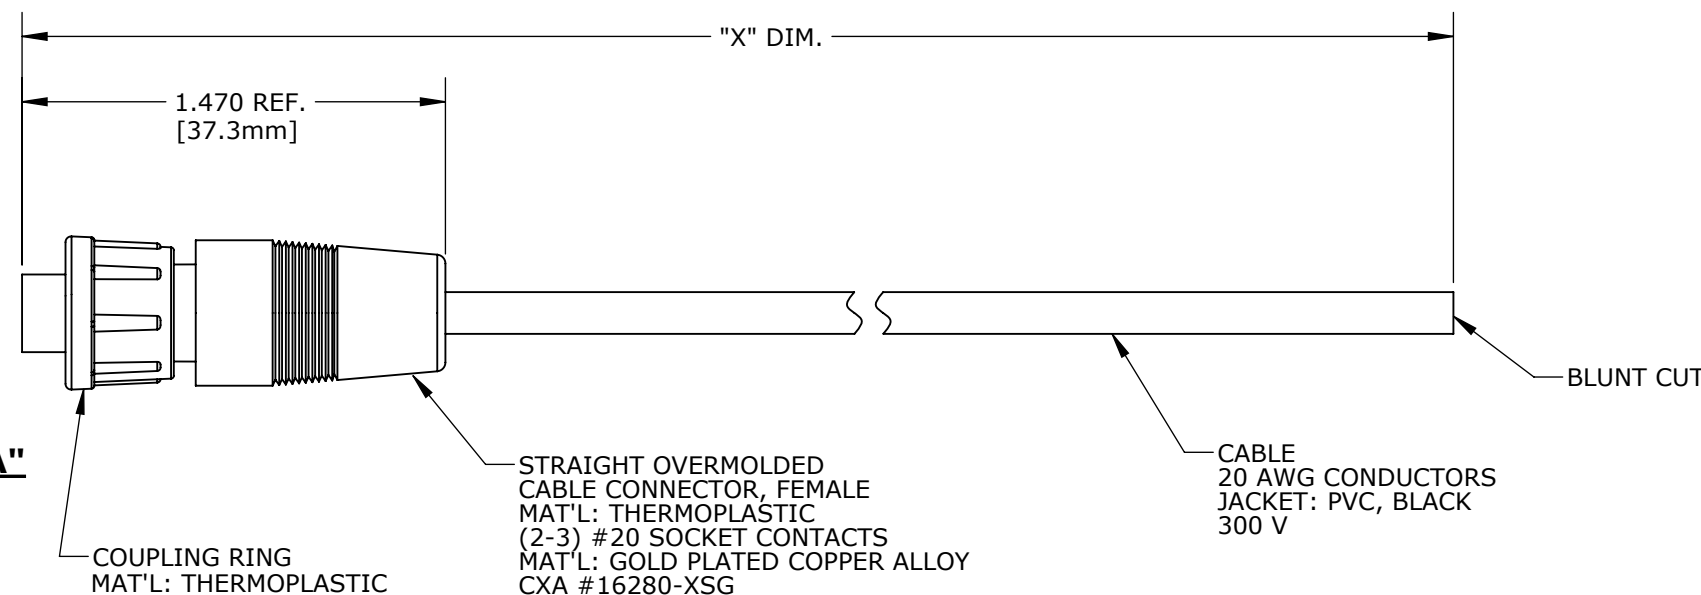

COUPLING RING
MAT'L: THERMOPLASTIC

STRAIGHT OVERMOLDED
CABLE CONNECTOR, FEMALE
MAT'L: THERMOPLASTIC
(2-3) #20 SOCKET CONTACTS
MAT'L: GOLD PLATED COPPER ALLOY
CXA #16280-XSG

CABLE
20 AWG CONDUCTORS
JACKET: PVC, BLACK
300 V

BLUNT CUT

DIMENSIONS IN BRACKET [] ARE METRIC.

CUSTOMER APPROVAL

THIS DOCUMENT CONTAINS CONFIDENTIAL INFORMATION PROPRIETARY TO CONXALL CORPORATION. ANY REPRODUCTION, DISCLOSURE, OR USE OF THIS DOCUMENT /INFORMATION IS EXPRESSLY PROHIBITED UNLESS AUTHORIZED IN WRITING BY CONXALL CORPORATION.

APPROVED BY: _____

DATE: _____

RoHS COMPLIANT

ASSY P/N	CABLE	COLOR CODE END "A"		
CA162802SXXX90	2/20 AWG O.D. 0.215 REF	COLOR CODE		
		POS. 1	POS. 2	
		BLK	WHT	
CA162803SXXX90	3/20 AWG O.D. 0.220 REF	WIRE COLOR CODE		
		POS. 1	POS. 2	POS. 3
		BLK	WHT	GRN

REV.	INIT.	DATE	DESCRIPTION
A	AN	11-08-16	DRAWING CREATED PER DOR 16-7663JP

ALL INFORMATION ILLUSTRATED IS THE PROPERTY OF "CONXALL CORPORATION." UNAUTHORIZED DUPLICATION OR DISTRIBUTION OF THIS DOCUMENT IS PROHIBITED.	ORIG. DRAWN BY: AN DATE: 11-07-16 CHECKED BY:	601 E. WILDWOOD VILLA PARK, IL 60181
ALL UNITS ARE IN FEET, INCHES, FRACTION OF INCHES AND DECIMALS.	APPROVED BY: SCALE: NTS SIZE: B SHEET: 1 OF 1 FILE: CA16280XSXXX90 DIRECTORY: SLW	
TITLE: CABLE ASSEMBLY (2-3) #20 SOCKET CONTACTS MICRO-CON-X CUSTOMER: STANDARD PRODUCT PART NUMBER: CA16280XSXXX90		REV A