
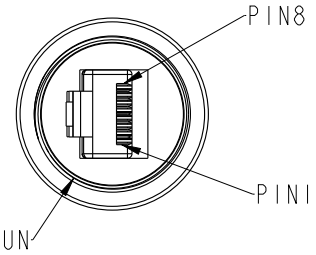
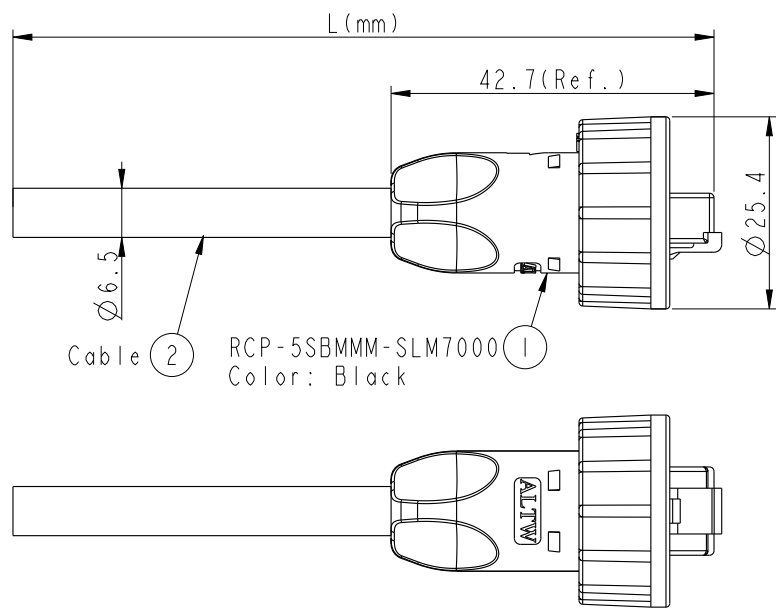


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION



Drain Wire	接地線	Shield	
Brown	棕	8	Twist
White/Brown	白/棕	7	
Green	綠	6	Twist
White/Blue	白/藍	5	
Blue	藍	4	Twist
White/Green	白/綠	3	
Orange	橘	2	Twist
White/Orange	白/橘	1	
Wire Color		Plug	
Pin Out			

RCP-5SBMMM-SLM7BXX
 T
 XX: 01~99Meters
 01: 01Meters
 02: 02Meters
 |
 99: 99Meters
 Cable Length(L):01~99Meters

Note:
 * \varnothing Important Dimension
 * Waterproof Rate: IP67
 * Plug: 8P8C, Gold Plated, Shielded
 * Screw Nut: Nylon+GF, Black
 * Cable: CAT5E FTP 24#*4P+D
 +Al/My(UV Resistant) OD=6.5mm, Black.
 * Cable Length Tolerance: 01M: ±40mm
 02~05M: ±60mm
 06~10M: ±100mm
 11~30M: ±200mm
 30~99M: ±500mm

UNIT:mm		TITLE RJ45, C Size		Amphenol LTW 安費諾亮泰企業股份有限公司	ITEM NO	DRAWN BY Tom	DATE 2014-08-29
		SCALE 1:1	SIZE A4		SHEET 1 OF 1	DWG NO RCP-5SBMMM-SLM7BXX	CHECKED BY Jerry
TOLERANCE .X ±0.25 .XX ±0.1 .XXX ±0.05 ANGLES ±1°		REV. A	WC-REV. A.2	\varnothing : Inspection item	CUSTOMER ALTW	APPROVED BY Victor	DATE 2014-08-29