

Fig.1 Recommended spacer height (Free)

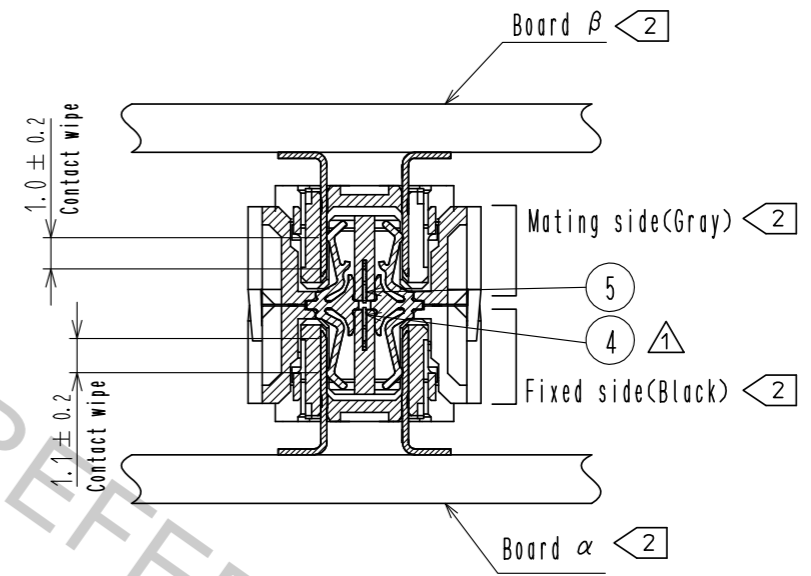


Fig.2 Mating cross section (Free)

Table.1 Stacking height and connector combinations ◀ 1

Board distance (Stacking height)	Header connector of Board α	Interposer	Header connector of Board β	Recommended spacer height(L) ◀ 3
8mm	FX10A-120P-SV(**)	FX10-120IP-36Q-8H(O3)	FX10A-120P-SV(**)	8 ± 0.127mm
9mm	FX10A-120P-SV1(**)		FX10A-120P-SV(**)	9 ± 0.127mm
10mm	FX10A-120P-SV1(**)		FX10A-120P-SV1(**)	10 ± 0.127mm

Table.2 Pin configuration of Interposer ◀ 4

Row A Pin No.	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60
Pin configuration	G1	S	S	G1	S	S	G1	S	S	G1	S	S	G1	S	S	G1	S	S	G1	S	S	G1	S	S	G1	S	S	G1	SE	SE	SE	SE	G2	S	S	G2	S	S	G2	S	S	G2	S	S	G2	S	S	G2	S	S	G2	S	S	G2	S	S	G2	S	S	G2
Row B Pin No.	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60
Pin configuration	G1	S	S	G1	S	S	G1	S	S	G1	S	S	G1	S	S	G1	S	S	G1	S	S	G1	S	S	G1	S	S	G1	SE	SE	SE	SE	G2	S	S	G2	S	S	G2	S	S	G2	S	S	G2	S	S	G2	S	S	G2	S	S	G2						

S: Signal for Differential SE: Signal for Single-ended G1: Common ground 1 G2: Common ground 2

- Note.
- 1 The header connectors are decided by board distance (stacking height). Connector combination is shown in Table 1.
 - 2 Fixed side (Black side) of interposer should be mated with header mounted on board α.
Mating side (Gray side) should be mated with header mounted on board β.
 - 3 Spacers are required to support the PWB's and protect the SMT solder joints.
Recommended spacer height is shown in Table 1.
 - 4 Pin configuration is shown in Table 2.
This product consists of 36 Differential pairs ,8 Single-ended lines and 40 ground lines.
 - 5 Lot No. shall be marked on the indicated position.
 - 6 50pcs of this product are packed in soft tray. See Fig.3 for details.

3	Copper Alloy	Ni1.5µm+Au0.76µm	6	PS	(Tray)		
2	LCP(Black)	UL94V-0	5	Copper Alloy	Ni1µm		
1	LCP(Gray)	UL94V-0	4	Copper Alloy	Ni1µm		
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS		
UNITS mm		SCALE 2 : 1	COUNT 3	DESCRIPTION OF REVISIONS DIS-F-00002513	DESIGNED AS. MATSUZAWA	CHECKED MK. EZAKI	DATE 17. 07. 14
		HIROSE ELECTRIC CO., LTD.		APPROVED : TM. MATSUO 17. 07. 04	DRAWING NO. EDC-361675-03-00		
				CHECKED : MK. EZAKI 17. 07. 04	PART NO. FX10-120IP-36Q-8H(O3)		
				DESIGNED : AS. MATSUZAWA 17. 07. 04	CODE NO. CL608-0015-8-03		
				DRAWN : XINGYU CHENG 17. 07. 04	1/2		

Aug.1.2018 Copyright 2018 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
 In case that the application demands a high level of reliability, such as automotive,
 please contact a company representative for further information.


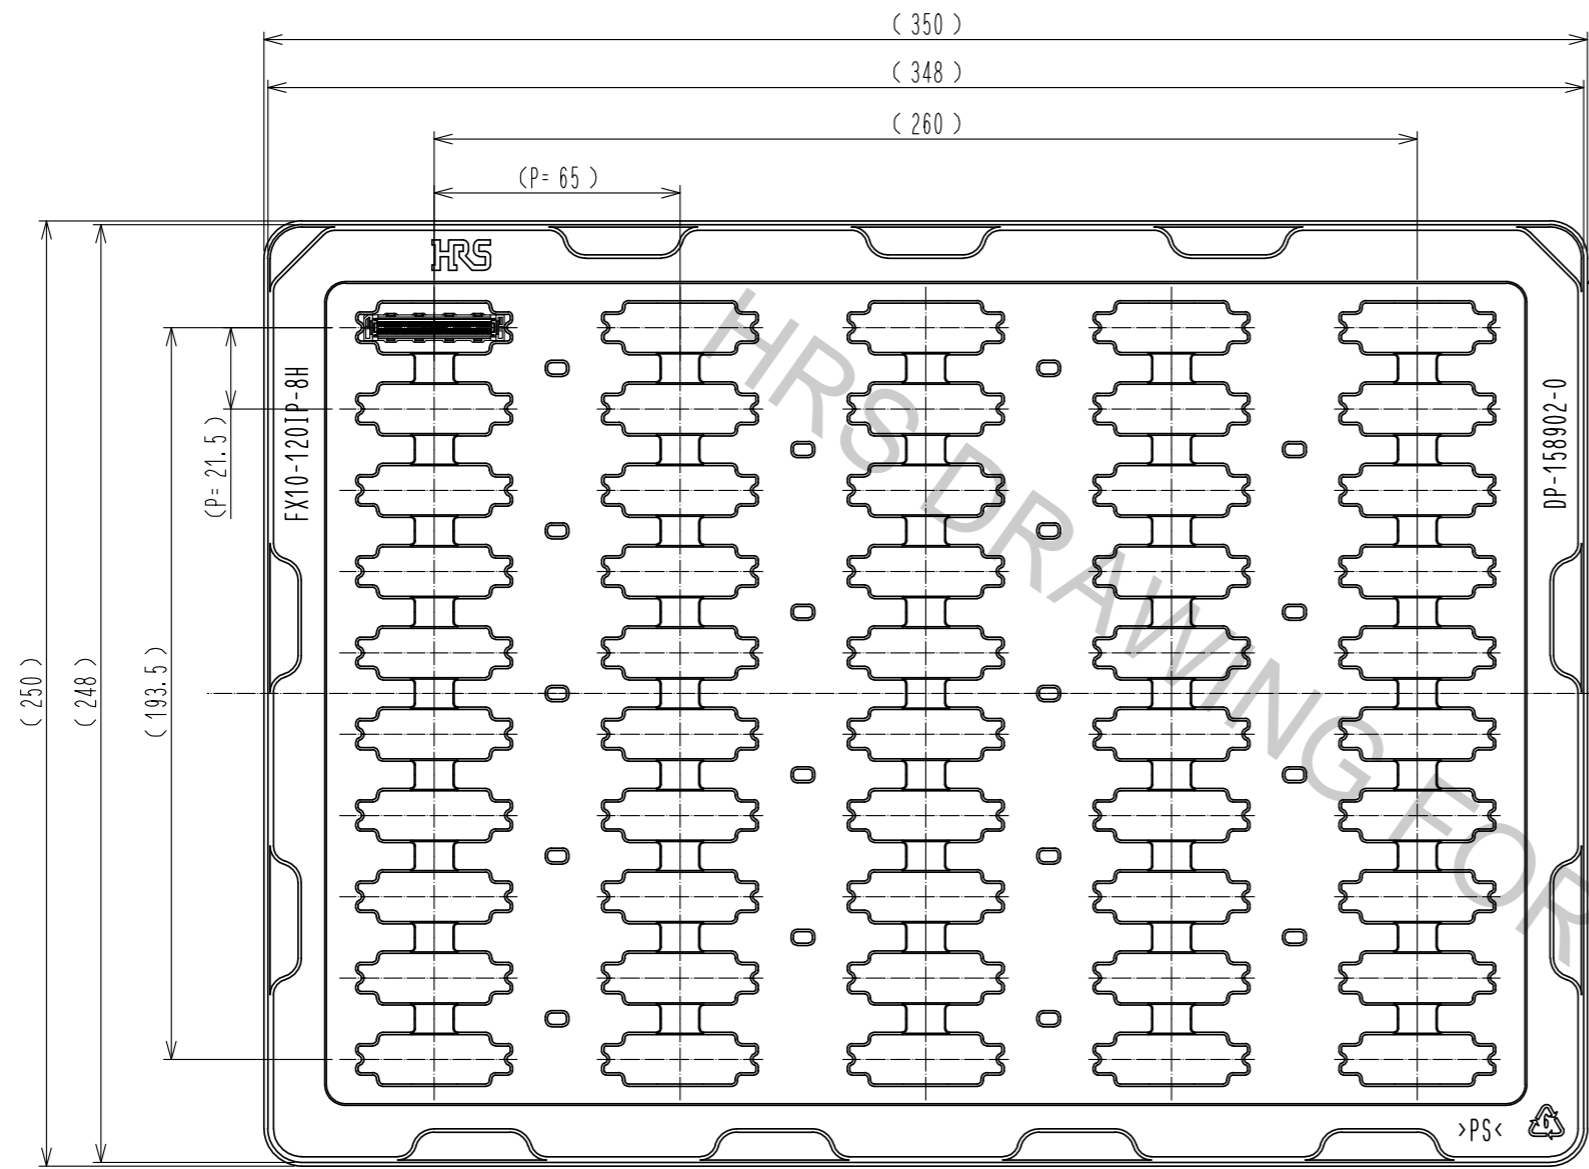


Fig.3 Drawing for packing (1:2) ◁6



Fig.4 Stacked tray drawing (1:2)

HRS	DRAWING NO.	EDC-361675-03-00
	PART NO.	FX10-120IP-36Q-8H(C03)
	CODE NO.	CL608-0015-8-03

2/2