
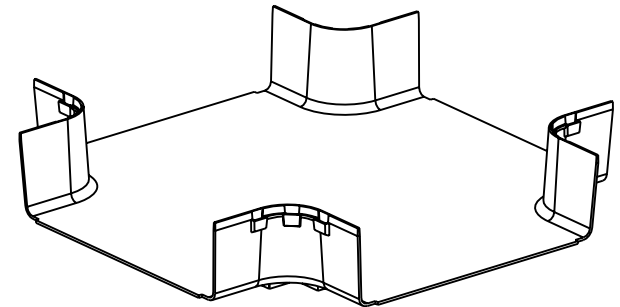


NOTES:

1. SEE CURRENT CATALOG FOR ADDITIONAL PART SUFFIXES TO INDICATE COLOR AND/OR PACKAGE QUANTITY.
2. THE FIBERRUNNER 12x4 FOUR-WAY CROSS FITTING IS DESIGNED WITH A MINIMUM 2" (50.8) BEND RADIUS TO PROTECT FIBER OPTIC CABLES.
3. DIMENSIONS IN PARENTHESES ARE IN METRIC.

PANDUIT PART NUMBER	WEIGHT
FRFWC12X4	3.35 LB/EACH (1520g/EACH)

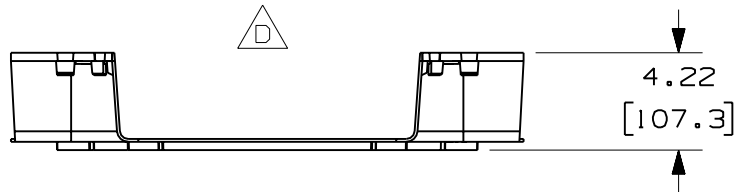

ENG. REF.: D37617BK_DC_FRFWC12X4_01.prt

CAD FILENAME/LAYERS **FRFWC12X4.pdf**

PANDUIT CORP TINLEY PARK, ILLINOIS
FIBERRUNNER 12x4 FOUR-WAY CROSS FITTING (FRFWC12X4)
 CUSTOMER DRAWING

UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE:
 (.X) ± (.XXX) ±
 (.XX) ± .03 (.8) ANGLES ±

UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE GIVEN IN INCHES, THIRD ANGLE PROJECTION.

-	-----	---	---	E. REVISED GENERAL NOTES	-----	--	--													
-	-----	---	---	D. REVISED DRAWING VIEWS C. REVISED PART WEIGHT	-----	--	--													
1	6-28-06	DTP	RN	B. REVISED DRAWING TITLE A. REVISED CAD FILENAME	37617-70	RN	RN													
R	1-2-01	JHNU	SMF	RELEASED TO PRODUCTION	37617-70	HIW	HIW													
REV	DATE	BY	CHK	DESCRIPTION	ECN	R	CUST	SUP	GMBH											

DRAWN BY	JHNU	MAT'L:	ABS	SCALE	NONE
DATE	1-2-01			DRAWING NO.	37617-70
CHK'D	HIW			DWG SIZE	A