
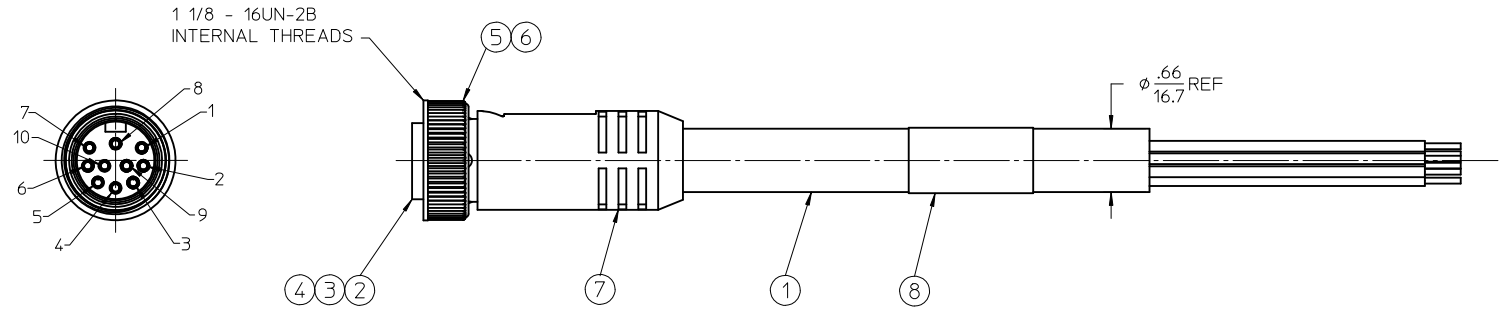
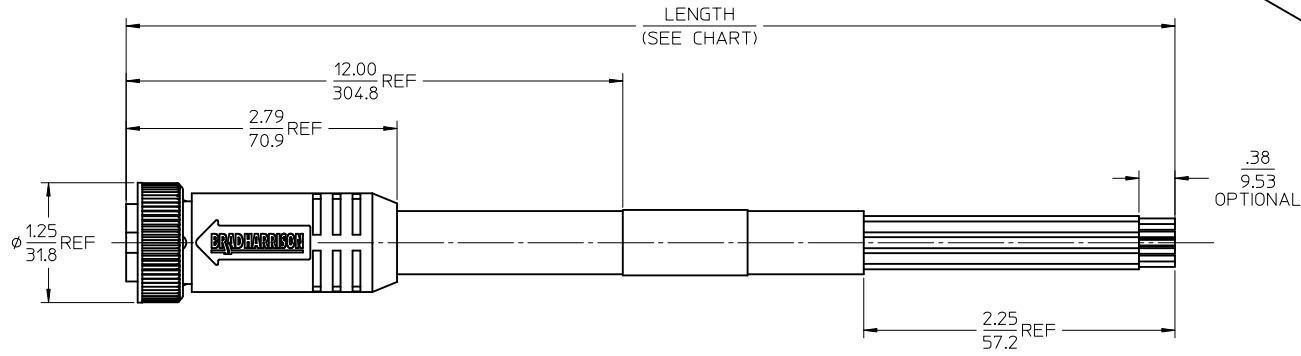


PART NUMBER	ENGINEERING NO.	LENGTH
1300080023	301000A01F030	3' 0" +1.75 - 0 [ .9M +44.5 - 0 ]
1300080025	301000A01F060	6' 0" +2.19 - 0 [ 1.8M +55.6 - 0 ]
1300080028	301000A01F120	12' 0" +3.50 - 0 [ 3.7M +88.9 - 0 ]
1300080033	301000A01F200	20' 0" +6.50 - 0 [ 6.1M +165.1 - 0 ]

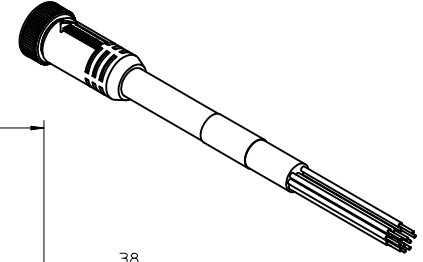

P1	
1	ORANGE
2	BLUE
3	WHITE/BLACK TRACE
4	RED/BLACK TRACE
5	GREEN/BLACK TRACE
6	ORANGE/BLACK TRACE
7	RED
8	GREEN/YELLOW (B)
9	BLACK
10	WHITE

WIRING DIAGRAM

- NOTES:
1. MATERIAL: SEE TABLE
  2. FINISHES: SEE TABLE
  3. CABLE ASSEMBLIES ARE BAGGED SEPARATELY IN POLY BAGS WITH BARCODE LABEL ATTACHED TO OUTSIDE OF BAG
  4. WRAP LABEL IS MARKED WITH P/N, DATE CODE VOLTAGE & AMPERAGE
  5. MATES WITH: MINI CHANGE, C-SIZE 10 POLE RECEPTACLE
  6. ELECTRICAL SPECIFICATIONS:  
VOLTAGE RATING: 600V  
CURRENT RATING: 7 AMPS
  7. ASSEMBLY IS RoHS COMPLIANT

ITEM	QTY.	DESCRIPTION	MATERIAL	FINISH
8	1	LABEL	PLASTIC FILM	BLACK/YELLOW
7	1	OVERMOLD	PVC	YELLOW
6	1	COUPLING NUT	ZINC DIE CAST	BLACK
5	1	FRICION RING	NYLON	NATURAL
4	10	SOCKET CONTACT	BRASS	GOLD PLATED
3	10	SOCKET SLEEVE	STAINLESS STEEL	
2	1	INSERT, FEMALE, 10 POLE	PVC	YELLOW
1	1	#16/10 CABLE, ST00W/ST	PVC JACKET	YELLOW
ITEM	QTY.	DESCRIPTION	MATERIAL	FINISH

GRN TO GRN/YELLOW  
EC NO: MNA2011-0291  
DRAWN: VOU 2010/11/29  
CHKD: RSTONE 2010/11/30  
APPR: JF MURPHY 2011/01/24

DESCRIPTION

QUALITY SYMBOLS  
 =0  
 =0

GENERAL TOLERANCES (UNLESS SPECIFIED)	
	IN/MM
4 PLACES ±	--- ± ---
3 PLACES ±	--- ± .005
2 PLACES ±	--- ± .010
1 PLACE ±	0.3 ± .020
ANGULAR ±1/2°	

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DIMENSION STYLE: IN/MM

SCALE: 1:1

DESIGN UNITS: INCH

THIRD ANGLE PROJECTION

TITLE: MINI CHANGE CORD ASSY C-SIZE, 10 POLE

MOLEX MOLEX INCORPORATED

DOCUMENT NO. SD-130008-013

SHEET NO. 1 OF 1

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION