

**MICRO SWITCH**  
a Honeywell Division

FED. MFG. CODE 91 929

SWITCH - BASIC

CATALOG LISTING  
V3L-3053

CQ-X1864

CATALOG LISTING  
V3L-3053  
PAGE 1 OF 1

ISSUE  
2

REPLACES X100985-V3L

RELEASE NO. PR-22260

CHECK

REVISIONS  
A 0005105  
KSR  
APR 04  
27 APR 04

AK



CHECK

CHECK

28 JUN 96

DCS

DDM/CAD  
DRAWN

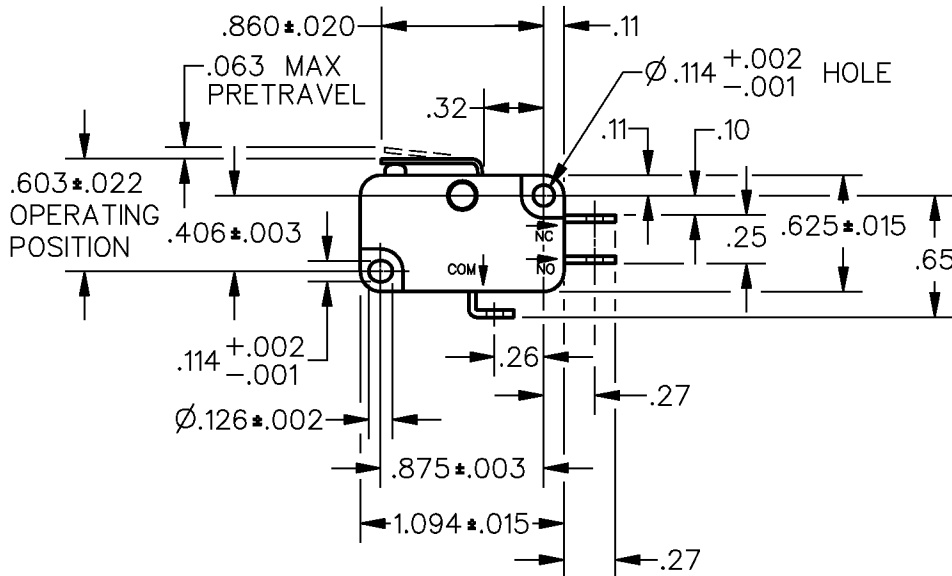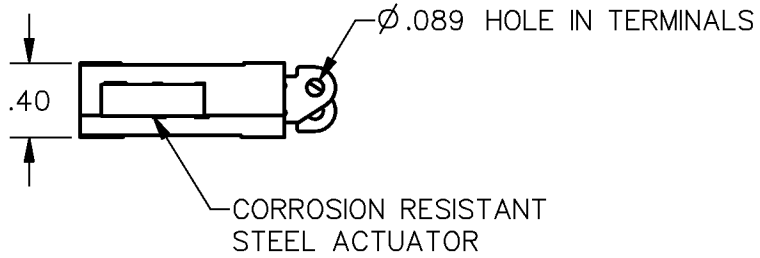


NOTES

- 1 - SWITCH MATERIALS WILL WITHSTAND TEMPERATURE OF 300°F
- 2 - CAUTION: OVERTRAVEL FORCE ON LEVER MUST NOT RESULT IN AN OVERTRAVEL FORCE ON PLUNGER EXCEEDING FIVE POUNDS
- 3 - TERMINALS ARE PLATED FOR SOLDERING

ANSI Y14.5M-1982 APPLIES

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION



CHARACTERISTICS	ELECTRICAL DATA	SCALE FULL	DO NOT SCALE PRINT
		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE	
OPERATING FORCE --- 159 GRAMS MAX	CONTACT ARRANGEMENT S P D T  L215 15.1A 1/2HP 125, 250 or 277 VAC 1/2A 125 VDC, 1/4A 250 VDC 5A 120 VAC "L"	ONE PLACE (.0)	±.030
RELEASE FORCE --- 17 GRAMS MIN		TWO PLACE (.00)	±.015
DIFFERENTIAL TRAVEL --- .014 MAX		THREE PLACE (.000)	±.005
OVERTRAVEL --- .036 MIN		ANGLES	±
RELEASE TRAVEL --- .008 MIN		WEIGHT	

