

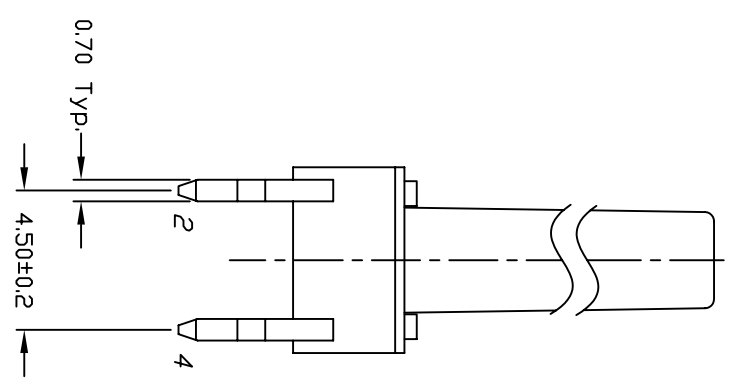


RECOMMEND P.C.B. LAYOUT

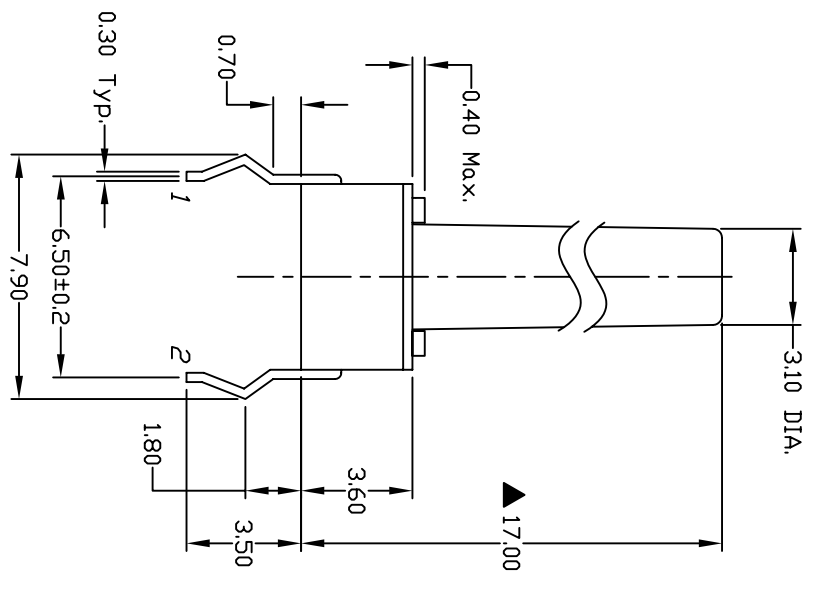

CIRCUIT: SPST  
CONTACT CONFIGURATION

- NOTES:
1. ALL DIMENSIONS IN MM
  2. GENERAL TOLERANCE: 0.0=±0.4  
0.00=±0.25
  3. TERM. NOS. FOR REF. ONLY
  4. RATING: 50mA, @12V DC
  5. TRAVEL: 0.25±0.1mm
  6. OPERATING FORCE: 250±50gf
  7. CONTACT RESISTANCE: 100m ohms Max.
  8. ELECTRICAL LIFE: 100,000 CYCLES MIN.
  9. INSULATION RESISTANCE: 100M ohms min.
  10. DIELECTRIC STRENGTH: 250V RMS MIN.
  11. OPERATING TEMP.: -20°C to -70°C
  12. DESIGNATE MAJOR DIMENSIONS.
  13. 2002/95/EC (ROHS) COMPLIANT

B	17262	FIXED DRAWING, NOTES	5/8/07	TN
---	-------	----------------------	--------	----

A	10034	RELEASED FOR PRODUCTION		
---	-------	-------------------------	--	--

REV.	ECN No.	DESCRIPTION	DATE	CHKD
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED				

TITLE

TL1105LF250Q



SCALE	DATE	DR	DWG	REV
4:1	5/8/07	TN	P010025	B