





THIS DRAWING AND THE SPECIFICATIONS CONTAINED HEREIN ARE CONFIDENTIAL AND PROPRIETARY. THEY ARE THE PROPERTY OF AVID THERMAL TECHNOLOGIES INC. AND SHALL NOT BE REPRODUCED OR COPIED OR USED IN WHOLE OR IN PART AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEMS WITHOUT WRITTEN PERMISSION. THIS IS AN UNPUBLISHED WORK PROTECTED UNDER THE FEDERAL COPYRIGHT LAWS, 1995



(\*) CRITICAL DIMENSION

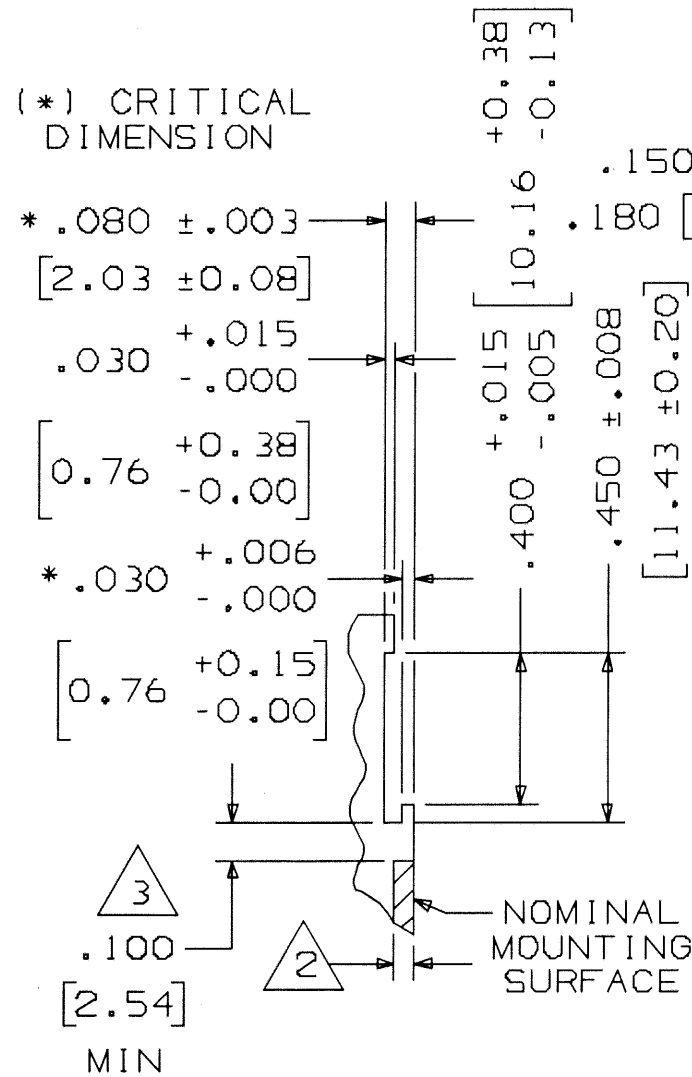

RECOMMENDED EXTRUSION SLOT DETAILS

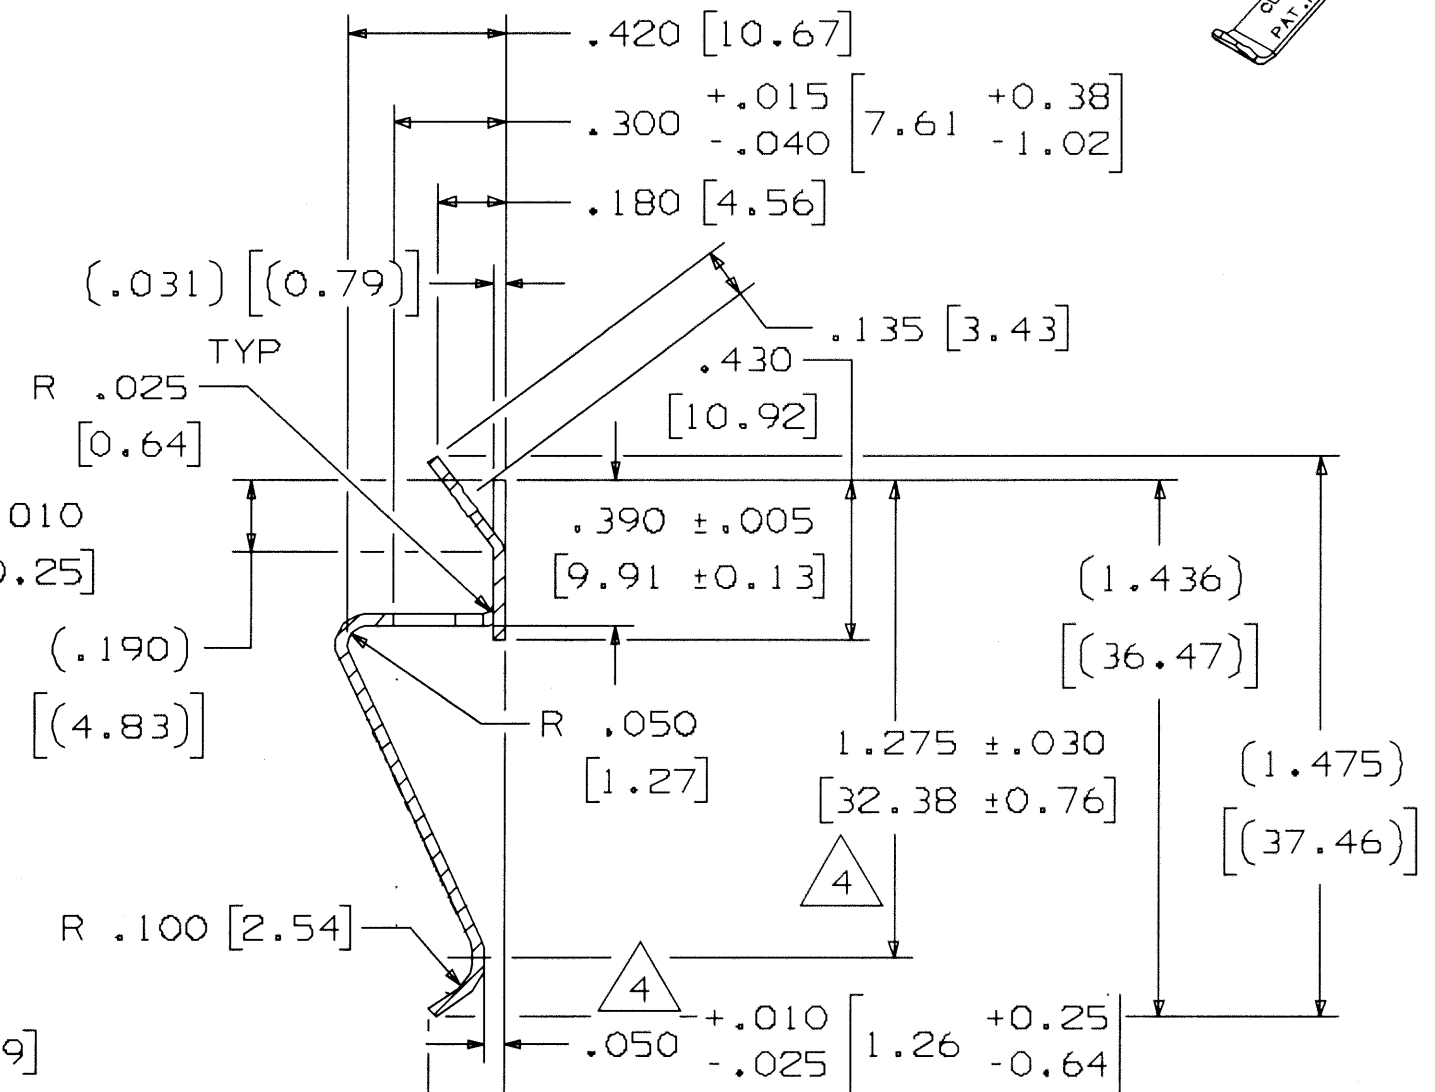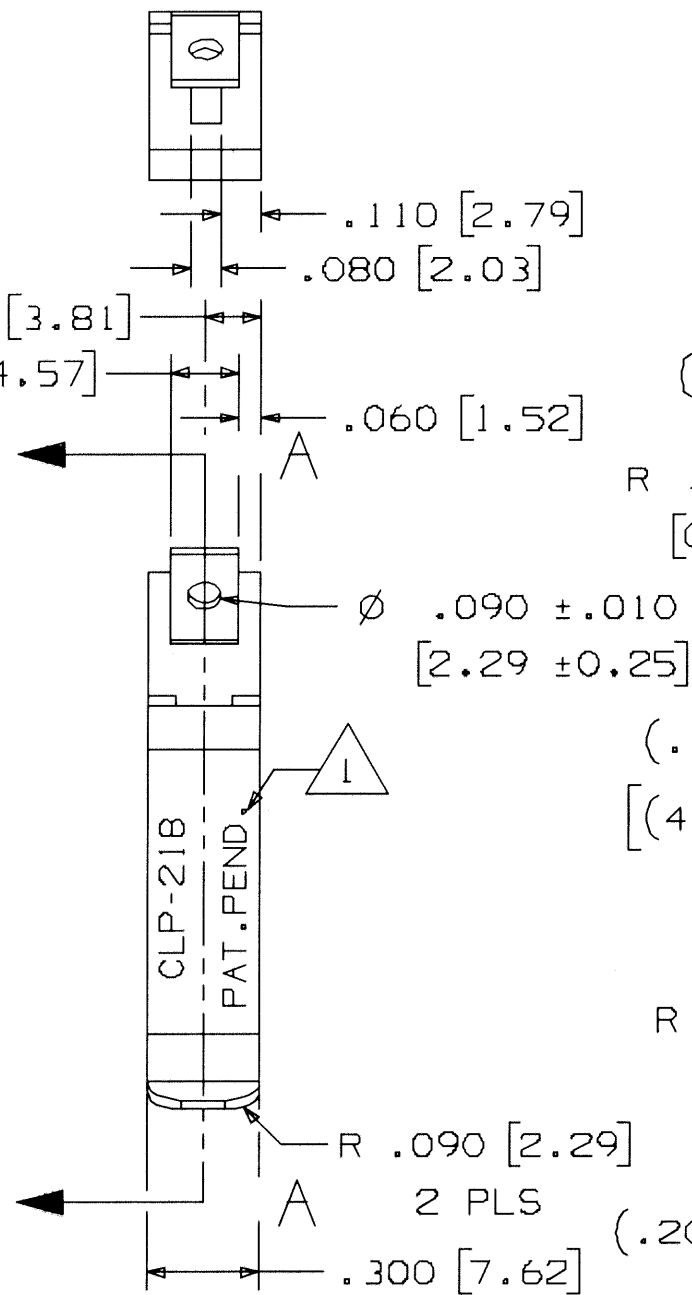

SECTION A - A

NOTES:

- 1 MARK PART "CLP-218" AND "PAT.PEND." TO BE STAMPED APPROX. AS SHOWN. LETTERING DIRECTION OPTIONAL.
- 2 WHERE A CONDITION SUCH AS A THICK INSULATOR (GREATER THAN .010 [.25]) IS REQUIRED A RECESSED AREA SUCH AS SHOWN WITH HATCHING MUST BE DESIGNED INTO THE EXTRUSION. DEPTH IS IN DIRECT RELATION TO THE INSULATOR THICKNESS.
- 3 WHEN A RECESSED AREA IS REQUIRED THIS IS A MINIMUM REQUIREMENT FOR EXTRUDING PURPOSES. THIS IS ALSO RECOMMENDED FOR OTHER AREAS AROUND THE SLOT.
- 4 1.275 +/- .030 [32.38 +/- .76] DIMENSION IS TO THE TANGENT POINT OF THE CLIP CREATED BY THE CLIP RADIUS AND THE .050 +.010 -.025 [1.26 +.25 -.64] DIMENSION.

FINISH	U/O
MAT'L	037243
TOLERANCE	UNLESS NOTED
.XX	= ±.015 [±.38]
.XXX	= ±.010 [±.25]
ANGULAR	± 3'

D	04/25/03	RELEASE PER ECN #015569	JB
REV.	DATE	DESCRIPTION	CHK'D
		80 COMMERCIAL ST. CONCORD, N.H. 03301	
		DRAWING NO. 033474	
STANDARD DESCRIPTION		THM, 19820 REV G	
DATE	DRAWN	ENGR.	APP'D
04/24/03	P.C.	JB	JB
SHEET			SCALE
SHEET			2.000