


PowerPAD-24/PowerSOIC-24 to DIP-28 SMT Adapter (1.27 mm pitch, 300 mil body)

| REF. | DIMENSIONS | | | | | |
|------|------------|-------|------|--------|-------|------|
| | mm | | | inches | | |
| | MIN. | TYP. | MAX. | MIN. | TYP. | MAX. |
| A | | 7.65 | | | | |
| B | | 2.00 | | | | |
| C | | 0.70 | | | | |
| B2 | | 3.30 | | | | |
| C2 | | 3.90 | | | | |
| D | | 0.57 | | | | |
| D2 | | 2.175 | | | | |
| E | | 1.27 | | | | |
| F | | | | | 0.600 | |
| G | | | | | 0.100 | |
| H | | | | | 0.025 | |

Top View (SMT Footprint)

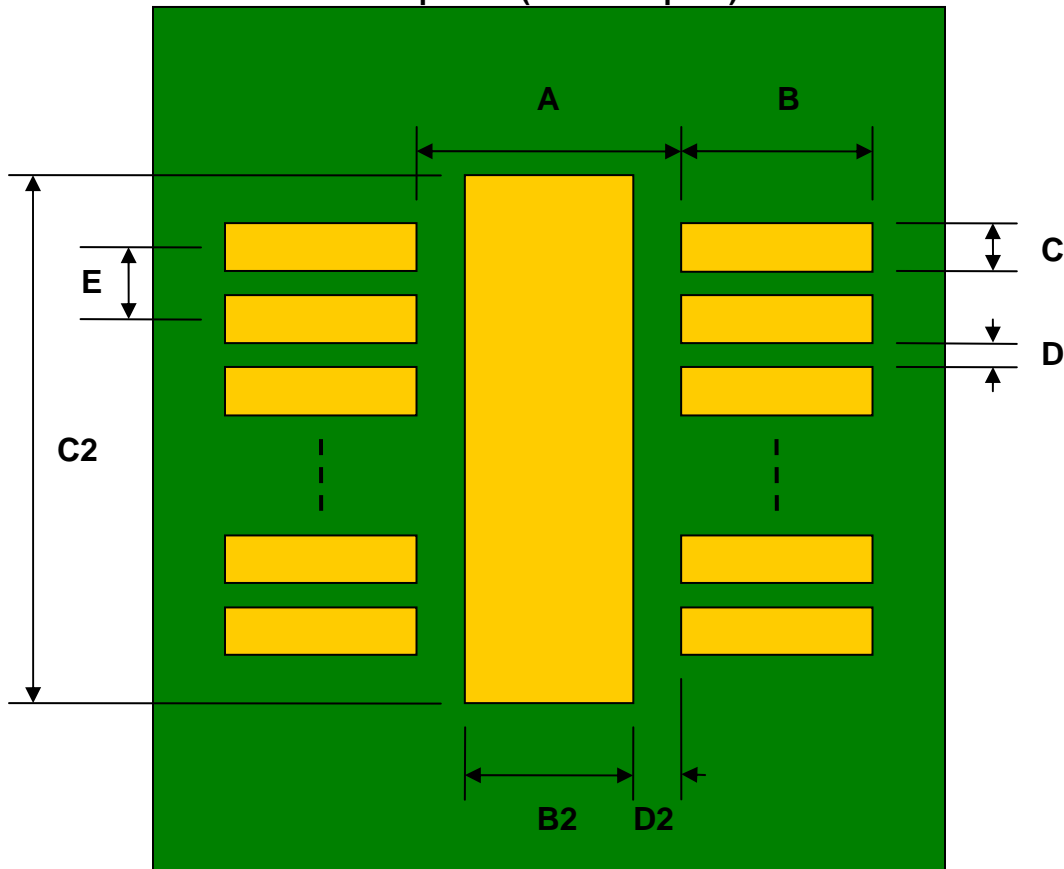

(Representative drawing only - not to scale)

Bottom View (DIP Pins)



(Representative drawing only - not to scale)

Side View (DIP Pins)



(Representative drawing only - not to scale)