





THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

| PANDUIT PART NUMBER | WEIGHT                      |
|---------------------|-----------------------------|
| FRFWC12X4W4         | 1.99 LB/EACH<br>(903g/EACH) |



**NOTES:**

1. SEE CURRENT CATALOG FOR ADDITIONAL PART SUFFIXES TO INDICATE COLOR AND/OR PACKAGE QUANTITY.
2. THE FIBERRUNNER 12x4 FOUR-WAY CROSS WITH 4" EXITS IS DESIGNED WITH A MINIMUM 2" (50.8) BEND RADIUS TO PROTECT FIBER OPTIC CABLES.
3. DIMENSIONS IN PARENTHESES ARE IN METRIC.

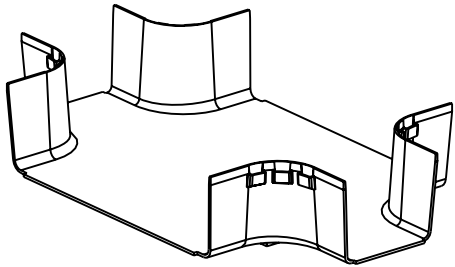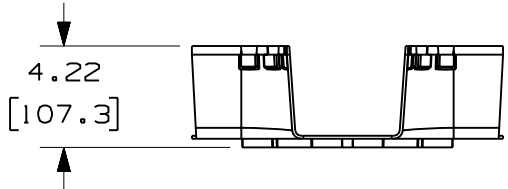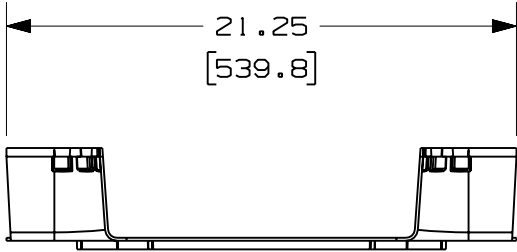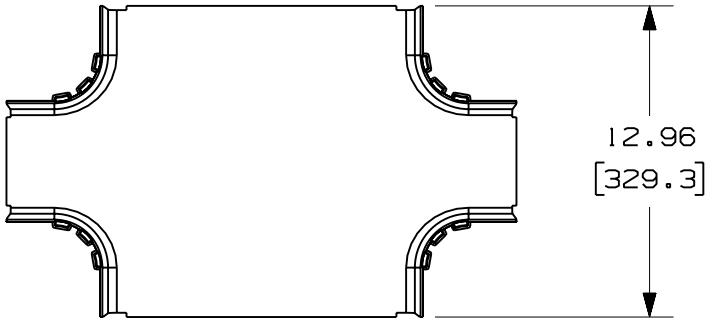

ENG. REF.: D39774BG\_DC/01 FRFWC12X4W4

CAD FILENAME/LAYERS: FRFWC12X4W4.pdf

| REV | DATE     | BY  | CHK | DESCRIPTION             | ECN      | R  | CUST | SUP | GMBH |
|-----|----------|-----|-----|-------------------------|----------|----|------|-----|------|
| 1   | 4-27-09  | MSO | SL  | A. REVISED PART WEIGHT. | 39774-07 | RN | RN   |     |      |
| R   | 10-22-08 | MSO | SL  | RELEASED TO PRODUCTION  | 39774-07 | RN | RN   |     |      |

**PANDUIT** CORP TINLEY PARK, ILLINOIS  
**FIBERRUNNER 12x4 FOUR-WAY CROSS WITH 4" EXITS (FRFWC12X4W4)**  
 CUSTOMER DRAWING

UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE:  
 (.X) ± (.XXX) ±  
 (.XX) ± .03 (.8) ANGLES ±

UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE GIVEN IN INCHES, THIRD ANGLE PROJECTION.

|                |            |                       |
|----------------|------------|-----------------------|
| DRAWN BY: MSO  | MAT'L: ABS | SCALE: NONE           |
| DATE: 10-22-08 |            | DRAWING NO.: 39774-07 |
| CHK'D: SL      |            | DWG SIZE: A           |