


MOUNTING HOLE LAYOUT

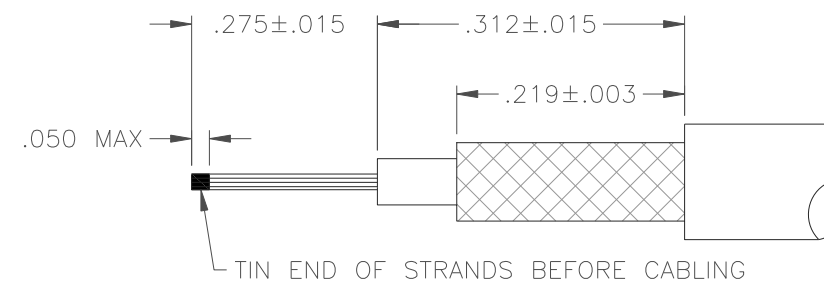

CABLE STRIP DIMENSIONS

NOTES: UNLESS OTHERWISE SPECIFIED.

1. MATERIAL & FINISH:

- 1.1 BODY : (142-9003-201) GOLD PLATED COPPER ALLOY
(142-9003-204) SILVER PLATED COPPER ALLOY
- 1.3 CRIMP SLEEVE: GOLD PLATED COPPER
(142-9003-204) SILVER PLATED COPPER

2. ELECTRICAL SPECIFICATIONS:

- 2.1 CABLE ACCEPTABILITY: RG 188, RG 316, RG 161,
RG 174, RG 179, RG 187
- 2.2 CABLE HEX CRIMP SIZE: .128
- 2.3 CABLE RETENTION: 20 LBS MIN OR CABLE BREAKING STRENGTH.

3. CONNECTOR MARKED "NM" FOR NON-MAGNETIC.

		JOHNSON	
	RoHS2 <input checked="" type="checkbox"/> 2011/65/EU	Title: CABLE TERMINATION STR PC MOUNT RG 316 NON-MAGNETIC	
<small>This PROPRIETARY Document is property of Cinch Connectivity Solutions. It is confidential in nature, non-transferable, and issued with the clear understanding that it is not to be traced or copied without permission and is returnable upon demand.</small>	<small>UNLESS OTHERWISE SPECIFIED UNITS: INCH</small>	Model No. 142-9003-201/210	Size B
<small>INTERPRET DRAWING IN ACCORDANCE WITH ASME Y14.5-2009.</small>	.XX ±.02 .XXX ±.005 ANGLES ±2°	Date: 8/09/2016	Sheet: 1 OF 1