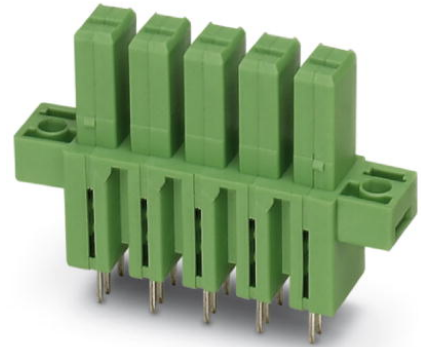



IPCV 5/ 8-GF-7,62

Order No.: 1708996

The figure shows a 5-pos. version of the product

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1708996>

Header, Nominal current: 41 A, Rated voltage (III/2): 630 V, Number of positions: 8, Pitch: 7.62 mm, Color: green, Metal surface: Sn, Assembly: Soldering

| Commercial data | |
|--------------------------|--|
| GTIN (EAN) |  4 046356 089975 |
| Note | Made-to-order |
| sales group | E521 |
| Pack | 50 pcs. |
| Customs tariff | 85366990 |
| Catalog page information | Page 397 (CC-2009) |

Product notesWEEE/RoHS-compliant since:
08/11/2005

<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

| Technical data | |
|-------------------------------|----------|
| Dimensions / positions | |
| Length | 12.8 mm |
| Pitch | 7.62 mm |
| Dimension a | 53.34 mm |
| Number of positions | 8 |

| | |
|----------------|---------|
| Pin dimensions | 1,2x0,8 |
| Pin spacing | 7.62 mm |
| Hole diameter | 1.3 mm |

Technical data

| | |
|-------------------------------------|---------------|
| Range of articles | IPCV 5/...-GF |
| Insulating material group | I |
| Rated surge voltage (III/3) | 6 kV |
| Rated surge voltage (III/2) | 6 kV |
| Rated surge voltage (II/2) | 6 kV |
| Rated voltage (III/2) | 630 V |
| Rated voltage (II/2) | 1000 V |
| Connection in acc. with standard | EN-VDE |
| Nominal current I_N | 41 A |
| Nominal voltage U_N | 630 V |
| Maximum load current | 41 A |
| Insulating material | PA |
| Inflammability class acc. to UL 94 | V0 |
| Nominal voltage, UL/CUL Use Group B | 300 V |
| Nominal current, UL/CUL Use Group B | 41 A |
| Nominal voltage, UL/CUL Use Group C | 300 V |
| Nominal current, UL/CUL Use Group C | 41 A |
| Nominal voltage, UL/CUL Use Group D | 600 V |
| Nominal current, UL/CUL Use Group D | 5 A |

Certificates / Approvals



Certification

CUL, UL

Address

PHOENIX CONTACT Deutschland GmbH
Flachmarktstr. 8
32825 Blomberg, Germany
Phone +49 5235 3 12000
Fax +49 5235 3 41200
<http://www.phoenixcontact.de>



© 2011 Phoenix Contact
Technical modifications reserved;