


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION  
 BY AMP INCORPORATED. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
DF	AO				
0		RELEASED	3-24-04	CT	SG

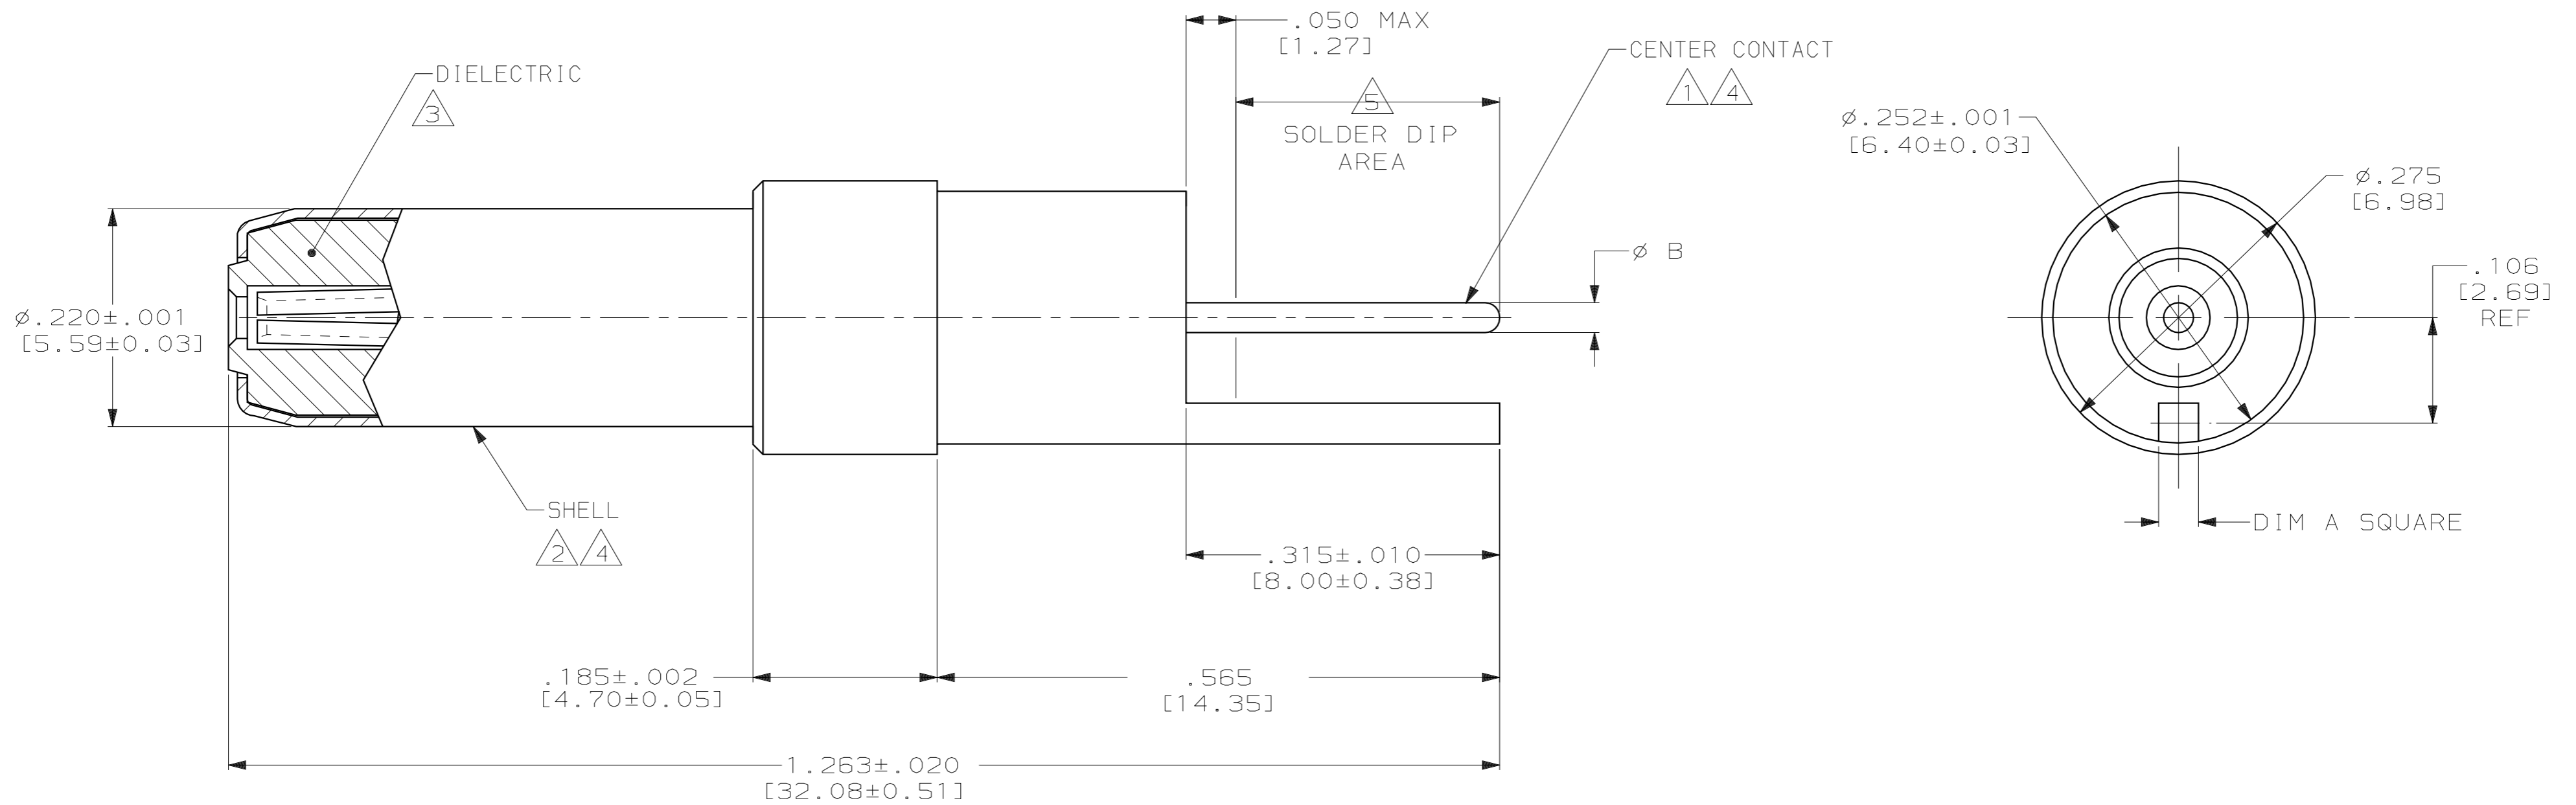

- ① BERYLLIUM COPPER PER ASTM-B-197 OR ASTM-B-643.
- ② BRASS PER ASTM-B-16.
- ③ PTFE PER ASTM-D-1710.
- ④ GOLD PLATE PER ASTM-B-488, TYPE 2, GRADE C, .000050 [0.00127] MIN THK OVER NICKEL PLATE PER QQ-N-290, .000050 [0.00127] MIN THK.
- ⑤ THIS AREA SOLDER COATED WITH SN60 OR SN63 SOLDER. (1663535-2 ONLY)

$.026$ [0.66] MAX	$.047$ [1.19] MAX	⑤	1663535-2
$.020 \pm .002$ [0.51 ± 0.05]	$.040 \pm .002$ [1.02 ± 0.05]	-	1663535-1
DIM B	DIM A	SOLDER DIP	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN	C.C. THOMAS	3-24-04	 TYCO Electronics Harrisburg, PA 17105-3608
CHK	S. GLATFELTER	3-24-04	
APVD	S. GLATFELTER	3-24-04	
PRODUCT SPEC			
APPLICATION SPEC			PIN CONTACT ASSY, COAX, SIZE 5, REAR RELEASE, POSTED, ARINC 600
MATERIAL	SEE CALLOUTS	FINISH	SEE CALLOUTS
WEIGHT	-	SCALE	8:1
CUSTOMER DRAWING		SHEET	1 OF 1
		REV	0