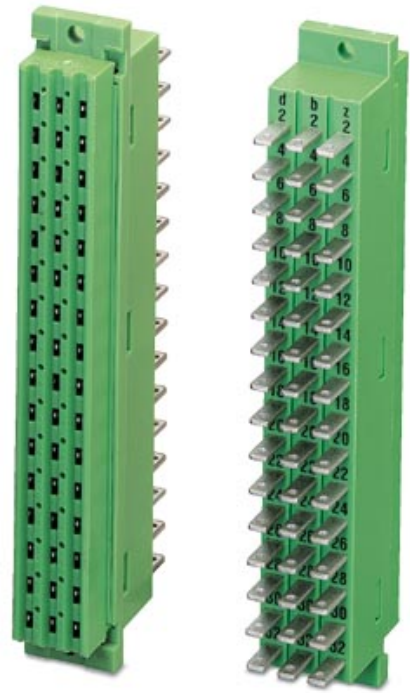



SFL (2,8-0,8)F48

Order No.: 2285315

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2285315>Flat connector socket, Number of positions: 48, Pitch: 0 mm, Color:
green**Commercial data**

GTIN (EAN)	 4 017918 055912
sales group	E310
Pack	10 pcs.
Customs tariff	85369010
Catalog page information	Page 279 (CC-2002)

Product notesWEEE/RoHS-compliant since:
01/01/2003

<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data

Dimensions / positions

Length	14.8 mm
Height	28.6 mm
Width	95 mm
Pitch	0 mm
Number of positions	48
Hole diameter	2.8 mm

Technical data

Range of articles	SFL (2,8-0,8)
Insulating material group	II
Rated surge voltage (III/3)	2.5 kV
Insulating material	PA-F
Inflammability class acc. to UL 94	HB

Certificates / Approvals



Certification GOST

Accessories


Item	Designation	Description
------	-------------	-------------

Cable/conductor

1406700	PT/FS 2,8	Plastic sheath, as touch protection, slide onto the conductor before for 2.8 slip-on sleeves
---------	-----------	--

Diagrams/Drawings

Dimensioned drawing

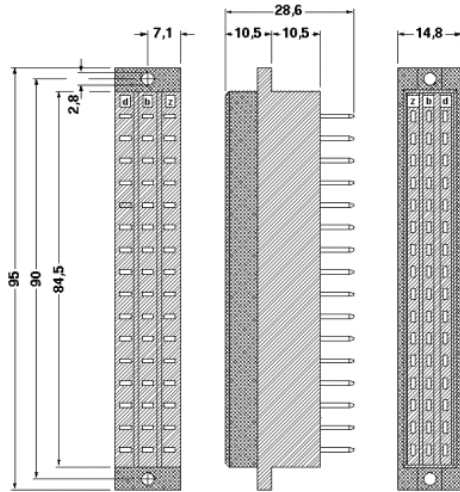

Address

PHOENIX CONTACT Deutschland GmbH
Flachmarktstr. 8
32825 Blomberg, Germany
Phone +49 5235 3 12000
Fax +49 5235 3 41200
<http://www.phoenixcontact.de>



© 2011 Phoenix Contact
Technical modifications reserved;