


HC-B 16-TFQ-76/O1STM32G-EMV

Order No.: 1642580

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1642580>

HEAVYCON sleeve housing B16, for double locking latch, height 76 mm, with thread M32, straight cable outlet, EMC version

Commercial data

| | |
|--------------------------|---|
| GTIN (EAN) |  4 046356 028493 |
| sales group | D002 |
| Pack | 5 pcs. |
| Customs tariff | 85389099 |
| Catalog page information | Page 519 (PC-2009) |

Product notesWEEE/RoHS-compliant since:
12/01/2005

<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.


Technical data**General data**

| | |
|--------|--|
| Note | For contact inserts HC-B16, BB32, D40, DD72, HS6, M, K |
| Design | B16 |
| Height | 76 mm |
| Width | 43 mm |
| Length | 94 mm |


| | |
|---------------------------------|--------------------------|
| Housing type | EMC housings |
| Locking type | For double locking latch |
| Cable exit | Straight |
| Type of the screw connection | 1x M32 |
| Degree of protection | IP65 |
| Ambient temperature (operation) | -40 °C ... 100 °C |
| Housing material | Aluminum, die-cast |
| Housing surface material | EMC coating, silver |

Diagrams/Drawings

Diagram

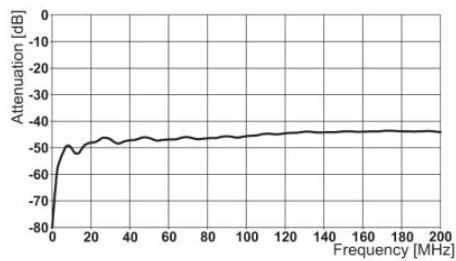

Dimensioned drawing

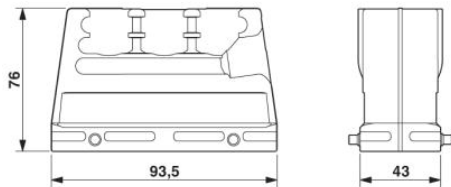

Address

PHOENIX CONTACT Deutschland GmbH
Flachmarktstr. 8
32825 Blomberg, Germany
Phone +49 5235 3 12000
Fax +49 5235 3 41200
<http://www.phoenixcontact.de>



© 2010 Phoenix Contact
Technical modifications reserved;