


AI 2,5 - 8 BU-B


Order No.: 3201408

The illustration shows version AI 1,5 - 8 in red

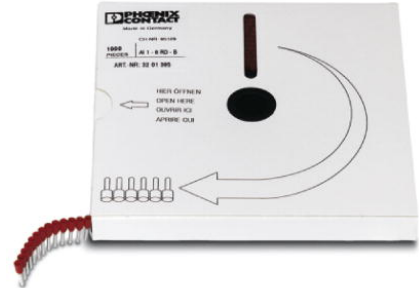

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=3201408>

Ferrules, 0.5 mm², taped, sleeve length: 8 mm, with plastic collar, galvanically tin-plated, color: blue, color range according to DIN 46228-4, CSA-certified

| Commercial data | |
|--------------------------|---|
| GTIN (EAN) |  |
| sales group | B256 |
| Pack | 500 pcs. |
| Customs tariff | 85369010 |
| Catalog page information | Page 660 (CL-2009) |

Product notes

WEEE/RoHS-compliant since:
11/07/2005



<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

| Technical data | |
|----------------|-------|
| General | |
| Length (b) | 14 mm |
| Color | blue |
| Material | E-CU |
| Sleeve length | 8 mm |

| | |
|--|---------|
| Inner dimension of the insulating collar (d) | 4.2 mm |
| Ferrule diameter | 2.3 mm |
| Insulating collar thickness | 0.3 mm |
| Sleeve wall thickness | 0.15 mm |

Certificates / Approvals




Certification

CSA, CSAus

Diagrams/Drawings

Dimensioned drawing

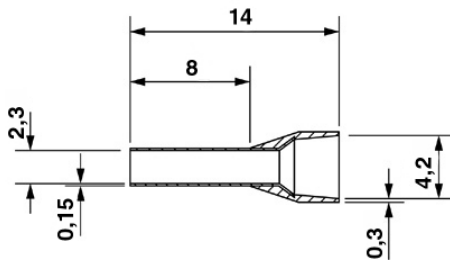

Address

PHOENIX CONTACT Deutschland GmbH
Flachmarktstr. 8
32825 Blomberg, Germany
Phone +49 5235 3 12000
Fax +49 5235 3 41200
<http://www.phoenixcontact.de>



© 2010 Phoenix Contact
Technical modifications reserved;