


Model Selector

Model	Voltage (V)	Voltage Adjust (V)	Current (A)	Power (W)	Eff. (Typ %)
DSP30-24/277A	24V	24 - 28V	1.25A	30W	87%

Outline Drawing

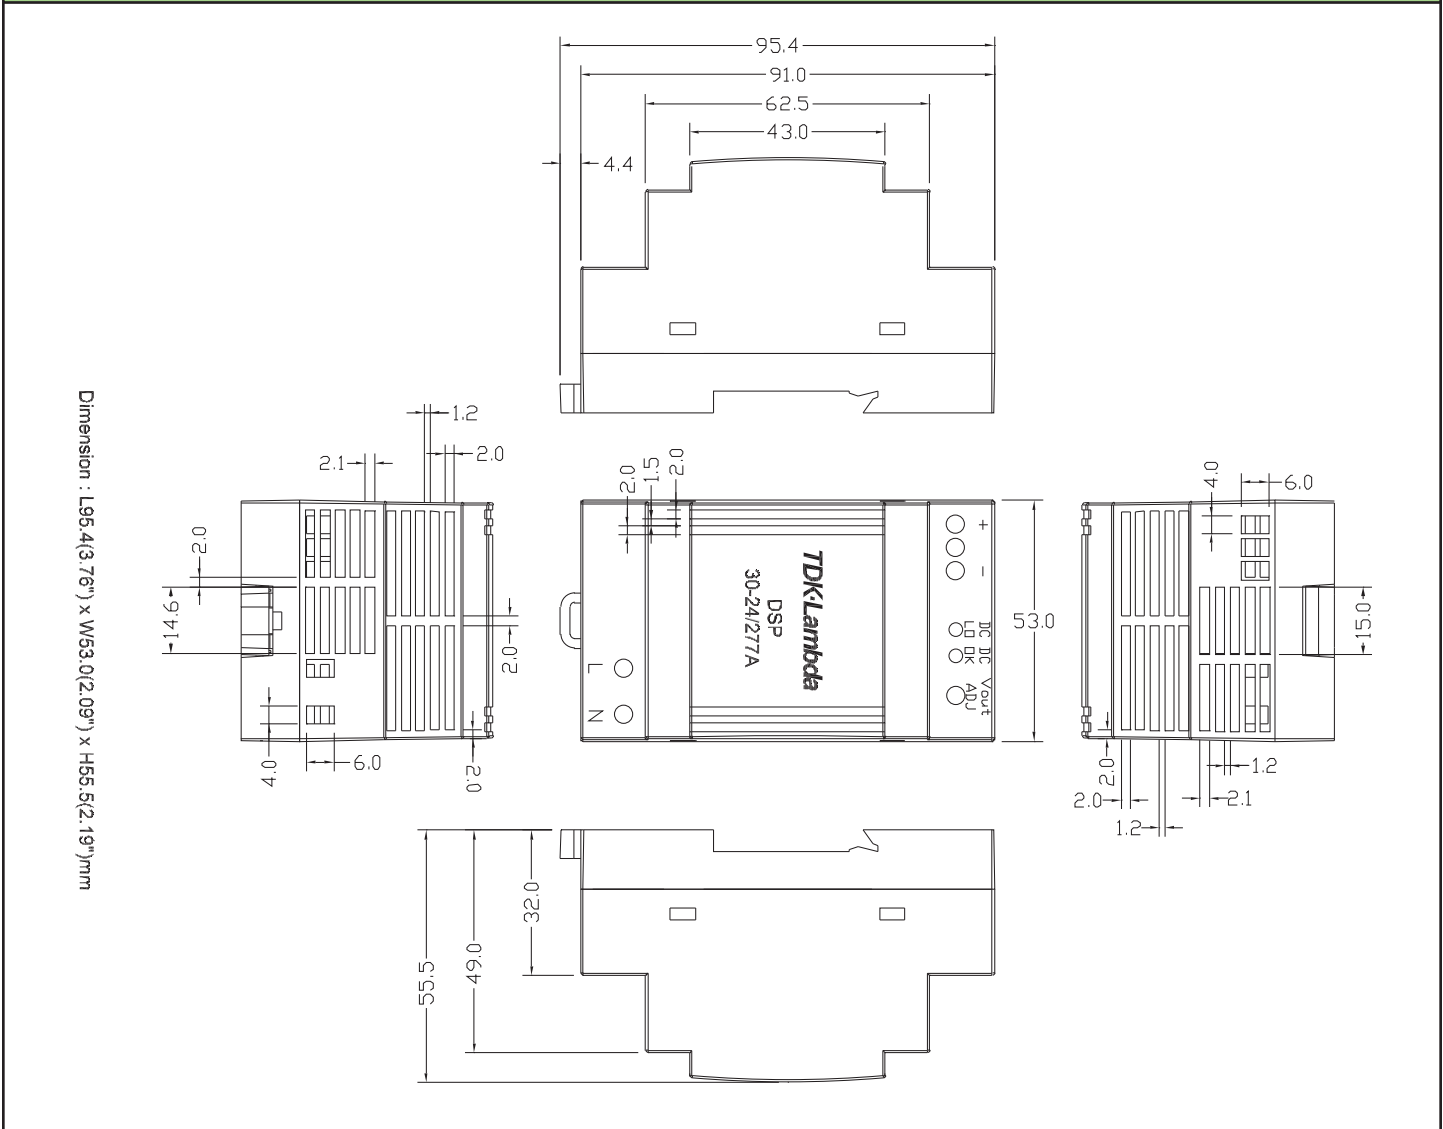

Other DIN Rail Products

DPP	10 to 960W single & three phase
DSP	15 to 100W low profile
DLP	75 to 240W

Output Cable Harness

Connector: AMP 3-640440-3
 Cable length 50mm
 Red = +24V, Black = 0V, White = Sync Signal

For Additional Information, please visit
us.tdk-lambda.com/lp/products/dsp-series.htm

