

INTERCONNECTS

SERIES 335, 364, 435, 464 • 2,54 GRID (0,46 DIA. PINS), LOW PROFILE • SINGLE AND DOUBLE ROW STRIPS

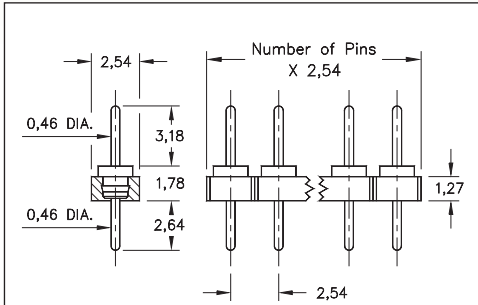


FIG. 1

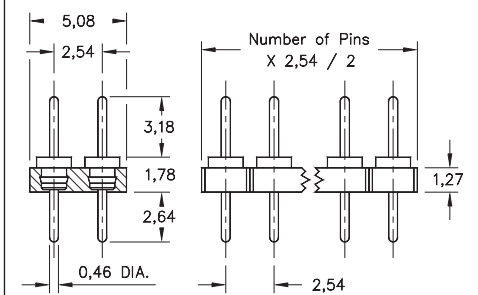


FIG. 2

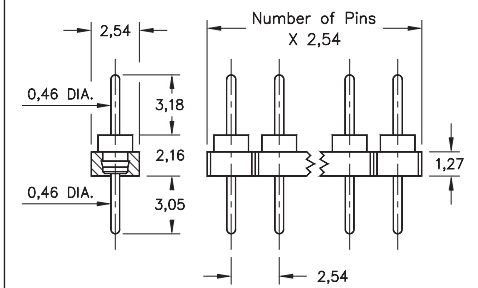


FIG. 3

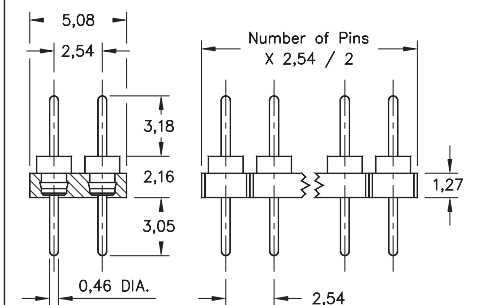


FIG. 4

- Series 335 and 435 single and double row PCB interconnects offer a 1,78 profile, the lowest available
- Series 364 and 464 single and double row PCB interconnects offer 2,16 profile above board
- Series 335 and 435 use MM #3516 pins. See page 212 for details
- Series 364 and 464 use MM #6458 pins. See page 213 for details
- Insulators are high temperature thermoplastic, suitable for all soldering operations



ORDERING INFORMATION

FIG. 1	Series 335...160 Single Row 1,78 Profile Pin Header
	335-XX-1__-00-160000 Specify number of pins 01-32
FIG. 2	Series 435...160 Double Row 1,78 Profile Pin Header
	435-XX-2__-00-160000 Specify number of pins 04-72
FIG. 3	Series 364...580 Single Row 2,16 Profile Pin Header
	364-10-1__-00-580000 Specify number of pins 01-32
FIG. 4	Series 464...580 Double Row 2,16 Profile Pin Header
	464-10-2__-00-580000 Specify number of pins 04-72
<div style="display: flex; justify-content: space-around; align-items: center;"> <div style="border: 1px solid black; padding: 5px; background-color: #90EE90;">RoHS - 2 2011/65/EU</div> <div style="border: 1px solid black; border-radius: 50%; padding: 5px;">XX=Plating Code See Below</div> <div style="border: 1px solid black; border-radius: 50%; padding: 5px;">For Electrical, Mechanical & Environmental Data, See page 264</div> </div>	
SPECIFY PLATING CODE XX=	10 ◆ 90 40 ◆
Pin Plating	0,25µm Au 5,08µm Sn/Pb 5,08µm Sn