
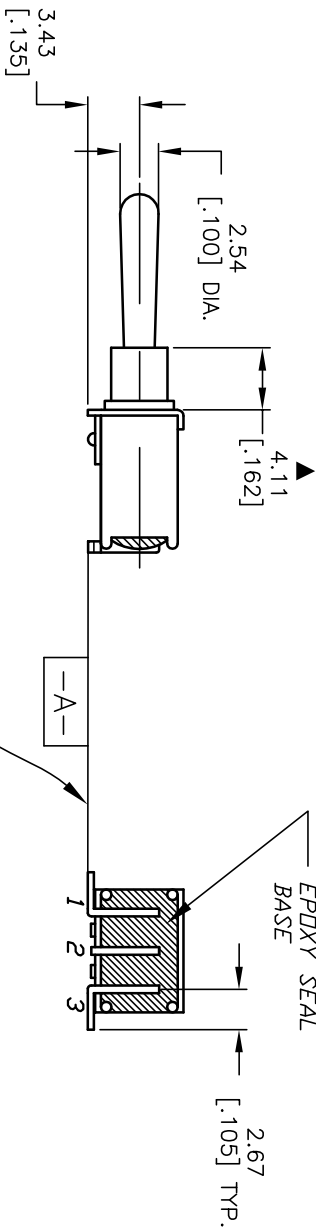

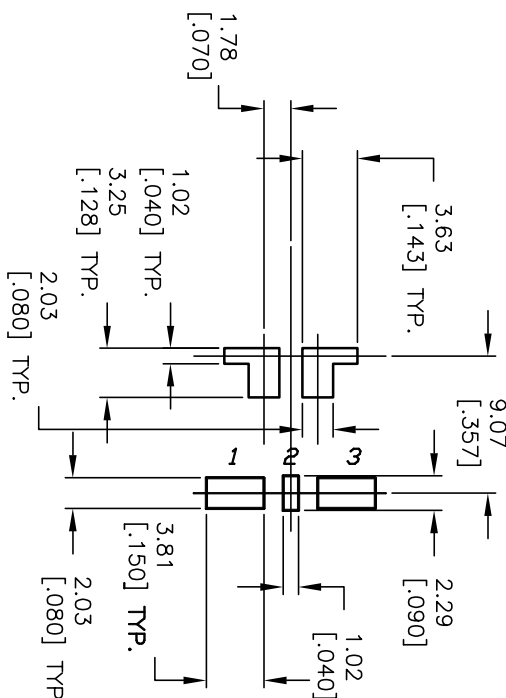


CIRCUIT: SPDT

CONTACT CONFIGURATION

SWITCH FUNCTION		
PDS. 1	PDS. 2	PDS. 3
DN	NONE	DN
2-3	DPEN	2-1

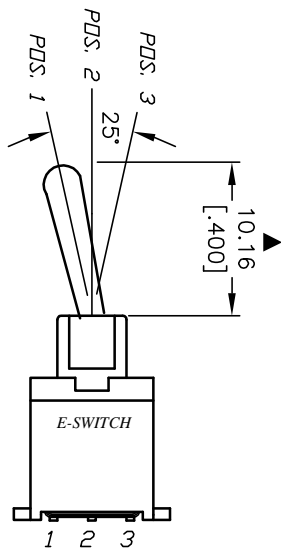

COPLANAR WITHIN 0.10 [0.004] TOTAL.

- NOTES:
1. ALL DIMENSIONS IN MM [INCH]
  2. GENERAL TOLERANCE: 0.0=±0.4  
0.00=±0.25
  3. TERM. NOS. FOR REF. ONLY
  4. CONTACT RATING: 0.4 VA max. @20 VAC or DC max.
  5. FIXED TERMINAL & MOVING CONTACT: Cu alloy w/Au plate over Ni plate.
  6. ELECTRICAL LIFE: 50,000 make-and-break cycle at full load.
  7. DIELECTRIC STRENGTH: 1,000 V RMS @sea level.
  8. OPERATING TEMP.: -30°C to 85°C
  9. PACKAGING: TAPE AND REEL
  10. ▲ DENOTES CRITICAL PARAMETER.

REV. A		13354		RELEASED FOR PRODUCTION		8/7/03		AR	
REV. A		ECN No.		DESCRIPTION		DATE		CHKD	
<p>THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED</p>									
TITLE		200BWMSP1T1A1SM6RE							
SCALE		2:1		DATE		8/7/03		DR AR	
SCALE		2:1		DATE		8/7/03		DWG T833024	
REV. A		13354		RELEASED FOR PRODUCTION		8/7/03		AR	