


RECOMMENDED P.C.B. LAYOUT



CIRCUIT (SHOWN 8 POS)

- NOTES:
1. ALL DIMENSIONS IN MM
 2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
 3. TERM. NOS. FOR REFERENCE ONLY.
 4. CONTACT RATINGS: 25ma @24VDC.
 5. CONTACT MATERIAL: Copper Alloy w/
gold plate over Nickel Plate.
 6. PACKAGED: IN DISPENSING TUBE.
 7. TRAVEL: 1.00mm (Actuator)
 8. Δ DESIGNATE MAJOR:

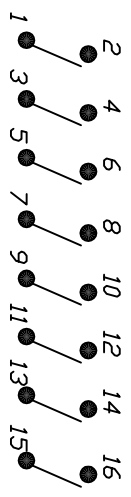

REV.	ECN NO.	DESCRIPTION	DATE	CHKD
A	11902	RELEASED FOR PRODUCTION	2/4/02	CB
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSMITTED				

SCALE	DATE	DR	DWG	REV
3:1	2/4/02	CJB	N111201	A
TITLE: KAN1108 R (1/2 PITCH)				