


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

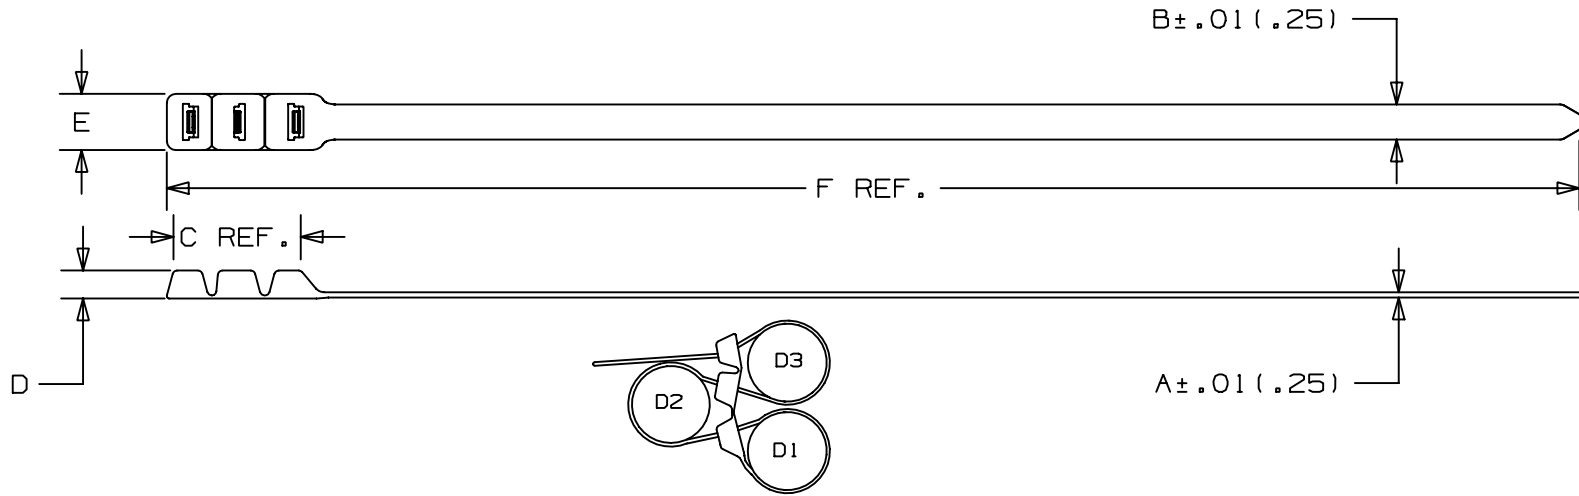

PANDUIT PART NO.*	MAX. COMBINED BUNDLE DIA. D1+D2+D3 in (mm)	A in (mm)	B in (mm)	C in (mm)	D in (mm)	E in (mm)	F in (mm)	MIN. LOOP TENSILE lbs (N)	CROSS SECTION	WEIGHT lbs/100 pcs. (g)
PL3B5EH	5.0 (127.0)	.075 (1.9)	.500 (12.7)	1.8 (45.7)	.40 (10.2)	.80 (20.3)	20.0 (508)	125 (556)	EXTRA HEAVY	3.82 (1782)

NOTES:

\* 1) SEE CURRENT PRICE SHEET FOR PART NUMBER SUFFIX DESIGNATION FOR PACKAGE SIZE AND PART COLOR.

DIMENSIONS IN PARENTHESES ARE IN METRIC UNITS										
										SS_27253_00.PRT
										PANDUIT CORP. TINLEY PARK, ILLINOIS
										BOW-TY CABLE TIES PLB SERIES
										UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: (.X) ± .X (.XXX) ± .XXX (.XX) ± .XX ANGLES ± 5°
										UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE GIVEN IN INCHES, THIRD ANGLE PROJECTION.
										DRAWN BY JABO
										MAT'L: NYLON 6/6
										SCALE NONE
R	3/30/00	JABO		DRAWING RELEASED	27253	R				DRAWING NO. SS-27253
REV	DATE	BY	CHK	DESCRIPTION	ECN	R	CUST	SUP		DWG SIZE A