

TG-39ULB


Black Polyester Film Laminated Aluminum Foil with Conductive Acrylic Adhesive

Product Description

TG-39ULB is a single sided conductive foil tape which consists of a black PET film, laminated aluminum foil backing and conducted non-woven embedded PSA

- Supplied on a removable liner for easy handling and die-cutting

Structure

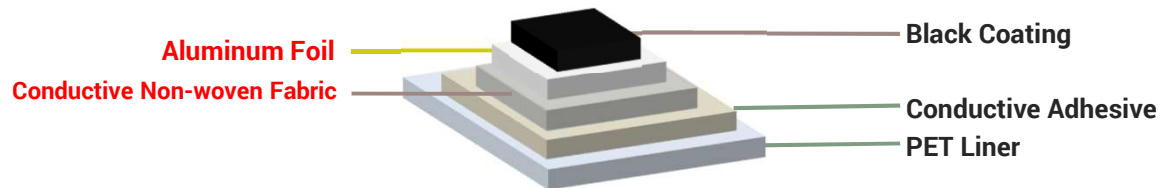

Typical Properties

Properties	Unit	Spec.	Test Method
Total Thickness	mm	0.06 ±0.01	
Adhesive Force	gf/25mm	1000	KS T 1028(SUS304)
Surface Resistance	Ω/sq	Less 0.1	MIL DTL 83528C
Top-bottom Resistance	Ω/in ²	Less 0.1	MIL DTL 83528C
Color	-	Black	
Use Temp.	°C	-30 to 105	ASTM D 3330

Application

