



VG10 Series

HIGH VOLTAGE SINGLE OUTPUT 10 WATTS DC/DC CONVERTERS



FEATURES

- 10W Output
- 250V High Voltage Output
- High Efficiency
- High Density
- Isolated & Regulated
- Operating Temperature: -25° C to +70° C
- Overvoltage Protection
- Overcurrent Protection
- 2:1 and 4:1 Input Voltage Range
- Industry Standard DIP Pinout

DISCRIPTION

The VG series is a high voltage, regulated & isolated DC/DC converter with 2:1 or optional 4:1 input voltage range. With a wide operating temperature range, built in overvoltage, and overcurrent protection, providing this unit with high reliability and long life.

ELECTRICAL SPECIFICATIONS

All specifications are typical at nominal input, full load, and 25° C unless otherwise noted.

INPUT SPECIFICATIONS

Input Voltage Range	2:1 (4:1 Optional)
---------------------	-----------------------

OUTPUT SPECIFICATIONS

Output Power	10 Watts Max
Switching Frequency	300KHz
Voltage Accuracy	± 1%
Ripple and Noise, 20MHz BW	1%
Line Regulation, Full Load	±0.2%
Load Regulation (No load to Full Load)	±0.5%
Temperature Coefficient	±0.02%/°C max
Transient Overshoot (25% Load Step Change)	±5%
Transient Resp. Recovery Time (25% Load Step Change)	400µsec
Short Circuit Protection	Hiccup, Auto Recovery
Overcurrent Protection	120% Max

GENERAL SPECIFICATIONS

Isolation Voltage	1500VDC
Isolation Resistance	100M Ohms
Isolation Capacitance	300pF
MTBF	5 x 10 ⁵ hours

ENVIRONMENTAL SPECIFICATIONS

Operating Temperature	-25° C to +70° C (with Derating)
Storage Temperature Range	-40° C to +105° C
Maximum Case Temperature	+85° C
Relative Humidity	5% to 90% RH
Vibration Resistance	5G
Cooling Type	Natural Cooling

PHYSICAL SPECIFICATIONS


Case Material	Aluminum
Base Plate Material	Non-Conductive Black Plastic
Potting Material	Epoxy (UL94-V0)
Dimensions	2.00 x 1.00 x 0.50 Inches (50.8 x 25.4 x 12.7mm)
Weight	26g (0.91oz)



VG10 Series

MODEL	INPUT VOLTAGE	OUTPUT VOLTAGE	OUTPUT CURRENT	% typ. EFF
VG10-12S250	9 ~ 18VDC	250VDC	40mA	81%
VG10-24S250	18 ~ 36VDC	250VDC	40mA	82%
VG10-24S250W	15 ~ 55VDC	250VDC	40mA	82%
VG10-48S250	18 ~ 36VDC	250VDC	40mA	81%
VG10-48S250W	15 ~ 55VDC	250VDC	40mA	81%


Dimensions:

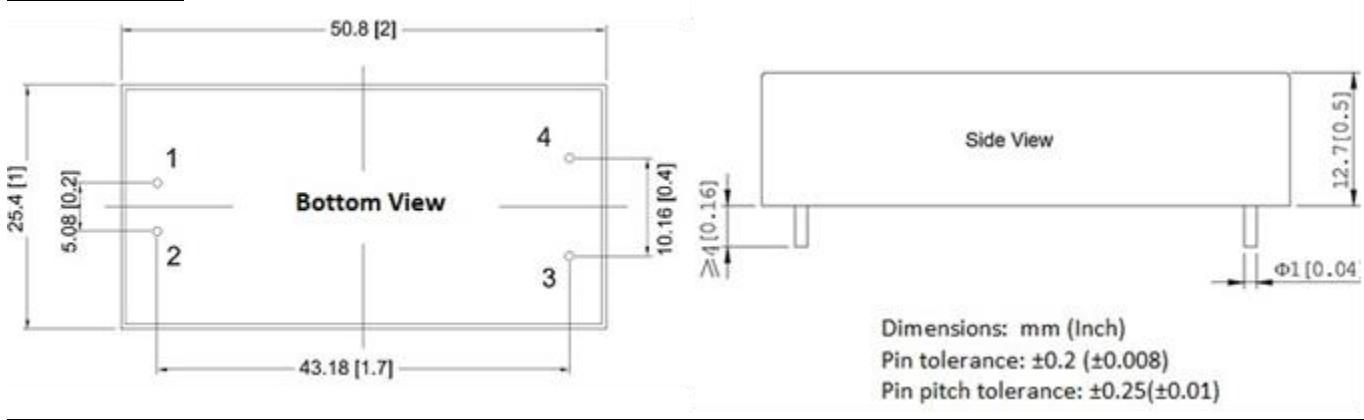


Pin Output:

PIN	1	2	3	4
SINGLE	+Vin	-Vin	-Vout	+Vout

Derating Curve:



Recommended Circuit:

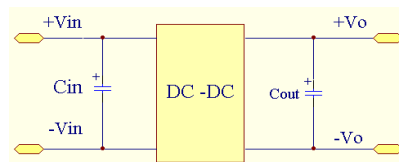

1. Module plus input capacitance C_{in} could help to improve the electromagnetic compatibility. It is recommended C_{in} use 47 μ F-100 μ F electrolytic capacitor.
2. Modules plus the output capacitor C_{out} could help to improve the module's output ripple.
3. C_{out} recommend to take standard 100 μ F/A. The current means output current