



used for: DIN EN 60603 TYPE "D"

SEE NOTE 3

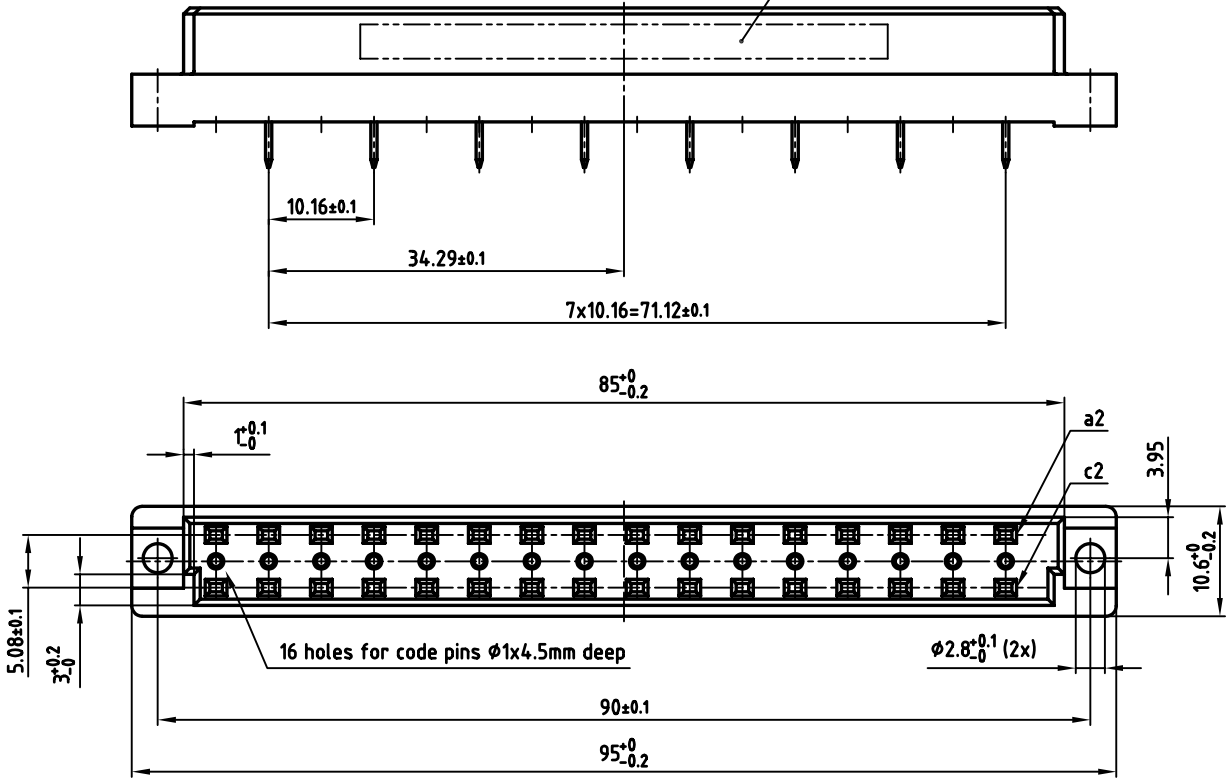

NOTES:

1. INSULATORS: PBTP GF UL 94 V-0, GREY
2. CONTACTS: COPPER ALLOY
PLATING: GOLD OVER NICKEL
50 MATING CYCLES
3. CONNECTOR IS PART MARKED: 122A13079X CONEC ABC

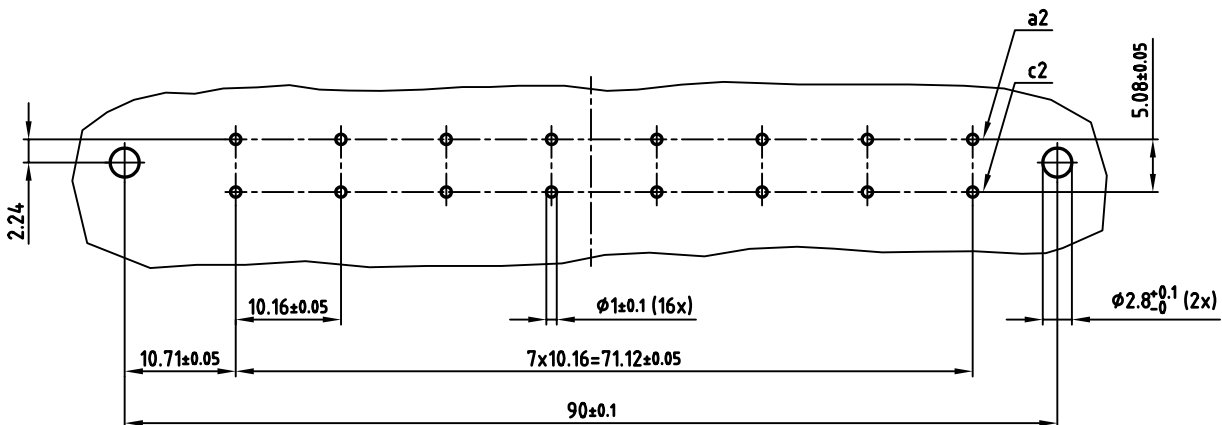

APPROVAL # FREIGABE # DEBLOCAGE # AUTORIZACION # APPROVAL	
CUSTOMER APPROVAL DATE:	
NAME:	TITLE:
COMPANY NAME:	
APPROVAL # FREIGABE # DEBLOCAGE # AUTORIZACION # APPROVAL	

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY, WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC Gmbh DO NOT ALTER CAD DRAWING BY HAND

rev.	description	date	name

tolerance		dim. in mm
2005	date	
drawn	04.11.	name
appd.	04.11.	Mickenbecker
norm	DIN EN 60603	
d-old		

scale:	2:1	
material:	SEE NOTES	
title:	FEMALE CONNECTOR TYPE "D" 16pos. SOLDER PIN 4mm ø 0.6mm	
dwg no:	AutoCAD 2004	DIN-A
	12K1A404	3
part no:	122A13079X	
		sh: 1/1