



REVISIONS				
P	LTM	DESCRIPTION	DATE	OWN APVD
A		RELEASED.ECO-17-004604	05MAY2017	GL CP
A1		RELEASED.ECO-17-011897	15AUG2017	TZ CP
B		RELEASED.ECO-17-013749	19SEP2017	GL CP
C		RELEASED.ECO-18-007459	24APR2018	FZ CP


CABLE PINOUT			
PAIR	PIN NAME	P1	P2
GROUND BUS	-	1	1
1	HF10_RX_DN(1)	2	2
	HF10_RX_DP(1)	3	3
GROUND BUS	-	4	4
GROUND BUS	-	28	4
2	HF10_RX_DN(2)	27	5
	HF10_RX_DP(2)	26	6
GROUND BUS	-	25	7
3	HF10_RX_DN(3)	5	8
	HF10_RX_DP(3)	6	9
GROUND BUS	-	25	10
4	HF10_RX_DN(4)	24	11
	HF10_RX_DP(4)	23	12
GROUND BUS	-	22	13
GROUND BUS	-	7	14
GROUND BUS	-	8	15
5	HF10_TX_DP(4)	9	16
	HF10_TX_DN(4)	10	17
GROUND BUS	-	21	18
6	HF10_TX_DP(3)	20	19
	HF10_TX_DN(3)	19	20
GROUND BUS	-	11	21
7	HF10_TX_DP(2)	12	22
	HF10_TX_DN(2)	13	23
GROUND BUS	-	14	24
GROUND BUS	-	18	24
8	HF10_TX_DP(1)	17	25
	HF10_TX_DN(1)	16	26
GROUND BUS	-	15	27

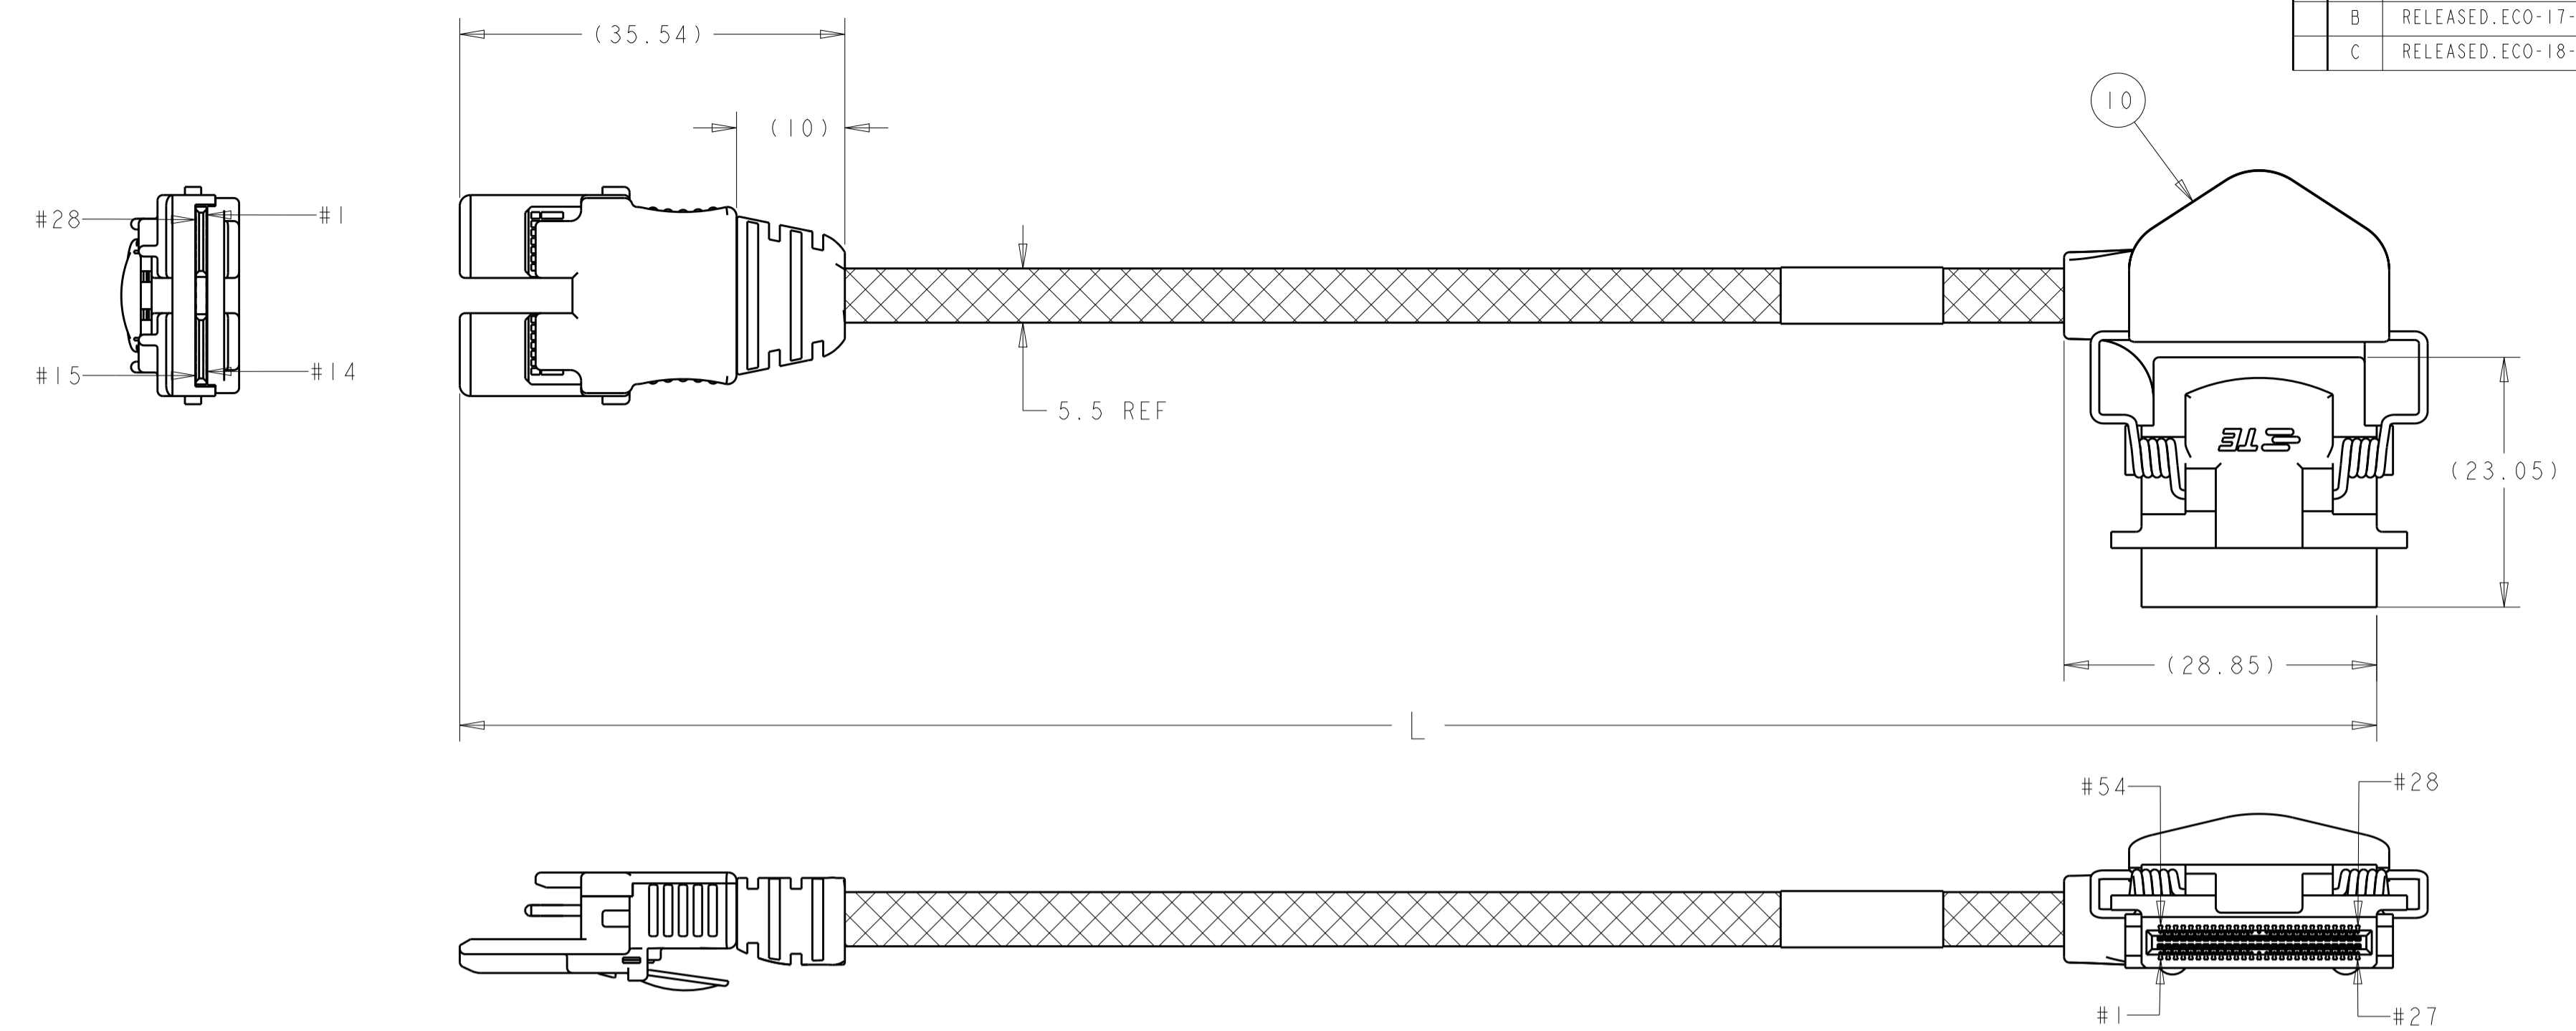

- THIS ASSEMBLY CONFORMS TO INTEL PART NO. (SEE TABLE).
  - EACH ASSEMBLY TESTED FOR OPENS, SHORTS AND SIGNAL INTEGRITY.
  - ALL MATERIALS, COMPONENTS, AND PROCESSES SHALL COMPLY WITH TEC-138-702 AND CONTAIN NO BANNED OR RESTRICTED SUBSTANCES.
  - EACH ASSEMBLY PACKAGED IN ESD MOISTURE BARRIER BAG WITH DESICCANT.
- 5 LABEL INFORMATION: 2821725-1, -2, -8, -9.

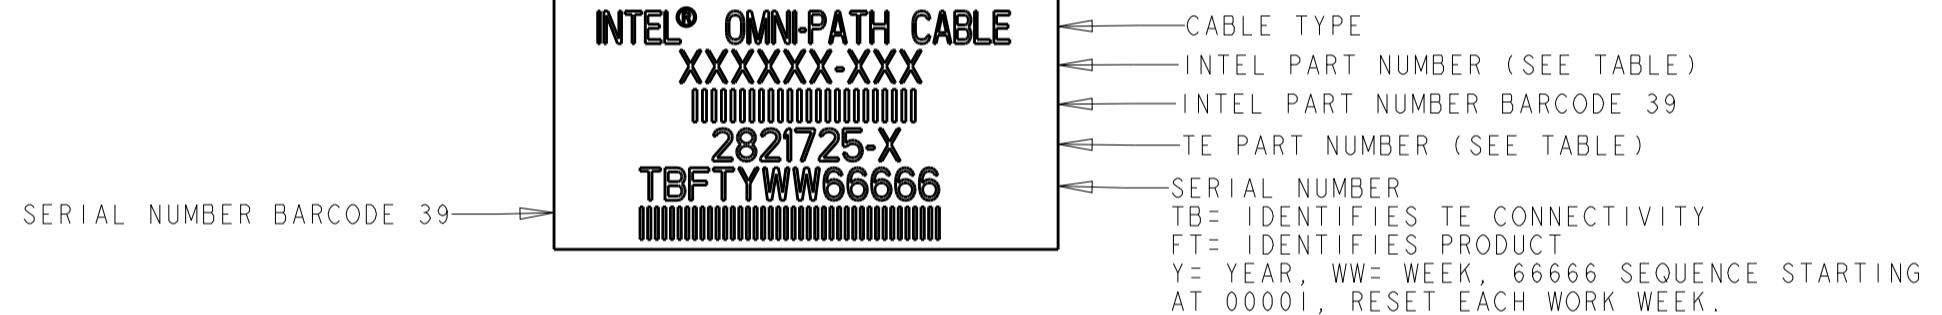

- 6 LABEL INFORMATION: 2821725-3, -4, -5.

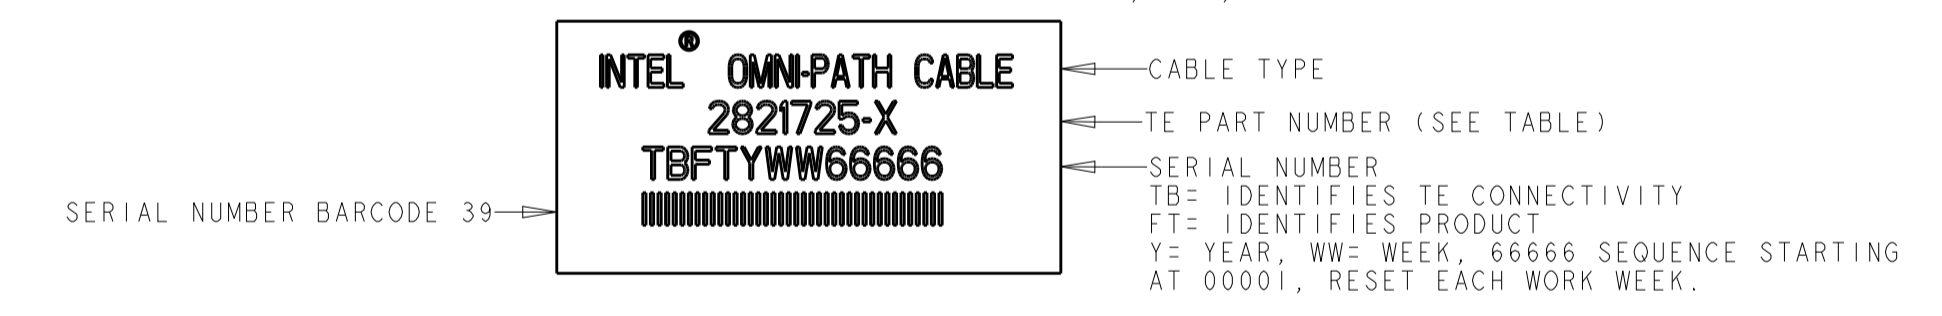

7. CABLE ASSEMBLY BUILT IN ACCORDANCE WITH INTEL DESIGN GUIDE 1.0

8 FINISH (CONTACT PADS): 30µm MINIMUM GOLD PER TE SPEC 112-162-1 OVER 100µm MINIMUM NICKEL PER TE SPEC 112-25-2

9 FINISH: 50µm MINIMUM GOLD PER TE SPEC 112-162-5, IN LOCALIZED GOLD PLATE AREA, OVER MINIMUM NICKEL PER TE SPEC 112-25-2 ON ENTIRE STOCK

10 CABLE PART #: 023B2LF023, CABLE SPEC: 104-1587


11 CABLE ASSEMBLY LENGTH OFFERED BY TE IS NOT REFERENCED WITHIN INTEL DESIGN GUIDE 1.0

12 REQUIRED SPECIAL PACKAGE FOLLOWING CUSTOMER SPEC: J51641\_Omnipath\_kit\_TE.docx AND BELOW TABLE.

PC-L6 SYSTEMS-GOLD	DESCRIPTION	UPC/EAN	MM	TA	TA REV	PBA#/ITEM/SPARE	TE CROSS PN
AXXCBL2351FPR1	IFT Omnipath Right 235 mm	UPC: 735858346078 EAN: 5032037106351	958250	J51641-001	I	H79272-005	2821725-8
AXXCBL3701FPS1	IFT Omnipath Right 370 mm	UPC: 735858346085 EAN: 5032037106368	958251	J51642-001	I	H79275-005	2821725-9

13. NO REACH SvHC SHALL BE CONTAINED ABOVE THE THRESHOLD AS DEFINED IN THE REACH SvHC COMPLIANCE DEFINITION WITHIN ANNEX A OF TEC-138-702.

14. ALL PRODUCT COMPONENTS AND PROCESSES SHALL MEET THE HALOGEN REQUIREMENTS OF CODE 2: Br<900ppm, Cl<900ppm, Br+Cl<1500ppm PER HOMOGENOUS MATERIAL.

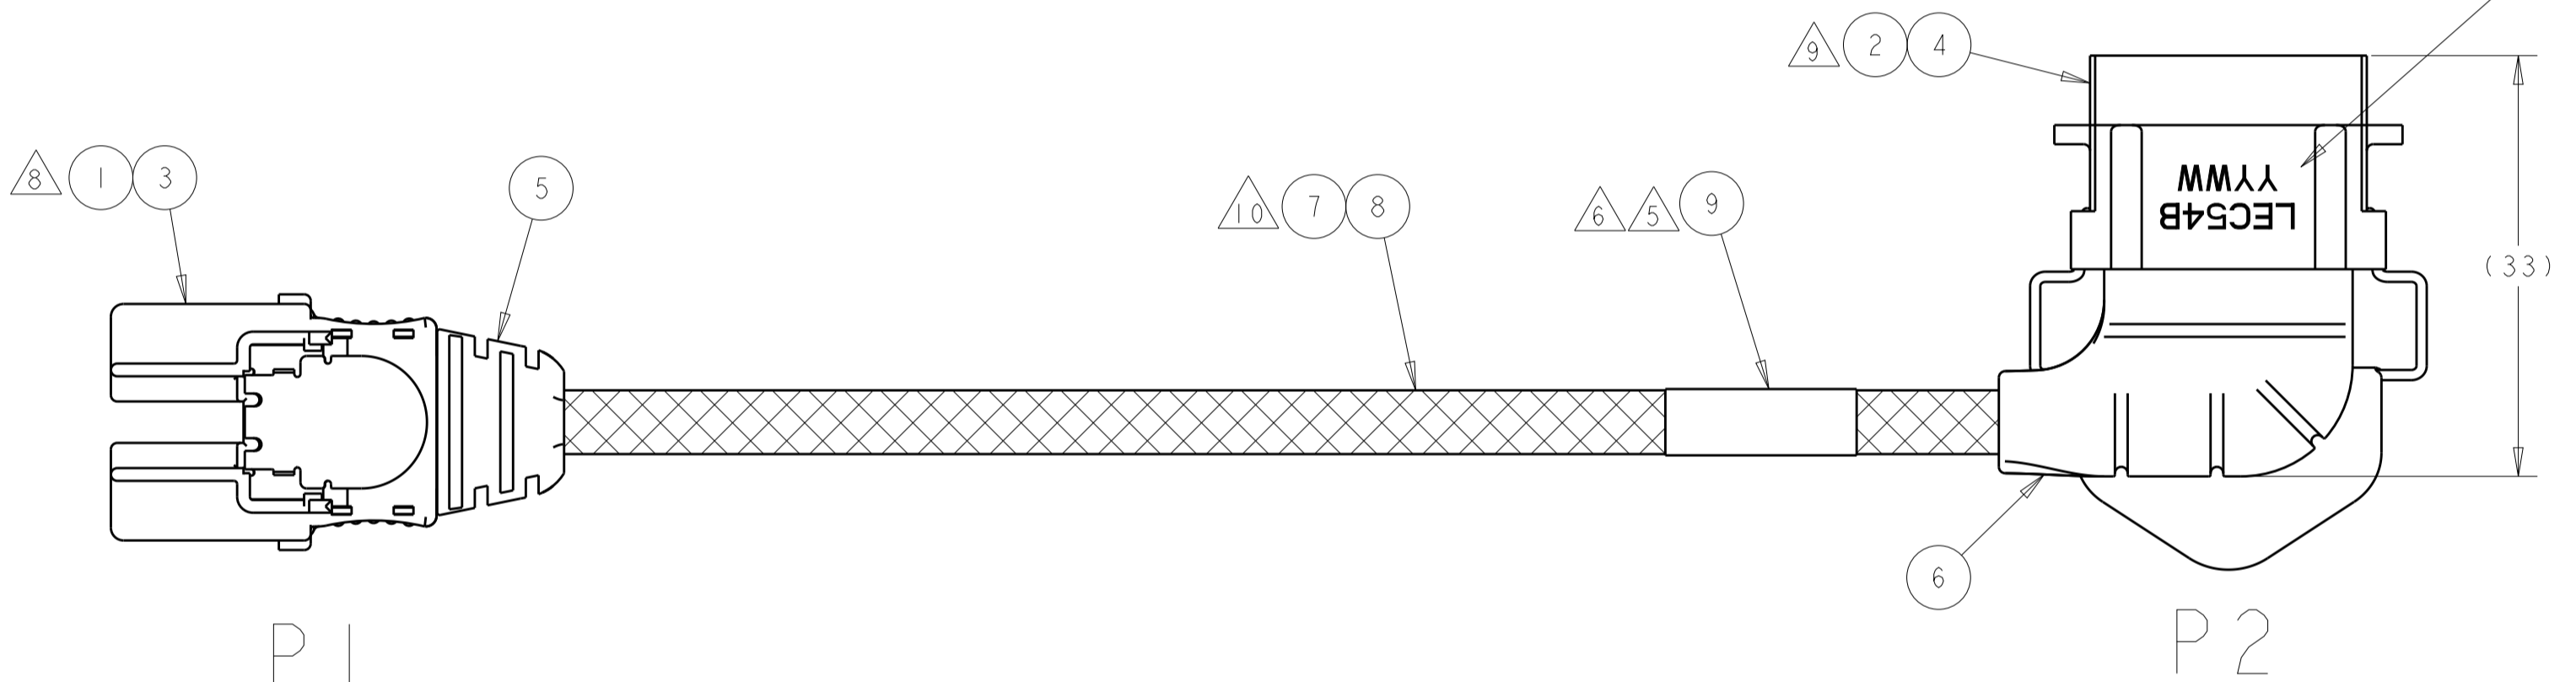

CONNECTOR MARKED WITH CONNECTOR TYPE AND DATE CODE

5	WRAP	370±5	H79275-005	2821725-9	12
5	WRAP	235±5	H79272-005	2821725-8	12
6	WRAP	405±5	-	2821725-5	
6	WRAP	300±5	-	2821725-4	
6	WRAP	500±5	-	2821725-3	11
5	WRAP	370±5	H79275-005	2821725-2	
5	WRAP	235±5	H79272-005	2821725-1	
LABEL TYPE		L	INTEL PART NO	TE PART NO	

I	I	I	I	I	I	I	I	I	PULL TAB	10
I	I	I	I	I	I	I	I	I	LABEL, WRAP	9
AR	AR	AR	AR	AR	AR	AR	AR	AR	SLEEVING, EXPANDABLE	8
AR	AR	AR	AR	AR	AR	AR	AR	AR	85 OHM TWINAX CABLE, 30AWG 25G TURBO TWIN™	7
I	I	I	I	I	I	I	I	I	OVERMOLDED STRAIN RELIEF, LECB	6
I	I	I	I	I	I	I	I	I	OVERMOLDED STRAIN RELIEF, IFP	5
I	I	I	I	I	I	I	I	I	DUST COVER, LECA (NOT SHOWN)	4
I	I	I	I	I	I	I	I	I	DUST COVER, IFP (NOT SHOWN)	3
I	I	I	I	I	I	I	I	I	LEC 54B RECPT, 54 POSN.	2
I	I	I	I	I	I	I	I	I	IFP PLUG, 28 POSN,	1
-9	-8	-5	-4	-3	-2	-1	DESCRIPTION			ITEM NO

THIS DRAWING IS A CONTROLLED DOCUMENT. OWN: T. SMITH 12JUL2016. CHG: C. POGASH 12JUL2016.

DIMENSIONS: mm. TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ±, 1 PLC ±, 2 PLC ±, 3 PLC ±, 4 PLC ±, ANGLES ±, FINISH ±.

MATERIAL: -. WEIGHT: -. CUSTOMER DRAWING.

NAME: IFP ASSEMBLY, TYPE B, RIGHT EXIT I-PORT, INVERTED.

SIZE: A1. CAGE CODE: -. DRAWING NO: 2821725. RESTRICTED TO: -. SCALE: 4:1. SHEET: 1 OF 1. REV: C.