

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

© COPYRIGHT - By TE CONNECTIVITY


ALL RIGHTS RESERVED.

LOC
HB


DIST
-

REVISIONS


P	LTR	DESCRIPTION	DATE	DWN	APVD
D		PN. OBSOLETE	ECO-12-004810	24-APR-12	BLJ, BHY

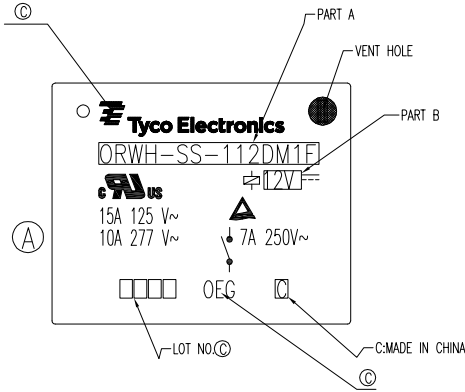


CIRCUIT DIAGRAM (BOTTOM VIEW)



DRILLING DIAGRAM (BOTTOM VIEW)

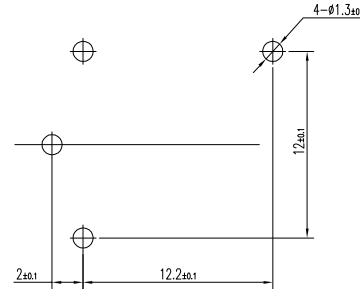

STATUS	TE PART NO	DESCRIPTION	PART B	PART A	ITEM
OBSOLETE	1721153-1	ORWH-SS-103DM1F, 000	3V	ORWH-SS-103DM1F	A
OBSOLETE	1721153-2	ORWH-SS-105DM1F, 000	5V	ORWH-SS-105DM1F	B
ACTIVE	1721153-3	ORWH-SS-106DM1F, 000	6V	ORWH-SS-106DM1F	C
OBSOLETE	1721153-4	ORWH-SS-109DM1F, 000	9V	ORWH-SS-109DM1F	D
ACTIVE	1721153-5	ORWH-SS-112DM1F, 000	12V	ORWH-SS-112DM1F	E
OBSOLETE	1721153-6	ORWH-SS-118DM1F, 000	18V	ORWH-SS-118DM1F	F
ACTIVE	1721153-7	ORWH-SS-124DM1F, 000	24V	ORWH-SS-124DM1F	G
OBSOLETE	1721153-8	ORWH-SS-148DM1F, 000	48V	ORWH-SS-148DM1F	H
OBSOLETE	1721153-9	ORWH-SH-103DM1F, 000	3V	ORWH-SH-103DM1F	I
OBSOLETE	1-1721153-0	ORWH-SH-105DM1F, 000	5V	ORWH-SH-105DM1F	J
OBSOLETE	1-1721153-1	ORWH-SH-106DM1F, 000	6V	ORWH-SH-106DM1F	K
ACTIVE	1-1721153-2	ORWH-SH-109DM1F, 000	9V	ORWH-SH-109DM1F	L
ACTIVE	1-1721153-3	ORWH-SH-112DM1F, 000	12V	ORWH-SH-112DM1F	M
OBSOLETE	1-1721153-4	ORWH-SH-118DM1F, 000	18V	ORWH-SH-118DM1F	N
ACTIVE	1-1721153-5	ORWH-SH-124DM1F, 000	24V	ORWH-SH-124DM1F	O
ACTIVE	1-1721153-6	ORWH-SH-148DM1F, 000	48V	ORWH-SH-148DM1F	P

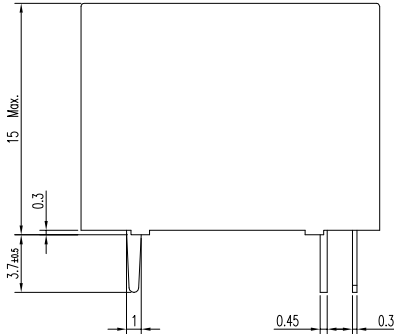

NOTE
 1. LOT NO. SYSTEM AS FOLLOWING:

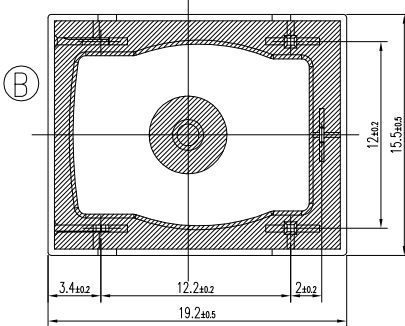


Diagram dimension	Tolerance
0.99mm max.	±0.1mm
1 - 2.99mm	±0.2mm
3mm min.	±0.3mm

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:	TOLERANCES UNLESS OTHERWISE SPECIFIED:
mm	
	±
	±
	±
	±
	±
	±
MATERIAL	FINISH
-	-

DWN	XN.ZHANG
CHK	WAYNE.PENG
APVD	MJ.HO
PRODUCT SPEC	-
APPLICATION SPEC	-
WEIGHT	-
CUSTOMER DRAWING	

UV RESIN	UV SEAL(FOR SH)	13		
EPOXY RESIN	SEAL	12		
CLASS 155 F	MW79	MAGNETIC WIRE	11	
	HCP	COIL TERMINAL	10	
UL94 V-0	PBT	BOBBIN	9	
UL94 V-0	PBT	CASE	8	
	Ag ALLOY	STATIONARY CONTACT	7	
	Ag ALLOY	MOVABLE CONTACT	6	
	Cu ALLOY	MOVABLE SPRING	5	
	Cu ALLOY	NO TERMINAL	4	
	Cu PLATED	STEEL	CORE	3
	Cu PLATED	STEEL	ARMATURE FORM A	2
	Ni PLATED	STEEL	YOKE	1
INCOMBUSTIBILITY TREATMENT	MATERIAL	DESCRIPTION	ITEM	

STE TE Connectivity

NAME: ORWH-1M CD FREE CUSTOMER DRAWING

SIZE: A3 CAGE CODE: 00779 DRAWING NO: 1721153 RESTRICTED TO: -

SCALE: 3:1 SHEET: 1 OF 1 REV: D