

**NOTES:**

1. THIS PRODUCT IS RoHS COMPLIANT
2. MATERIALS:  
HOUSING AND COVER: HIGH GRADE THERMOPLASTIC, UL94V-0 RATED, COLOR BLACK.  
CENTER PIN: BRASS, NICKEL PLATED PER QQ-N-290, CLASS 1.  
TIP, SLEEVE AND SHUNT TERMINALS: COPPER ALLOY, SILVER PLATED PER QQ-S-365
3. SPECIFICATIONS:  
LIFE: 5000 CYCLES.  
INSERTION FORCE: 5 LB [2.3 KG] MAX.  
WITHDRAWAL FORCE: 0.5 LB [0.2 KG] MIN.  
CONTACT RESISTANCE: 30 MILLIOHM MAX, 60 MILLIOHM MAX. AFTER TEST.  
INSULATION RESISTANCE: 30 MEGAOHM MIN. @ 100VDC.  
DIELECTRIC WITHSTANDING VOLTAGE: 250VAC FOR 1 MINUTE.  
CURRENT (CARRYING): 5A.

CUSTOMER DRAWING

REV	ECO NUMBER	DATE	BY	APVD
A	25129	8-30-05	JL	MW
REVISIONS				


★ STAR SYMBOL DENOTES CRITICAL DIMENSION

UNLESS OTHERWISE SPECIFIED

1. ALL DIMENSIONS IN INCHES  
- TWO PLACE DECIMALS ±0.01  
- THREE PLACE DECIMALS ±0.005  
- ANGLES ±1°  
- ALL DIA. CONCENTRIC WITHIN 0.005 T.I.R.
2. FEATURES ON THE SAME CENTERLINE MUST BE ALIGNED WITHIN ±0.002
3. REMOVE ALL BURRS

DO NOT SCALE DRAWING

THIS DRAWING DESCRIBES A DESIGN CONSIDERED PROPRIETARY IN NATURE, DEVELOPED AND MANUFACTURED BY SWITCHCRAFT INC. AND IS RELEASED ON A CONFIDENTIAL BASIS FOR IDENTIFICATION PURPOSES ONLY.									
SIZE		WIDTH		MULT		LBS/M		TEMPER	
FINISH SPEC No.						MATERIAL SPEC No.			
FIRST USED ON				SCALE 4:1		<b>Switchcraft</b> <sup>®</sup>			
DATE DRAWN	BY	CHKD	APVD						
30-Aug-05	JL	MW	MW	8-30-05	8-30-05	SHEET 1 OF 2			
NAME RA POWER JACK, HYBRID Ø0.080 PIN, RoHS						PART No.		REV	
						RASH722X		A	

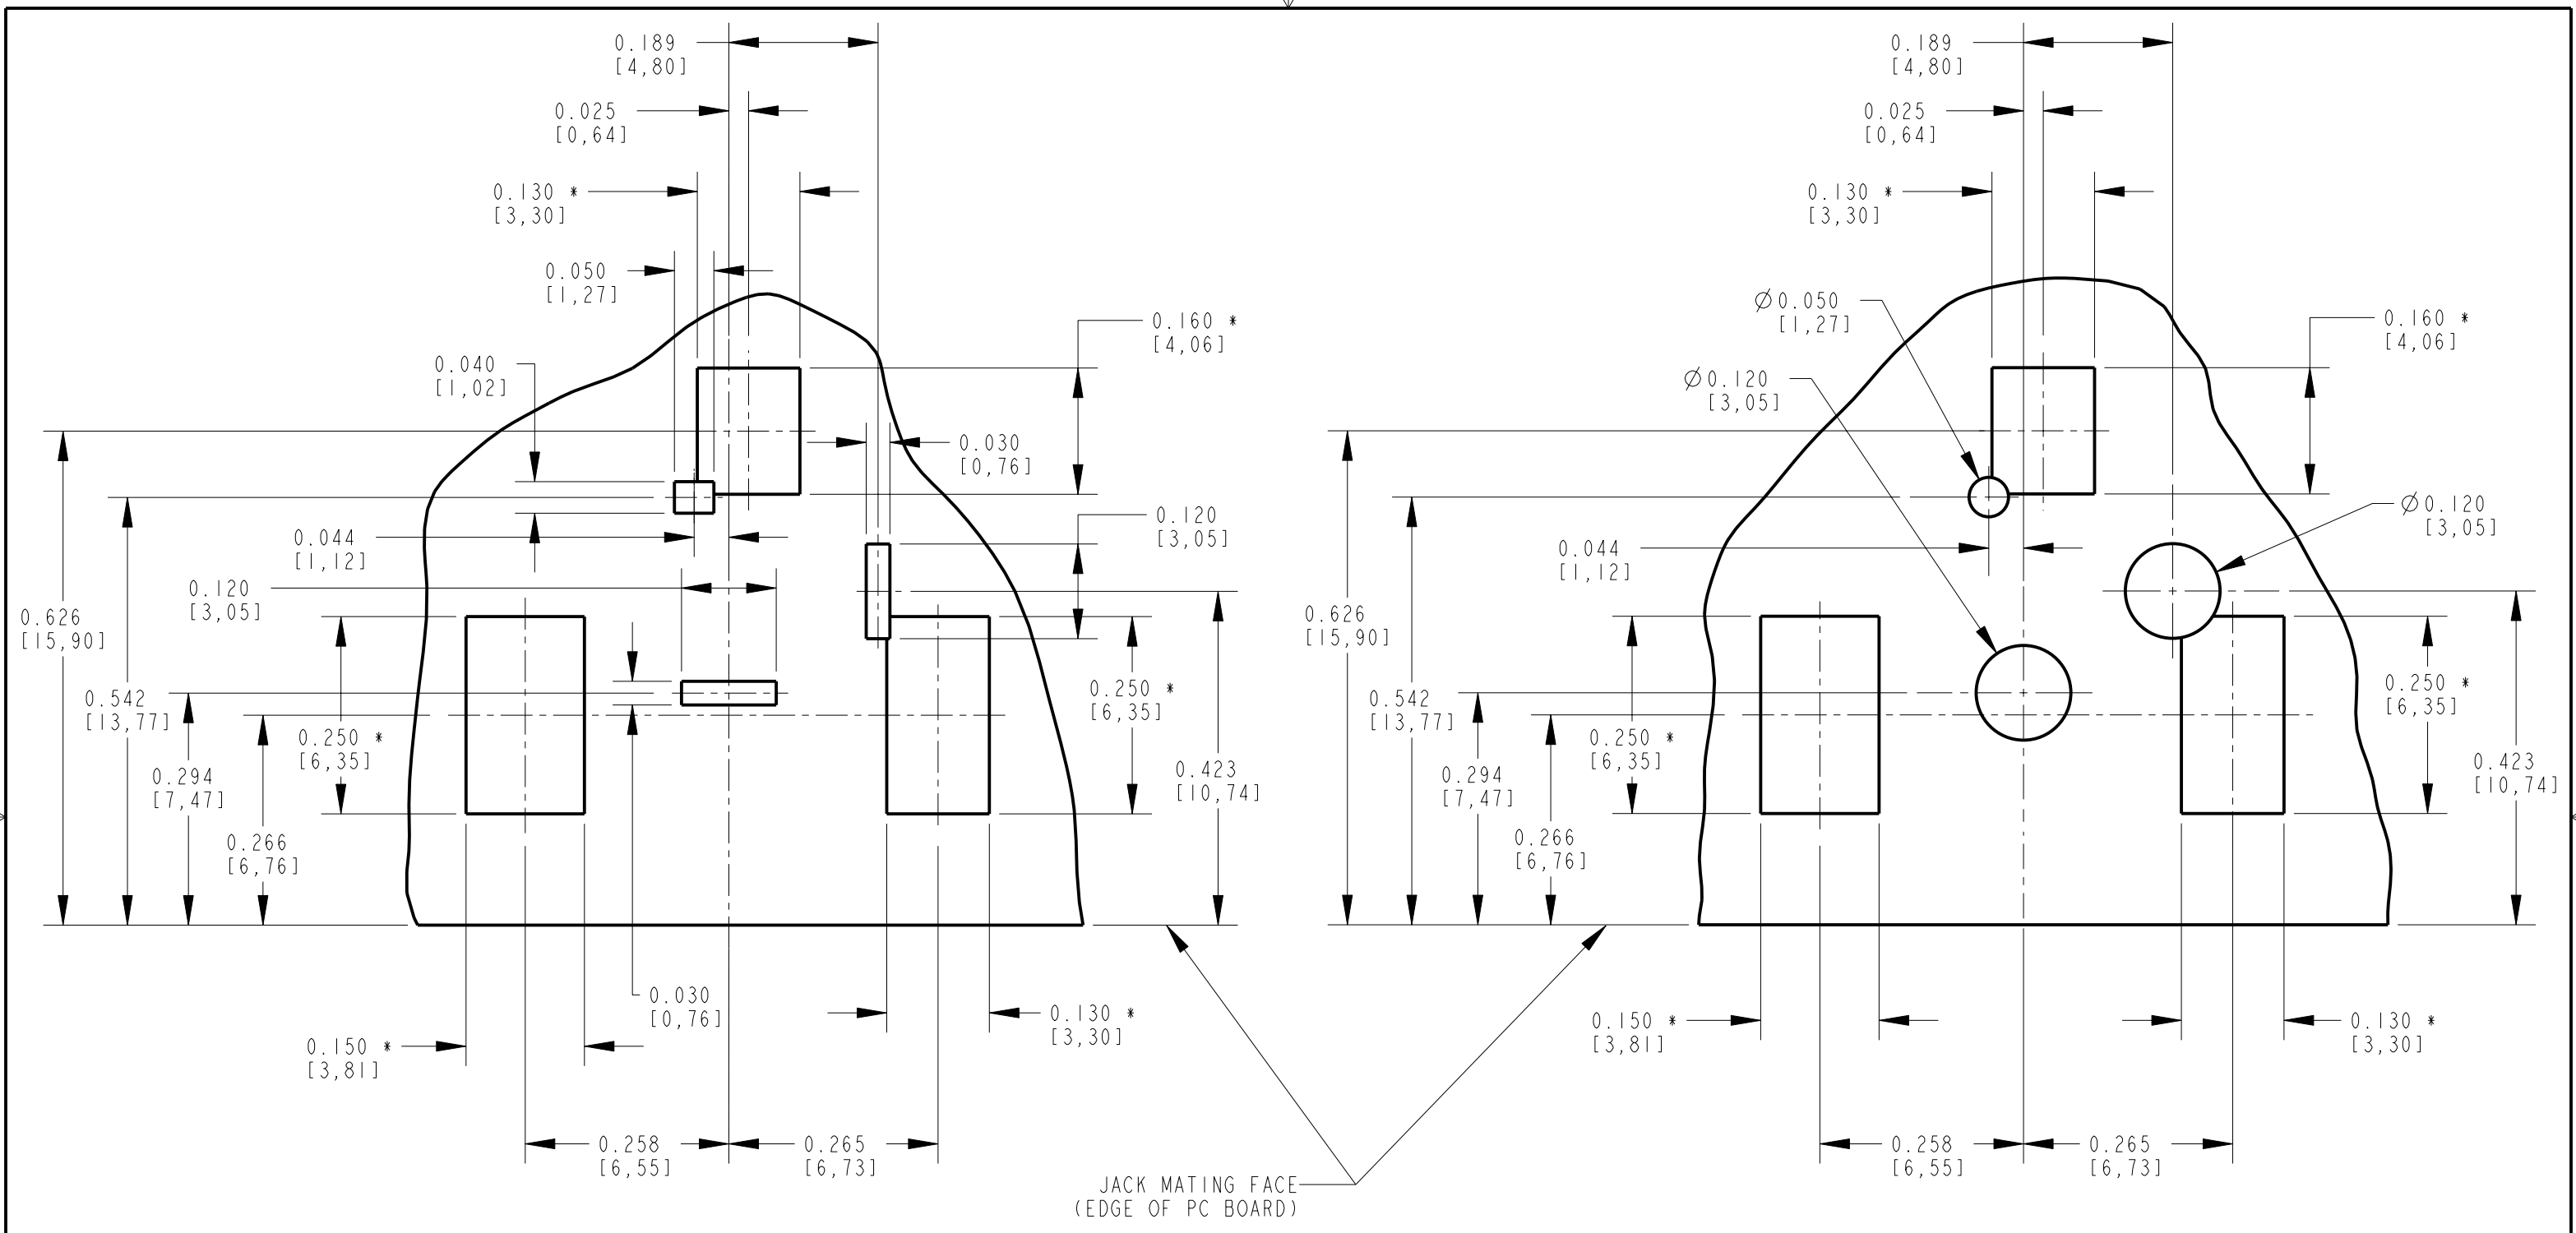

RECOMMENDED PC BOARD LAYOUT  
(COMPONENT SIDE)

ALTERNATE PC BOARD LAYOUT  
(COMPONENT SIDE)

NOTE: \* SURFACE MOUNT PADS.

CUSTOMER DRAWING

SCALE 4:1	<b>Switchcraft</b> <sup>®</sup>	
DATE DRAWN 30-Aug-05		
DRAWN BY JL	PART No. RASH722X	REV A