

SUMMARY



Image is for illustrative purpose only

Wires

| | |
|---------|---|
| Low | 0 |
| High | 0 |
| Coax | 1 |
| Triax | 0 |
| Quad | 0 |
| Fiber | 0 |
| Fluidic | 0 |

Download

[Request a quote](#)

[Catalog](#)

| | |
|------------------|-------------------|
| Series | 00 |
| Termination type | Female solder |
| IP rating | 50 |
| Cable Ø | 2.80 - 3.10 mm |
| Matching parts | FFA.00.250.CTAC29 |
| Status | NRND |
| Alternative part | PSA.00.250.CTLC31 |

TECHNICAL DETAILS

Mechanics

| | |
|-------------------|---|
| Shell Style/Model | PSA*: Fixed receptacle, nut fixing, with cable collet |
| Keying | Circular (can rotate) |
| Housing Material | Brass (chrome plated) shell and collet nut, nickel plated brass latch sleeve and mid pieces |
| Cable Fixing | C29: 2.8 - 3.1 mm |
| Variant | |

Performance

| | |
|---------------|------------------------|
| Configuration | 0.25 : 1 Coax (50 Ohm) |
| Insulator | T: PTFE |
| Rated Current | 4 Amps |

Specifications

| | |
|---------------|-------------------------|
| Contact Type: | Coaxial 50 Ohm (Solder) |
| Max. Matings: | 5000 |
| Contact Dia.: | 0.7 mm (0.028in) |
| Bucket Dia.: | 0.6 mm (0.024in) |
| Test voltage: | 2.1 kV (rms) |
| R (max): | 6.1 mOhm |

Vtest: 2100 V (AC), 3000 V (DC)


□
Impedance: 50 Ohm
VSWR: $1.09 + 0.11 * f/\text{GHz}$
Cable type: RG 316 /U

Others

Endurance (Shell): 5000 mating cycles
F ret (min): 100 N
IP Rating: 50

DRAWINGS

Draws

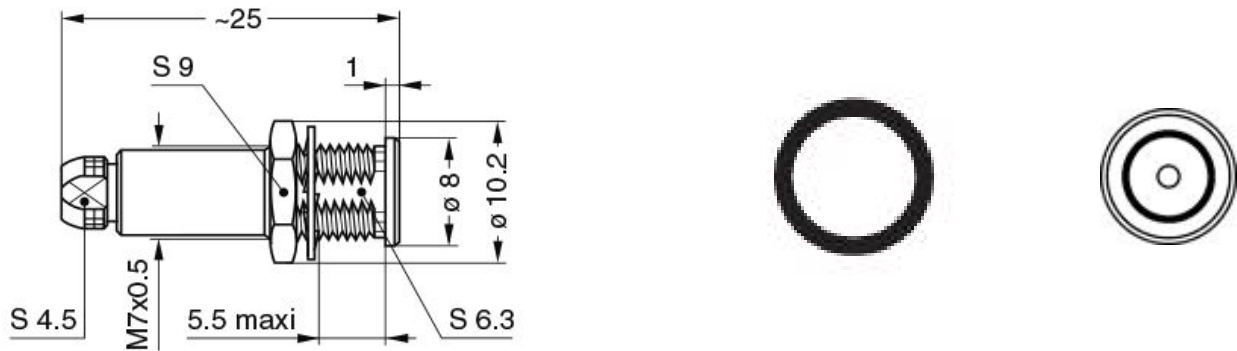

Dimensions

| | A | L |
|-----|------|------|
| mm. | 8 | 25 |
| in. | 0,31 | 0,98 |

RECOMMENDED BY LEMO

Tools

Spanner wrench: DCD.00.003.PA045

Cables