


THIS SPECIFICATION SHEET FORMS A PART OF THE LATEST ISSUE OF RAYCHEM SPECIFICATION 1200.

CONSTRUCTION DETAILS

ELECTRICAL CHARACTERISTICS

DIMENSIONS ARE NOMINAL VALUES IN INCHES UNLESS OTHERWISE DESIGNATED.

CHARACTERISTIC IMPEDANCE	100 ± 10 ohms, Method C at 1 MHz
CAPACITANCE - MUTUAL	16.0 pF/ft (nominal)

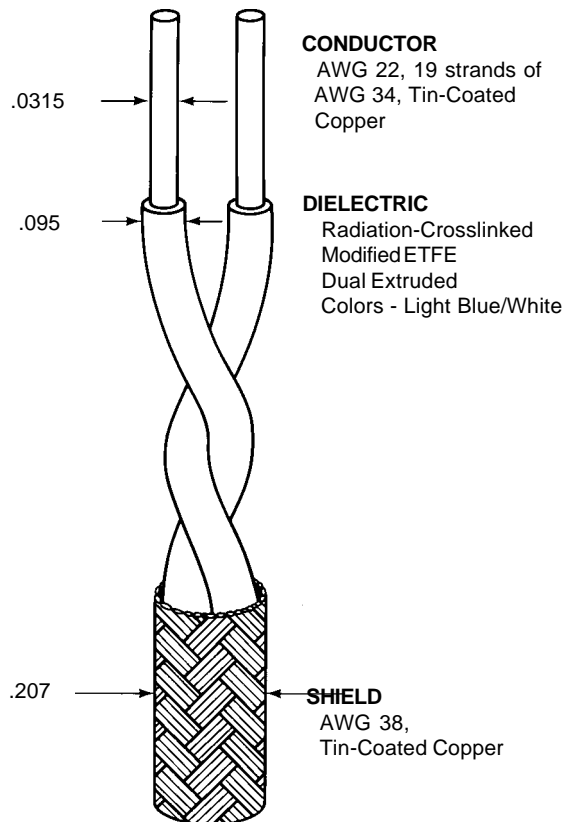

ADDITIONAL REQUIREMENTS

COMPONENT WIRE PRIOR TO CABLING
(Test Procedures per SAE AS22759)

CROSSLINK PROOF	300 ± 3°C for 1 hour, 1.00 inch mandrel, 1.75 lb., 2.5 kV dielectric test
LOW TEMPERATURE - COLD BEND SHRINKAGE	-65 ± 2°C for 4 hours, .750 inch mandrel, 1.00 lb., 2.5 kV dielectric test
INSULATION RESISTANCE INSULATION (DIELECTRIC) (total insulation)	200 ± 3°C for 1 hour, .125 inch (maximum) in 12 inches
TENSILE STRENGTH	5000 megohms for 1000 ft. (minimum)
ELONGATION	5000 lbf/in ² (minimum)
INSULATION FLAWS	50% (minimum)
SPARK TEST	3.0 kV (rms)
IMPULSE TEST	8.0 kV (peak)

FINISHED CABLE (Test Procedures per NEMA WC27500)

SHIELD COVERAGE	90% (minimum)
VOLTAGE WITHSTAND (DIELECTRIC)	1500 volts (rms)
WEIGHT	23.6 lbs/1000 ft. (nominal)

Other codes and suffixes may be added to the part number, as necessary, to capture any additional requirements imposed by the purchase order.

Users should evaluate the suitability of this product for their application. Specifications are subject to change without notice. Tyco Electronics also reserves the right to make changes in materials or processing, which do not affect compliance with any specification, without notification to Buyer.